

DECLARACIÓN DE PRESTACIONES

DoP 0197

para el anclaje- perno fischer FH II, FH II-I (anclaje mecánico para uso en hormigón)

ES

1. <u>Código de identificación única del producto tipo:</u>	DoP 0197			
2. <u>Usos previstos:</u>	Fijación a posteriori en hormigón fisurado y no fisurado. Véase el apéndice, especialmente los anexos B1- B6			
3. <u>Fabricante:</u>	fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Alemania			
4. <u>Representante autorizado:</u>	-			
5. <u>Sistemas de evaluación y verificación de la constancia de las prestaciones (EVCP):</u>	1			
6. <u>Documento de evaluación europeo:</u>	EAD 330232-00-0601 (Edition 10/ 2016)			
Evaluación técnica europea:	ETA-07/0025; 2020-09-23			
Organismo de evaluación técnica:	DIBt- Deutsches Institut für Bautechnik			
Organismos notificados:	1343 MPA Darmstadt / 2873 TU Darmstadt			
7. <u>Prestaciones declaradas:</u>				
Resistencia mecánica y estabilidad (BWR 1)				
Resistencia característica a tracción (carga estática y cuasi-estática):	Resistencia de rotura del acero:	Anexos C1, C2	E _s = 210 000 MPa	
	Résistance à la rupture par extraction glissement:	Anexos C1, C2		
	Resistencia de rotura por cono de hormigón:	Anexos C1, C2		
	Robustez:	Anexos C1, C2		
	Distancia mínima entre el borde y el centro:	Anexo C7		
	Distancia al borde para evitar la rotura del acero sometido a carga:	Anexos C1, C2		
	Desplazamiento por carga estática y cuasi-estática:	Anexos C10, C11		
	Resistencia característica a cortante (carga estática y cuasi-estática):	Resistencia de rotura del acero (esfuerzo cortante):		Anexos C3, C4
		Resistencia falla por arrancamiento lateral:		Anexos C3, C4
		Resistencia de rotura del hormigón al borde:		Anexos C3, C4
Desplazamiento por carga estática y cuasi-estática:		Anexos C10, C11		
Resistencia y desplazamientos característicos para las categorías sísmicas C1 y C2:	Durabilidad:	Anexos A4, B1		
	Resistencia de rotura del acero:	Anexos C8, C9		
	Résistance à la rupture par extraction glissement:	Anexos C8, C9		
	Alargamiento de rotura:	>8%		
	Factor espacio anular:	Anexos C8, C9		
	Desplazamientos:	Anexo C11		
Seguridad en caso de incendio (BWR 2)				
Reacción al fuego:	Clase (A1)			
Resistencia al fuego:	Resistencia al fuego, rotura del acero (carga de	Anexo C5		
	Resistencia al fuego, a la extracción (carga de	Anexo C5		
	Resistencia al fuego, rotura del acero (esfuerzo	Anexo C6		



8. Documentación técnica adecuada o documentación técnica específica: -

Las prestaciones del producto identificado anteriormente son conformes con el conjunto de prestaciones declaradas. La presente declaración de prestaciones se emite, de conformidad con el Reglamento (UE) no 305/2011, bajo la sola responsabilidad del fabricante arriba identificado.

Firmado por y en nombre del fabricante por:

ppa. Thilo Prg

Thilo Pregartner, Dr.-Ing.
Tumlingen, 2020-10-06

i.V. P. Sch

Peter Schillinger, Dipl.-Ing.

Esta DdR se ha preparado en distintos idiomas. En caso de que haya alguna controversia sobre la interpretación prevalecerá siempre la versión inglesa.

El Apéndice incluye información voluntaria y complementaria en idioma inglés que excede los requisitos legales (de idioma neutral).

Specific Part

1 Technical description of the product

The fischer High-Performance Anchor FH II, FH II-I is an anchor made of galvanised steel (sizes with external diameter 10, 12, 15, 18, 24, 28 and 32, sizes with internal thread 12/M6 I, 12/M8 I, 15/M10 I and 15/M12 I) or stainless steel (sizes with external diameter 10, 12, 15, 18 and 24, sizes with internal thread 12/M6 I, 12/M8 I, 15/M10 I and 15/M12 I) which is placed into a drilled hole and anchored by torque-controlled expansion.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the fastener is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the fastener of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex C 1, C 2, C 7
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C 3 and C4
Displacements (static and quasi-static loading)	See Annex C 10, C 11
Characteristic resistance and displacements for seismic performance categories C1 and C2	See Annex C 8, C 9, C 11
Durability	See Annex B 1


3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C 5, C 6

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with the European Assessment Document EAD 330232-01-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

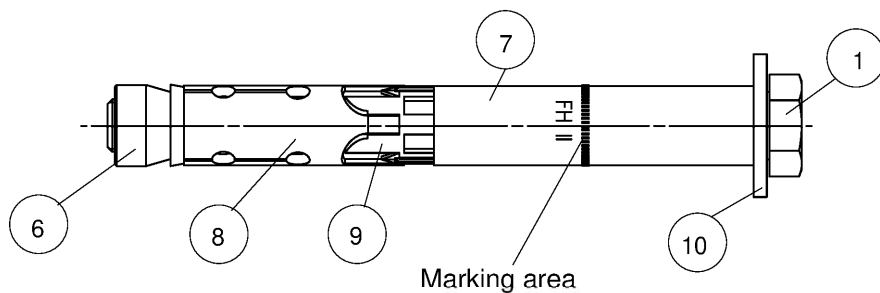

Type hexagon screw **S**

FH II 10 - 32 S

FH II 10 - 24 S R

Product label, example:

Brand

Type of fastener






FH II

15/25 R

Identification R

Nominal drill hole diameter/max. thickness of fixture (t_{fix})



Type countersunk screw **SK**

FH II 10 - 18 SK

FH II 10 - 18 SK R

Type hexagon nut **B**

FH II 10 - 32 B

FH II 10 - 24 B R

Type cap nut **H**

FH II 10 - 24 H

FH II 10 - 24 H R



Hexagon screw



Countersunk screw



Cap nut



Hexagon nut



Threaded rod



Cone nut



Distance sleeve



Expansion sleeve



Plastic sleeve




Washer



Conical washer



Internal thread socket

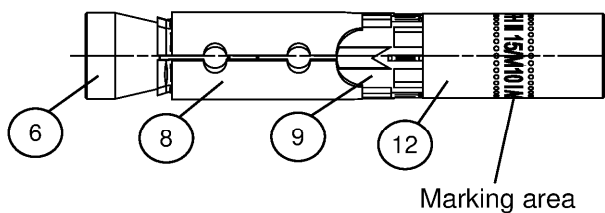

Type internal threaded anchor **I**

FH II 12 M6-I or M8-I

FH II 15 M10-I or M12-I

Product label, example:

Brand

Type of fastener



FH II

12/M8-I R

Identification R

Nominal drill hole diameter / size of internal thread

(Fig. not to scale)

fischer High-Performance Anchor FH II, FH II-I

Product description

Anchor types FH II, FH II R, FH II-I, FH II-I R

Annex A 1

Appendix 2/ 22

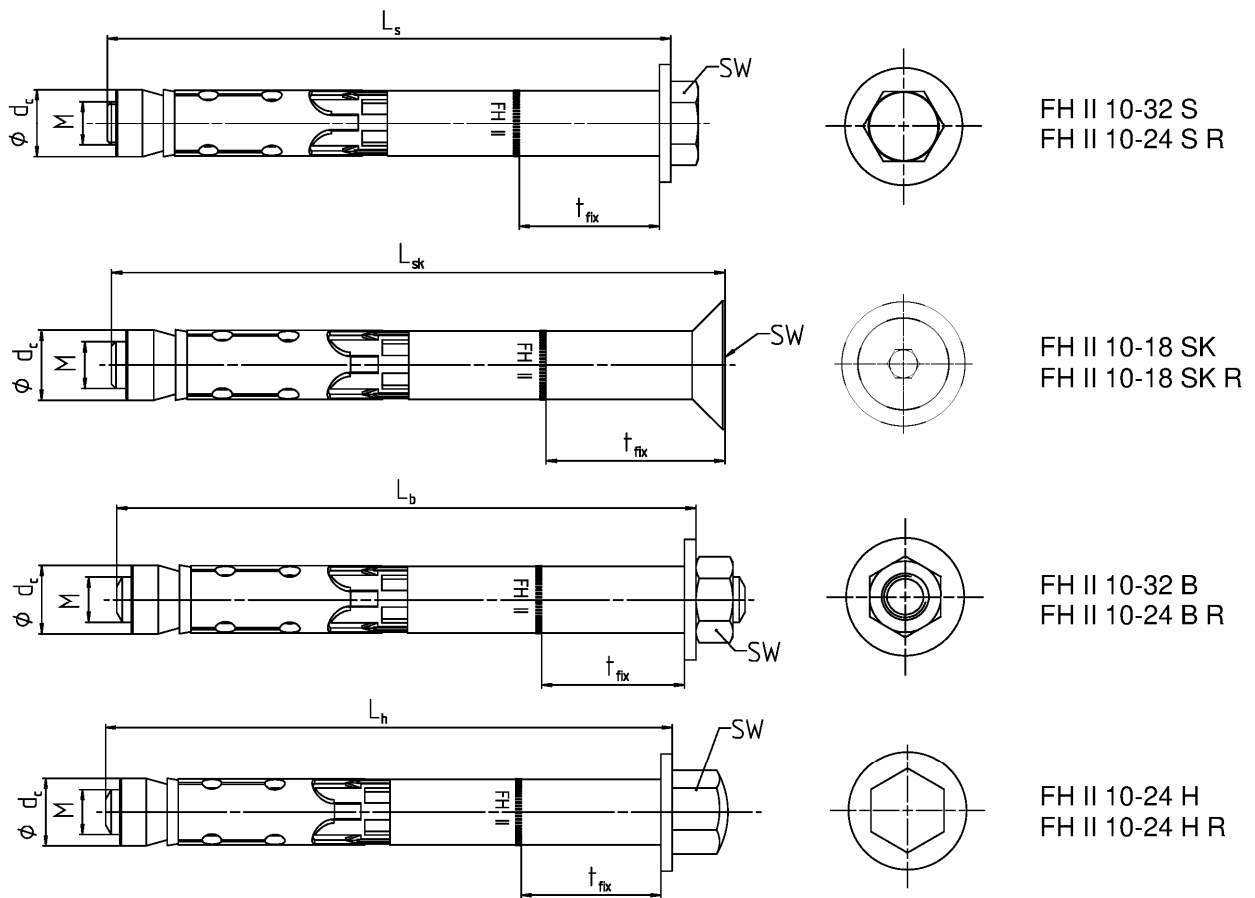


Table A2.1: Dimensions [mm] FH II and FH II R

Anchor type			FH II 10	FH II 12	FH II 15	FH II 18	FH II 24	FH II 28	FH II 32
Thread M			6	8	10	12	16	20	24
Diameter cone nut d _c			10	12	14,8	17,8	23,7	27,5	31,5
Wrench size SW	FH II-S, -B		10	13	17	19	24	30	36
	FH II-SK ¹⁾		4	5	6	8	3)		
	FH II-H		13	17	17	19	24	3)	
	FH II-S R, -B R, -H R		10	13	17	19	24	3)	
	FH II-SK R ¹⁾		4	5	6	8	3)		
t _{fix} FH II-S, -B, -H + FH II-S R, -B R, -H R min			0	0	0	0	0	0	0
t _{fix} FH II-SK + FH II-SK R ²⁾ min			5	6	6	8	3)		
Length of screw / bolt L _s , L _h , L _b (- t _{fix}) ≥			49	74	89	99	124	149	174
Length of countersunk screw L _{sk} (- t _{fix}) ≥			54	79	95	107	3)		

¹⁾ Internal hexagon

²⁾ The influence of the thickness of fixture to the characteristic resistance for shear loads, steel failure without lever arm is taken into account, see tables C3.1, C8.1 and C9.1

³⁾ Anchor type not part of assessment

(Fig. not to scale)

fischer High-Performance Anchor FH II, FH II-I

Product description

Anchor types and dimensions FH II, FH II R

Annex A 2

Appendix 3/ 22

Table A3.1: Material FH II and FH II R

		Material	
No.	Designation	FH II	FH II R
	Steel grade	Steel	Stainless steel R
		Zinc plated $\geq 5\text{ }\mu\text{m}$, ISO 4042:2018	Acc. to EN 10088:2014
1	Hexagon screw	Steel class 8.8; EN ISO 898-1:2013	Class 80 EN ISO 3506:2020
2	Countersunk screw		
3	Cap nut	Steel class 8	
4	Hexagon nut		
5	Threaded rod	Steel $f_{uk} \geq 800\text{ N/mm}^2$; $f_{yk} \geq 640\text{ N/mm}^2$	Stainless steel EN 10088:2014 $f_{uk} \geq 800\text{ N/mm}^2$; $f_{yk} \geq 640\text{ N/mm}^2$
6	Cone nut	Steel EN 10277:2018	Stainless steel EN 10088:2014
7	Distance sleeve	Steel EN 10305:2016	
8	Expansion sleeve	Steel EN 10139:2020/ EN 10277:2018	
9	Plastic sleeve	ABS (plastic)	
10	Washer	Steel EN 10139:2020	Stainless steel EN 10088:2014
11	Conical washer	Steel EN 10277:2018	

fischer High-Performance Anchor FH II, FH II-I

Product description
Materials FH II and FH II R

Annex A 3

Appendix 4/ 22

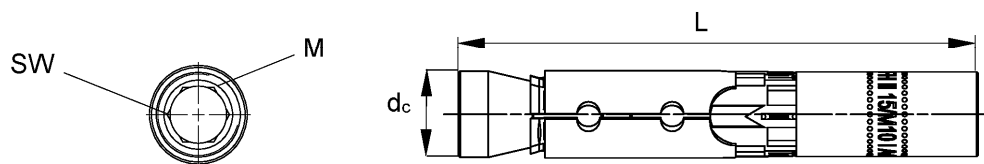


Table A4.1: Anchor Dimensions [mm] FH II-I and FH II-I R

Anchor type FH II-I, FH II-I R		FH II 12/M6 I	FH II 12/M8 I	FH II 15/M10 I	FH II 15/M12 I
Thread	M	6	8	10	12
Diameter cone nut	d _c	12	12	14,8	14,8
Wrench size internal hexagon	SW	6	8	6	8
Anchor length	L	77,5	77,5	90	90

Table A4.2: Material FH II-I and FH II-I R

No.	Designation	Material	
		FH II-I	FH II-I R
	Steel grade	Steel	Stainless steel R
		Zinc plated $\geq 5\text{ }\mu\text{m}$, ISO 4042:2018	Acc. to EN 10088:2014
6	Cone nut	Steel EN 10277:2018	Stainless steel EN 10088:2014
8	Expansion sleeve	Steel EN 10139:2020 / EN 10277:2018	
9	Plastic sleeve	ABS (plastic)	
12	Internal thread bolt	Steel EN 10277:2018 $f_{uk} \geq 750\text{ N/mm}^2$, $f_{yk} \geq 600\text{ N/mm}^2$	Stainless steel EN 10088:2014 $f_{uk} \geq 750\text{ N/mm}^2$, $f_{yk} \geq 600\text{ N/mm}^2$
Requirements for fixing elements		Steel strength class 5.8, 6.8 or 8.8 EN ISO 898-1:2013	Steel strength class A50, A70 or A80 EN ISO 3506:2010 1.4362, 1.4401, 1.4404, 1.4571, 1.4529

(Fig. not to scale)

fischer High-Performance Anchor FH II, FH II-I

Product description

Anchor types, dimensions and materials FH II-I, FH II I-R

Annex A 4

Specifications of intended use

Anchorage subject to:

Size		10	12	15	18	24	28	32
High Performance Anchor	FH II-S, -B	✓						
	FH II-H, -S R, -B R, -H R	✓						1)
	FH II-SK, FH II-SK R	✓					1)	
High Performance Anchor FH II-I, FH II-I R		1)	✓		1)			
Hammer drilling with standard drill bit		✓						
Hammer drilling with hollow drill bit with automatic cleaning								
Static and quasi-static loads		✓						
Cracked and uncracked concrete								
Fire exposure								
Seismic performance category	C1 FH II	2)	✓					
	C1 FH II R		✓					1)
	C2 FH II		✓					
	C2 FH II R		✓					1)
	C1 FH II-I, FH II-I R	1)	2)		1)			
	C2 FH II-I, FH II-I R							

1) Anchor type not part of the assessment

2) No performance assessed

Base materials:

- Compacted reinforced or unreinforced normal weight concrete without fibres (cracked and uncracked) of strength classes C20/25 to C50/60 according to EN 206:2013+A1:2016

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (FH II, FH II R, FH II-I, FH II-I R)
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal conditions, if no particular aggressive conditions exist (FH II R, FH II-I R)

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where deicing materials are used)

Design:


- Anchorages are to be designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.)
- Design of fastenings according to EN 1992-4:2018 and EOTA Technical Report TR 055, Edition February 2018

fischer High-Performance Anchor FH II, FH II-I

Intended use
Specifications

Annex B 1

Appendix 6/ 22

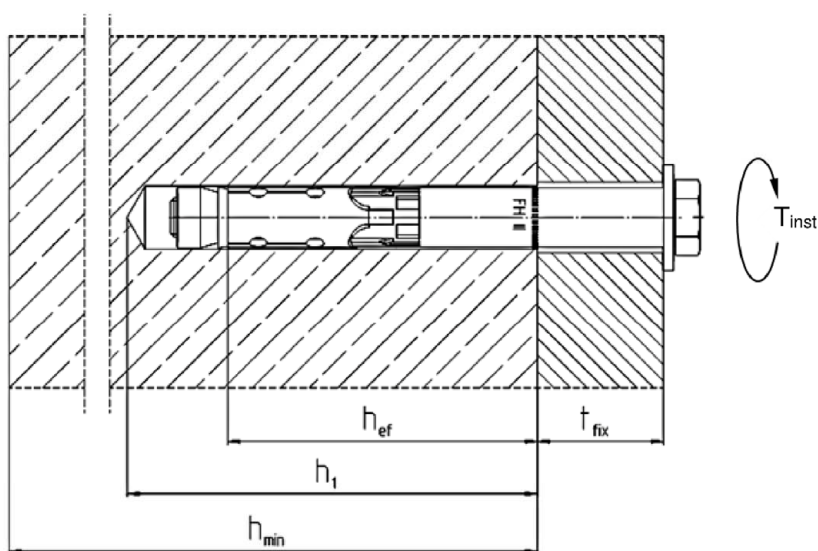

h_{ef} = Effective embedment depth
 t_{fix} = Thickness of the fixture
 h_1 = Depth of drill hole to deepest point
 h_{min} = Minimum thickness of concrete member
 T_{inst} = Required setting torque

Table B2.1: Installation parameters FH II and FH II R

Anchor type FH II S, -SK, -B, -H and FH II S R, -SK R, -B R, -H R		FH II 10	FH II 12	FH II 15	FH II 18	FH II 24	FH II 28	FH II 32
Nominal drill hole diameter d_0		10	12	15	18	24	28	32
Maximum diameter of drill bit $d_{cut} \leq$		10,45	12,50	15,50	18,50	24,55	28,55	32,70
Depth of drill hole to deepest $h_1 \geq$		55	80	90	105	125	155	180
Diameter of clearance hole $d_f \leq$		12	14	17	20	26	31	35
Diameter of counter sunk FH II SK		18	22	25	32	1)		
Depth of counter sunk, 90° FH II SK R		5,0	5,8	5,8	8,0			
Required setting torque	FH II S	10	22,5	40	80	160	180	200
	FH II B		17,5	38		120	180	200
	FH II H		22,5	40		90	1)	
	FH II SK					1)		
	FH II S R, FH II B R	15	25	40	100	160	1)	
	FH II H R	10				1)		
	FH II SK R							

1) Anchor type not part of assessment

(Fig. not to scale)


fischer High-Performance Anchor FH II, FH II-I

Intended use

Installation parameters FH II, FH II R

Annex B 2

Appendix 7/ 22

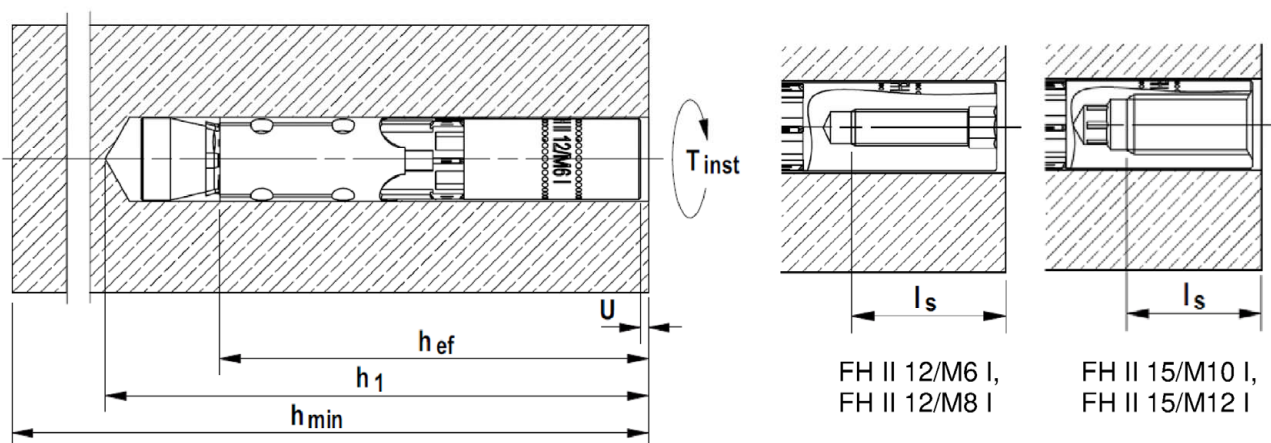

- h_{ef} = Effective embedment depth
 h_1 = Depth of drill hole to deepest point
 h_{min} = Minimum thickness of concrete member
 T_{inst} = Required setting torque
 U = Required gap after torquing
 l_s = Screw-in depth

Table B3.1: Installation parameters FH II-I and FH II-I R

Anchor type FH II-I and FH II-I R		FH II 12/M6 I	FH II 12/M8 I	FH II 15/M10 I	FH II 15/M12 I
Nominal drill hole diameter	d_0	12		15	
Maximum bit diameter	$d_{cut} \leq$	12,50		15,50	
Depth of drill hole	$h_1 \geq$ [mm]	85		95	
Diameter of clearance hole	$d_f \leq$	7	9	12	14
Required gap after torquing ¹⁾	U	3 - 5			
Required setting torque ¹⁾	T_{inst} [Nm]	15		25	
Minimum screw-in depth	$l_s \geq$	$11 + U$	$13 + U$	$10 + U$	$12 + U$
Maximum screw-in depth	$l_s \leq$ [mm]	$20 + U$			
Maximum torque on fixture in combination with screws and threaded rods strength class ≥ 5.8 resp. $\geq A50$	$\max T_{fix}$ [Nm]	3	8	15	20

¹⁾ At least one of the requirements concerning the gap U or the required setting torque T_{inst} have to be fulfilled

(Fig. not to scale)

fischer High-Performance Anchor FH II, FH II-I

Intended use

Installation parameters FH II-I, FH II-I R

Annex B 3

Appendix 8/ 22

Installation instructions:

- Fastener installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Use of the fastener only as supplied by the manufacturer without exchanging the components of the fastener
- Checking before placing the fastener to ensure that the strength class of the concrete in which the fastener is to be placed is in the range given and is not lower than that of the concrete to which the characteristic loads apply
- Check of concrete being well compacted, e.g. without significant voids
- Hammer or hollow drilling according to Annex B5 and B6
- Drill hole created perpendicular $\pm 5^\circ$ to concrete surface, positioning without damaging the reinforcement
- In case of aborted hole: new drilling at a minimum distance twice the depth of the aborted drill hole or smaller distance if the aborted drill hole is filled with high strength mortar and if under shear or oblique tension load it is not in the direction of load application

fischer High-Performance Anchor FH II, FH II-I


Intended Use
Installation instructions

Annex B 4

Appendix 9/ 22


Installation instruction for the fischer High-Performance anchor **FH II 10 - FH II 32 and FH II 10 R - FH II 24 R**

Hollow
drilling




Continue with step 3, 4 and 5


Hammer
drilling

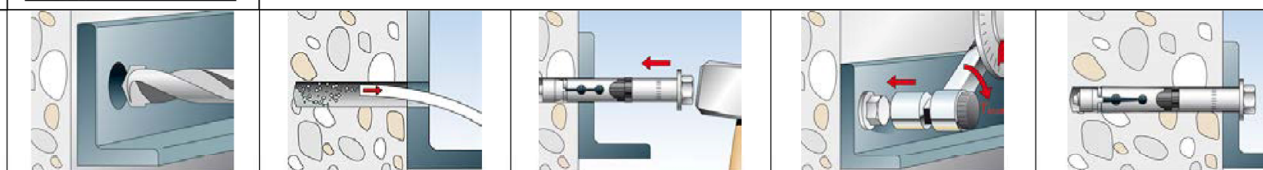


Installation instruction FH II 10 - 32 S and FH II 10 - 24 S R

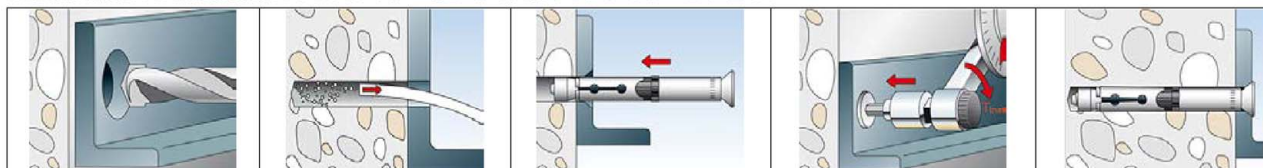

Installation instruction FH II 10 - 18 SK and FH II 10 - 18 SK R

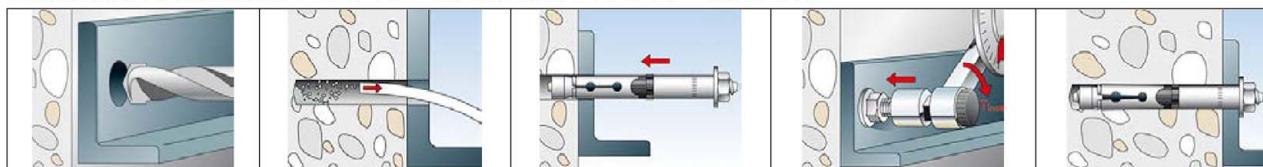

Installation instruction FH II 10 - 32 B and FH II 10 - 24 B R

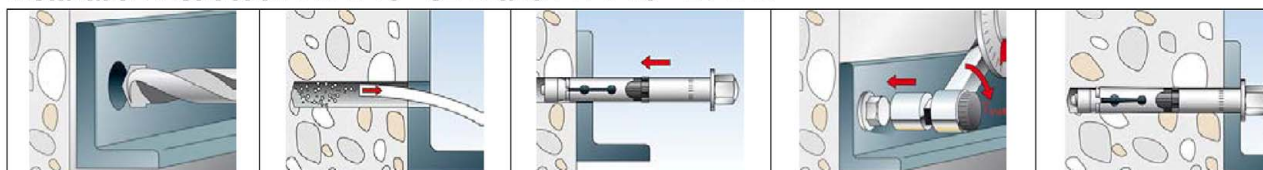

Installation instruction FH II 10 - 24 H and FH II 10 - 24 H R

Step	1	2	3	4	5
Step	Description				
1	Create drill hole with hammer drill		Create drill hole with hollow drill and vacuum cleaner		
2	Clean the hole		-		
3	Set the fastener				
4	Apply T_{inst}				
5	Installed fastener				

Types of drill bits

Hammer drill



Hollow drill



fischer High-Performance Anchor FH II, FH II-I






Intended use

Installation instructions FH II, FH II R

Annex B 5

Appendix 10/ 22

Installation instruction for the fischer High-Performance anchor internal thread **FH II-I and FH II-I R**

Hollow drilling		Continue with step 2, 3, and 4			
Hammer drilling					
Step	1	2	3		4

Step	Description	
1	Create drill hole with hammer drill, clean drill hole	Create drill hole with hollow drill and vacuum cleaner
2	Hammering in the anchor flushed with the surface of the concrete	
3	Tighten the anchor. The included hexagon bit in the package should be used. Other tightening methods are allowed. Tighten the anchor in the concrete until the gap U is 3 - 5 mm or the required setting torque T_{inst} is reached. Only one of the above requirements has to be fulfilled.	
4	Attach the fixture and use a suitable screw or anchor rod. The length of the screw or anchor rod should be determined depending on the thickness of fixture t_{fix} , admissible tolerances, and available thread length $l_{s,max}$ and $l_{s,min}$ including the gap U. Tighten the screw with the torque $\leq \max T_{fix}$ ($\max T_{fix}$ see table B3.1)	

Types of drill bits	
Hammer drill	
Hollow drill	

fischer High-Performance Anchor FH II, FH II-I

Intended use

Installation instructions FH II-I, FH II-I R

Annex B 6

Appendix 11/ 22

Table C1.1: Performance characteristics of tension resistance under static and quasi-static loads for FH II and FH II R

Anchor type FH II-S, -SK, -B, -H and FH II-S R, -SK R, -B R, -H R			FH II 10	FH II 12	FH II 15	FH II 18	FH II 24	FH II 28	FH II 32
Steel failure									
FH II-S, -B,			16,1	29,3	46,4	67,4	125,3	195,8	282,0
FH II-H, FH II-H R, -B R		N _{Rk,s} [kN]	16,1	29,3	46,4	67,4	125,3	2)	
FH II-SK			16,1	29,3	46,4	67,4	2)		
Partial factor		γ _{Ms} ¹⁾ [-]	1,5						
FH II-S R		N _{Rk,s} [kN]	16,1	29,3	46,4	67,4	125,3	2)	
FH II-SK R			16,1	29,3	46,4	67,4	2)		
Partial factor		γ _{Ms} ¹⁾ [-]	1,6						
Pullout failure									
Characteristic resistance in cracked concrete C20/25 FH II and FH II R			7,5	12,0	16,0	25,0	34,4	48,1	63,3
Characteristic resistance in uncracked concrete C20/25 FH II		N _{Rk,p} [kN]	12,5	22,9	28,8	35,2	49,2	68,8	90,4
Characteristic resistance in uncracked concrete C20/25 FH II R			12,5	20,0	28,8	35,2	49,2	2)	
Increasing factors for N _{Rk,p} for cracked and uncracked concrete		ψ _c	C25/30	1,12					
			C30/37	1,22					
			C35/45	1,32					
			C40/50	1,41					
			C45/55	1,50					
			C50/60	1,58					
Installation factor		γ _{inst} [-]	1,0						
Concrete cone failure and splitting failure									
Effective embedment depth		h _{ef} [mm]	40	60	70	80	100	125	150
Factor for cracked concrete		k _{cr,N} [-]	7,7 ³⁾						
Factor for uncracked concrete			11,0 ³⁾						
Spacing		s _{cr,N}	120	180	210	240	300	375	450
Edge distance		c _{cr,N} [mm]	60	90	105	120	150	187,5	225
Spacing (splitting)		s _{cr,sp}	190	300	320	340	380	480	570
Edge distance (splitting)		c _{cr,sp}	95	150	160	170	190	240	285
Characteristic resistance (splitting)		N ⁰ _{Rk,sp} [kN]	min {N ⁰ _{Rk,c} , N _{Rk,p} } ⁴⁾						

¹⁾ In absence of other national regulations

²⁾ Anchor type no performance assessed

³⁾ Based on concrete strength as cylinder strength

⁴⁾ $N^0_{Rk,c}$ acc. EN 1992-4:2018

fischer High-Performance Anchor FH II, FH II-I

Performances

Performance characteristics of tension resistance for FH II and FH II R

Annex C 1

Appendix 12/ 22

Table C2.1: Performance characteristics of **tension resistance** under static and quasi-static loads
for FH II-I and FH II-I R

Anchor type FH II-I and FH II-I R			FH II 12/M6 I	FH II 12/M8 I	FH II 15/M10 I	FH II 15/M12 I
Steel failure						
Anchor in combination with screw / threaded rod of galvanised steel complying with DIN EN ISO 898						
Strength class 5.8	N _{Rk,s} [kN]		10	19	29	43
Strength class 6.8			12	23	35	44
Strength class 8.8			16	27	44	44
Partial factor	γ _{Ms} ¹⁾	[-]	1,5			
Anchor in combination with screw / threaded rod of stainless steel complying with DIN EN ISO 3506						
Screw/thread strength class A50	N _{Rk,s} [kN]		10	19	29	43
Partial factor	γ _{Ms} ¹⁾	[-]	2,86			
Screw/thread strength class A70	N _{Rk,s} [kN]		14	26	41	54
Partial factor	γ _{Ms} ¹⁾	[-]	1,87			
Screw/thread strength class A80	N _{Rk,s} [kN]		16	29	46	46
Partial factor	γ _{Ms} ¹⁾	[-]	1,60			
Pullout failure						
Characteristic resistance in cracked concrete C20/25	N _{Rk,p} [kN]		9,0		12,0	
Characteristic resistance in uncracked concrete C20/25			20,0		28,8	
Increasing factors for N _{Rk,p} for cracked and uncracked concrete	ψ _c	C25/30	1,12			
		C30/37	1,22			
		C35/45	1,32			
		C40/50	1,41			
		C45/55	1,50			
		C50/60	1,58			
Installation factor	γ _{inst}	[-]	1,0			
Concrete cone failure and splitting failure						
Effective embedment depth	h _{ef} [mm]		60		70	
Factor for cracked concrete	k _{cr,N}	[-]	7,7 ²⁾			
Factor for uncracked concrete	k _{ucr,N}		11,0 ²⁾			
Spacing	s _{cr,N}		180		210	
Edge distance	c _{cr,N}	[mm]	90		105	
Spacing (splitting)	s _{cr,sp}		300		320	
Edge distance (splitting)	c _{cr,sp}		150		160	
Characteristic resistance (splitting)	N ⁰ _{Rk,sp} [kN]		min {N ⁰ _{Rk,c} , N _{Rk,p} } ³⁾			
1) In absence of other national regulations 2) Based on concrete strength as cylinder strength 3) N ⁰ _{Rk,c} acc. EN 1992-4:2018						
fischer High-Performance Anchor FH II, FH II-I					Annex C 2 Appendix 13/ 22	
Performances Performance characteristics of tension resistance for FH II-I and FH II-I R						

Table C3.1: Performance characteristics of **shear resistance** for **FH II** and **FH II R** under static and quasi-static loads

Anchor type FH II-S, -SK, -B, -H and FH II-S R, -SK R, -B R, -H R			FH II 10	FH II 12	FH II 15	FH II 18	FH II 24	FH II 28	FH II 32
Installation factor γ_{inst} [-]			1,0						
Steel failure without lever arm									
FH II-S			18,0	33,0	59,0	76,0	146,0	176,4	217,0
FH II-B $V^0_{Rk,s}$ [kN]			16,0	27,2	42,8	61,9	119,0	148,8	169,0
FH II-H			16,0	27,2	42,8	61,9	119,0	3)	
FH II-SK	$t_{fix}^{2)}$ [mm]	≥ 10		≥ 15		3)			
	$V^0_{Rk,s}$ [kN]	18,0	33,0	59,0	76,0				
	$t_{fix}^{2)}$ [mm]	< 10		< 15					
	$V^0_{Rk,s}$ [kN]	8,0	14,0	23,0	34,0				
Partial factor $\gamma_{Ms}^{1)}$ [-]			1,25						
Factor for ductility k_7			1,0						
FH II-S R $V^0_{Rk,s}$ [kN]			18,0	33,0	59,0	76,0	146,0	3)	
Partial factor $\gamma_{Ms}^{1)}$ [-]			1,33						
FH II-B R, -H R $V^0_{Rk,s}$ [kN]			16,0	27,2	42,8	61,9	119,0	3)	
Partial factor $\gamma_{Ms}^{1)}$ [-]			1,25						
FH II-SK R	$t_{fix}^{2)}$ [mm]	≥ 10		≥ 15		3)			
	$V^0_{Rk,s}$ [kN]	18,0	33,0	59,0	76,0				
	$t_{fix}^{2)}$ [mm]	< 10		< 15					
	$V^0_{Rk,s}$ [kN]	8,0	14,0	23,0	34,0				
Partial factor $\gamma_{Ms}^{1)}$ [-]			1,33						
Factor for ductility k_7			1,0						
Steel failure with lever arm and concrete pryout failure									
Characteristic bending resistance FH II-S, -SK, -B, -H $M^0_{Rk,s}$ [Nm]			12	30	60	105	266	518	896
Partial factor $\gamma_{Ms}^{1)}$ [-]			1,25						
Characteristic bending resistance FH II R $M^0_{Rk,s}$ [Nm]			12	30	60	105	266	3)	
Partial factor $\frac{FH\ II-B\ R,\ -H\ R}{FH\ II-S\ R,\ -SK\ R}$ $\gamma_{Ms}^{1)}$ [-]	1,25								
	1,33								
Factor for pryout failure k_8 [-]			1,0	2,0					
Concrete edge failure									
Effective embedment depth for calculation $l_f =$ [mm]			h_{ef}						
Outside diameter of a fastener d_{nom}			10	12	15	18	24	28	32
¹⁾ In absence of other national regulations ²⁾ The thickness of the fixture has influence to the characteristic resistance for shear loads, steel failure without lever arm ³⁾ No performance assessed									
fischer High-Performance Anchor FH II, FH II-I							Annex C 3 Appendix 14/ 22		
Performances Performance characteristics of shear resistance for FH II and FH II R									

Table C4.1: Performance characteristics of **shear resistance** for **FH II-I and FH II-I R** under static and quasi-static loads

Anchor type FH II-I and FH II-I R		FH II 12/M6 I	FH II 12/M8 I	FH II 15/M10 I	FH II 15/M12 I
Installation factor γ_{inst} [-]		1,0			
Steel failure without lever arm					
Anchor in combination with screw / threaded rod of galvanised steel complying with DIN EN ISO 898:2013					
Strength class 5.8	$V^0_{Rk,s}$ [kN]	5	9	15	21
Strength class 6.8		6	11	18	24
Strength class 8.8		8	14	23	24
Partial factor $\gamma_{Ms}^{1)}$ [-]		1,25			
Factor for ductility k_7		1,0			
Anchor in combination with screw / threaded rod of stainless steel complying with DIN EN ISO 3506:2010					
Strength class A50	$V^0_{Rk,s}$ [kN]	5	9	15	21
Partial factor $\gamma_{Ms}^{1)}$ [-]		2,38			
Strength class A70	$V^0_{Rk,s}$ [kN]	7	13	20	30
Partial factor $\gamma_{Ms}^{1)}$ [-]		1,56			
Strength class A80	$V^0_{Rk,s}$ [kN]	8	15	23	32
Partial factor $\gamma_{Ms}^{1)}$ [-]		1,33			
Factor for ductility k_7		1,0			
Steel failure with lever arm and concrete pryout failure					
Anchor in combination with screw / threaded rod of galvanised steel complying with DIN EN ISO 898:2013					
Strength class 5.8	$M^0_{Rk,s}$ [Nm]	8	19	37	65
Strength class 6.8		9	23	44	78
Strength class 8.8		12	30	60	105
Partial factor $\gamma_{Ms}^{1)}$ [-]		1,25			
Factor for ductility k_7		1,0			
Anchor in combination with screw / threaded rod of stainless steel complying with DIN EN ISO 3506:2010					
Strength class A50	$M^0_{Rk,s}$ [Nm]	8	19	37	65
P Partial factor $\gamma_{Ms}^{1)}$ [-]		2,38			
Strength class A70	$M^0_{Rk,s}$ [Nm]	11	26	52	92
Partial factor $\gamma_{Ms}^{1)}$ [-]		1,56			
Strength class A80	$M^0_{Rk,s}$ [Nm]	12	30	60	105
Partial factor $\gamma_{Ms}^{1)}$ [-]		1,33			
Factor for ductility k_7		1,0			
Factor for pryout failure k_8		2,0			
Concrete edge failure					
Effective embedment depth for calculation $l_f =$ [mm]		h_{ef}			
Outside diameter of fastener d_{nom}		12		15	

¹⁾ In absence of other national regulations

fischer High-Performance Anchor FH II, FH II-I

Performances

Performance characteristics of shear resistance for FH II-I and FH II-I R

Annex C 4

Appendix 15/ 22

Table C5.1: Performance characteristics of tension resistance under fire exposure

Anchor type		R30			R60		
		N _{Rk,s,fi,30} [kN]	N _{Rk,p,fi,30} [kN]	N ⁰ _{Rk,c,fi,30} [kN]	N _{Rk,s,fi,60} [kN]	N _{Rk,p,fi,60} [kN]	N ⁰ _{Rk,c,fi,60} [kN]
FH II 10, FH II 10 R		0,2	1,8	1,8	0,2	1,8	1,8
FH II 12, FH II 12 R		2,0	3,0	5,0	1,3	3,0	5,0
FH II 15, FH II 15 R		3,2	4,0	7,4	2,3	4,0	7,4
FH II 18, FH II 18 R		4,8	6,3	10,3	3,9	6,3	10,3
FH II 24, FH II 24 R		8,9	9,0	18,0	7,3	9,0	18,0
FH II 28		13,9	12,6	31,4	11,3	12,6	31,4
FH II 32		20,0	16,5	49,6	16,3	16,5	49,6
FH II 12/M6-I,	5.8, A50 ¹⁾	0,1	2,3	5,0	0,1	2,3	5,0
FH II 12/M6-I R	8.8, A70, A80 ^{1) 2)}	0,2			0,2		
FH II 12/M8-I,	5.8, A50 ¹⁾	1,3			0,8		
FH II 12/M8-I R	8.8, A70, A80 ^{1) 2)}	2,0			1,3		
FH II 15/M10-I,	5.8, A50 ¹⁾	2,0	3,0	7,4	1,4	3,0	7,4
FH II 15/M10-I R	8.8, A70, A80 ^{1) 2)}	3,2			2,3		
FH II 15/M12-I,	5.8/A50 ¹⁾	3,0			2,4		
FH II 15/M12-I R	8.8, A70, A80 ^{1) 2)}	4,8			3,9		
Anchor type		R90			R120		
		N _{Rk,s,fi,90} [kN]	N _{Rk,p,fi,90} [kN]	N ⁰ _{Rk,c,fi,90} [kN]	N _{Rk,s,fi,120} [kN]	N _{Rk,p,fi,120} [kN]	N ⁰ _{Rk,c,fi,120} [kN]
FH II 10, FH II 10 R		0,1	1,8	1,8	0,1	1,5	1,5
FH II 12, FH II 12 R		0,6	3,0	5,0	0,2	2,4	4,0
FH II 15, FH II 15 R		1,4	4,0	7,4	1,0	3,2	5,9
FH II 18, FH II 18 R		3,0	6,3	10,3	2,6	5,0	8,2
FH II 24, FH II 24 R		5,6	9,0	18,0	4,8	7,2	14,4
FH II 28		8,8	12,6	31,4	7,5	10,1	25,2
FH II 32		12,6	16,5	49,6	10,8	13,2	39,7
FH II 12/M6-I,	5.8, A50 ¹⁾	0,1	2,3	5,0	0,1	1,8	4,0
FH II 12/M6-I R	8.8, A70, A80 ^{1) 2)}	0,1			0,1		
FH II 12/M8-I,	5.8, A50 ¹⁾	0,4			0,1		
FH II 12/M8-I R	8.8, A70, A80 ^{1) 2)}	0,6			0,2		
FH II 15/M10-I,	5.8, A50 ¹⁾	0,9	3,0	7,4	0,6	2,4	5,9
FH II 15/M10-I R	8.8, A70, A80 ^{1) 2)}	1,4			1,0		
FH II 15/M12-I,	5.8/A50 ¹⁾	1,9			1,6		
FH II 15/M12-I R	8.8, A70, A80 ^{1) 2)}	3,0			2,6		

¹⁾ Intermediate values by linear interpolation

²⁾ In combination with screw / threaded rod strength class 8.8, A70, A80

fischer High-Performance Anchor FH II, FH II-I

Performances

Performance characteristics of tension resistance under fire exposure

Annex C 5

Appendix 16/ 22

Table C6.1: Performance characteristics of **shear resistance** under **fire exposure**

Anchor type	R30		R60	
	$V_{Rk,s,fi,30}$ [kN]	$M^0_{Rk,s,fi,30}$ [Nm]	$V_{Rk,s,fi,60}$ [kN]	$M^0_{Rk,s,fi,60}$ [Nm]
FH II 10, FH II 10 R	0,3	0	0,3	0
FH II 12, FH II 12 R	2,0	2	1,3	1
FH II 15, FH II 15 R	3,2	4	2,3	3
FH II 18, FH II 18 R	4,8	7	3,9	6
FH II 24, FH II 24 R	8,9	19	7,3	15
FH II 28	13,9	37	11,3	30
FH II 32	20,0	64	16,3	52
FH II 12/M6 I, 5.8, A50 ¹⁾	0,2	0	0,2	0
FH II 12/M6 I R 8.8, A70, A80 ^{1) 2)}	0,3	0	0,3	0
FH II 12/M8 I, 5.8, A50 ¹⁾	1,3	1	0,8	1
FH II 12/M8-I R 8.8, A70, A80 ^{1) 2)}	2,0	2	1,3	1
FH II 15/M10 I, 5.8, A50 ¹⁾	2,0	3	1,4	2
FH II 15/M10-I R 8.8, A70, A80 ^{1) 2)}	3,2	4	2,3	3
FH II 15/M12-I, 5.8/A50 ¹⁾	3,0	4	2,4	4
FH II 15/M12-I R 8.8, A70, A80 ^{1) 2)}	4,8	7	3,9	6
Anchor type	R90		R120	
	$V_{Rk,s,fi,90}$ [kN]	$M^0_{Rk,s,fi,90}$ [Nm]	$V_{Rk,s,fi,120}$ [kN]	$M^0_{Rk,s,fi,120}$ [Nm]
FH II 10, FH II 10 R	0,2	0	0,1	0
FH II 12, FH II 12 R	0,6	1	0,2	0
FH II 15, FH II 15 R	1,4	2	1,0	1
FH II 18, FH II 18 R	3,0	5	2,6	4
FH II 24, FH II 24 R	5,6	12	4,8	10
FH II 28	8,8	23	7,5	20
FH II 32	12,6	40	10,8	34
FH II 12/M6-I, 5.8, A50 ¹⁾	0,1	0	0,1	0
FH II 12/M6-I R 8.8, A70, A80 ^{1) 2)}	0,2	0	0,1	0
FH II 12/M8-I, 5.8, A50 ¹⁾	0,4	1	0,1	0
FH II 12/M8-I R 8.8, A70, A80 ^{1) 2)}	0,6	1	0,2	0
FH II 15/M10 I, 5.8, A50 ¹⁾	0,9	2	0,6	1
FH II 15/M10-I R 8.8, A70, A80 ^{1) 2)}	1,4	3	1,0	1
FH II 15/M12 I, 5.8/A50 ¹⁾	1,9	4	1,6	3
FH II 15/M12-I R 8.8, A70, A80 ^{1) 2)}	3,0	6	2,6	4

¹⁾ Intermediate values by linear interpolation²⁾ In combination with screw / threaded rod strength class 8.8, A70, A80**Table C6.2:** Minimum spacings and minimum edge distances of anchors under **fire exposure** for tension and shear loads

Anchor type	FH II 10	FH II 12 FH II 12-I	FH II 15 FH II 15-I	FH II 18	FH II 24	FH II 28	FH II 32
Spacing $\frac{S_{cr,N,fi}}{S_{min,fi}}$	$4x h_{ef}$						
	40	50	60	70	80	100	120
Edge distance $\frac{C_{cr,N,fi}}{C_{min,fi}}$ [mm]	$2 \times h_{ef}$						
	$C_{min,fi} = 2 \times h_{ef}$, for fire exposure from more than one side $C_{min,fi} \geq 300$ mm						

fischer High-Performance Anchor FH II, FH II-I

Performances

Performance characteristics of shear resistance under fire exposure

Minimum spacings and minimum edge distances of anchors under fire exposure

Annex C 6

Appendix 17/ 22

Table C7.1: Minimum thickness of concrete member, minimum spacing and minimum edge distances
FH II, FH II R

Anchor type FH II-S, -SK, -B, -H and FH II-S R, -SK R, -B R, -H R		FH II 10	FH II 12	FH II 15	FH II 18	FH II 24	FH II 28	FH II 32
Minimum thickness of concrete member	h_{min} [mm]	80	120	140	160	200	250	300
Minimum spacing, cracked concrete	s_{min}	40	50	60	70	80	100	120
	for $c \geq$ [mm]	40	80	120	140	180	200	260
Minimum edge distance, cracked concrete	c_{min}	40	50	60	70	80	100	120
	for $s \geq$ [mm]	40	80	120	160	200	220	280
Minimum spacing, uncracked concrete	s_{min}	40	60	70	80	100	120	160
	for $c \geq$ [mm]	70	100	100	160	200	220	360
Minimum edge distance, uncracked concrete	c_{min}	40	60	70	80	100	120	180
	for $s \geq$ [mm]	70	100	140	200	220	240	380

Intermediate values may be calculated by linear interpolation

Table C7.2: Minimum thickness of concrete member, minimum spacing and minimum edge distances
FH II-I, FH II-I R

Anchor type FH II-I and FH II-I R		FH II 12/M6 I FH II 12/M8 I	FH II 15/M10 I FH II 15/M12 I
Minimum thickness of concrete member	h_{min} [mm]	125	150
Minimum spacing, cracked concrete	s_{min}	50	60
	for $c \geq$ [mm]	80	120
Minimum edge distance, cracked concrete	c_{min}	50	60
	for $s \geq$ [mm]	80	120
Minimum spacing, uncracked concrete	s_{min}	60	70
	for $c \geq$ [mm]	100	100
Minimum edge distance, uncracked concrete	c_{min}	60	70
	for $s \geq$ [mm]	100	140

Intermediate values may be calculated by linear interpolation.

fischer High-Performance Anchor FH II, FH II-I

Performances

Minimum thickness of concrete member, minimum spacing and minimum edge distances

Annex C 7

Table C8.1: Performance characteristics of **tension and shear resistance** for **seismic performance category C1** for FH II-S, -SK, -B, -H and FH II-S R, -SK R, -B R, -H R

Anchor type FH II-S, -SK, -B, -H and FH II-S R, -SK R, -B R, -H R				FH II 12	FH II 15	FH II 18	FH II 24	FH II 28	FH II 32
Steel failure									
Characteristic resistance of tension load C1	FH II-S, -B	N _{Rk,s,C1} [kN]		29,3	46,4	67,4	125,3	195,8	282,0
	FH II-H, -H R, -B R			29,3	46,4	67,4	125,3	3)	
	FH II-SK			29,3	46,4	67,4	3)		
	Partial factor	γ _{Ms,C1} ¹⁾ [-]	1,5						
	FH II-S R	N _{Rk,s,C1} [kN]	29,3	46,4	67,4	125,3	3)		
	FH II-SK R		29,3	46,4	67,4	3)			
	Partial factor	γ _{Ms,C1} ¹⁾ [-]	1,6						
Pullout failure									
Characteristic resistance of tension load in cracked concrete C1		N _{Rk,p,C1} [kN]	12,0	16,0	25,0	36,0	50,3	66,1	
		γ _{Mp,C1} ¹⁾ [-]	1,5						
Steel failure without lever arm									
Characteristic resistance of shear load C1									
FH II-S		V _{Rk,s,C1} [kN]		25,0	41,0	60,0	123,0	141,0	200,0
FH II-B				17,0	30,0	46,0	103,0	117,0	169,0
FH II-H				17,0	30,0	46,0	103,0		
FH II-SK	t _{fix} ²⁾ [mm]		≥ 10	≥ 15		3)			
	V _{Rk,s,C} [kN]	25,0	41,0	60,0					
	t _{fix} ²⁾ [mm]	< 10	< 15						
	V _{Rk,s,C} [kN]	11,0	16,0	27,0					
Partial factor		γ _{Ms,C1} ¹⁾ [-]	1,25						
FH II-S R		V _{Rk,s,C1} [kN]	25,0	41,0	60,0	123,0	-		
Partial factor		γ _{Ms,C1} ¹⁾ [-]	1,33						
FH II-B R, -H R		V _{Rk,s,C1} [kN]	17,0	30,0	46,0	103,0	-		
Partial factor		γ _{Ms,C1} ¹⁾ [-]	1,25						
FH II-SK R	t _{fix} ²⁾ [mm]		≥ 10	≥ 15		3)			
	V _{Rk,s,C1} [kN]	25,0	41,0	60,0					
	t _{fix} ²⁾ [mm]	< 10	< 15						
	V _{Rk,s,C1} [kN]	11,0	16,0	27,0					
Partial factor		γ _{Ms,C1} ¹⁾ [-]	1,33						
Factor for annular gap		α _{gap}	0,50						

1) In absence of other national regulations

2) The thickness of the fixture has influence to the characteristic resistance for shear loads, steel failure without lever arm

3) No performance assessed

fischer High-Performance Anchor FH II, FH II-I

Performances

Performance characteristics of tension and shear resistance for seismic performance category C1

Annex C 8

Appendix 19/ 22

Table C9.1: Performance characteristics of **tension and shear resistance** for **seismic performance category C2** for FH II-S, -SK, -B, -H and FH II-S R, -SK R, -B R, -H R

Anchor type FH II-S, -SK, -B, -H and FH II-S R, -SK R, -B R, -H R				FH II 12	FH II 15	FH II 18	FH II 24	FH II 28	FH II 32
Steel failure									
Characteristic resistance of tension load C2	FH II-S, -B	N _{Rk,s,C2}	[kN]	29,3	46,4	67,4	125,3	195,8	
	FH II-H, -H R, -B R			29,3	46,4	67,4	125,3	3)	
	FH II-SK			29,3	46,4	67,4	3)		
	Partial factor	γ _{Ms,C2} ¹⁾	[-]	1,5					
	FH II-S R	N _{Rk,s,C2}	[kN]	29,3	46,4	67,4	125,3	3)	
	FH II-SK R			29,3	46,4	67,4	3)		
	Partial factor	γ _{Ms,C2} ¹⁾	[-]	1,6					
Pullout failure									
Characteristic resistance of tension load in cracked concrete C2		N _{Rk,p,C2}	[kN]	6,2	11,3	21,8	43,0	65,9	
		γ _{Mp,C2} ¹⁾	[-]	1,5					
Steel failure without lever arm									
Characteristic resistance of shear load C2									
FH II-S		V _{Rk,s,C2}	[kN]	14,7	28,9	41,0	100,7		
FH II-B				9,8	20,9	34,1	61,9	67,2	
FH II-H				9,8	20,9	34,1	61,9	3)	
FH II-SK	t _{fix} ²⁾	[mm]	≥ 10	≥ 15		3)			
	V _{Rk,s,C2}	[kN]	14,8	23,3	33,8				
	t _{fix} ²⁾	[mm]	< 10	< 15					
	V _{Rk,s,C2}	[kN]	6,3	9,1	15,1				
Partial factor		γ _{Ms,C2} ¹⁾	[-]	1,25					
FH II-S R		V _{Rk,s,C2}	[kN]	14,7	28,9	41,0	100,7	3)	
Partial factor		γ _{Ms,C2} ¹⁾	[-]	1,33					
FH II-B R, -H R		V _{Rk,s,C2}	[kN]	9,8	20,9	34,1	61,9	3)	
Partial factor		γ _{Ms,C2} ¹⁾	[-]	1,25					
FH II-SK R	t _{fix} ²⁾	[mm]	≥ 10	≥ 15		3)			
	V _{Rk,s,C2}	[kN]	14,8	23,3	33,8				
	t _{fix} ²⁾	[mm]	< 10	< 15					
	V _{Rk,s,C2}	[kN]	6,3	9,1	15,1				
Partial factor		γ _{Ms,C2} ¹⁾	[-]	1,33					
Factor for annular gap		α _{gap}		0,50					

1) In absence of other national regulations

2) The thickness of the fixture has influence to the characteristic resistance for shear loads, steel failure without lever arm

3) No performance assessed

fischer High-Performance Anchor FH II, FH II-I

Performances

Performance characteristics of tension and shear resistance for seismic performance category C2

Annex C 9

Appendix 20/ 22

Table C10.1: Displacements under static and quasi static **tension loads** for FH II and FH II R

Anchor type FH II-S, -SK, -B, -H and FH II-S R, -SK R, -B R, -H R		FH II 10	FH II 12	FH II 15	FH II 18	FH II 24	FH II 28	FH II 32
Tension load cracked concrete	N [kN]	3,6	5,7	7,6	11,9	17,1	24,0	31,5
Corresponding displacements	$\frac{\delta_{N0}}{\delta_{N\infty}}$ [mm]	1,0	1,0	1,0	1,0	1,0	0,7	0,7
		1,7	1,6	1,6	1,6	1,8	1,3	1,1
Tension load uncracked concrete	N [kN]	6,0	11,2	14,1	17,2	24,0	33,6	44,2
Corresponding displacements	$\frac{\delta_{N0}}{\delta_{N\infty}}$ [mm]	0,6	1,0	1,0	1,0	1,0	0,3	0,3
		1,7	1,6	1,6	1,6	1,8	1,3	1,1

Table C10.2: Displacements under static and quasi static **tension loads** for FH II-I and FH II-I R

Anchor type FH II-I and FH II-I R		FH II 12/M6 I FH II 12/M8 I	FH II 15/M10 I FH II 15/M12 I
Tension load cracked concrete	N [kN]	4,3	5,7
Tension load uncracked concrete		9,5	14,1
Corresponding displacements	$\frac{\delta_{N0}}{\delta_{N\infty}}$ [mm]	1,7	1,9
		2,2	2,9

Table C10.3: Displacements under static and quasi static **shear loads** for FH II-S and FH II-SK

Anchor type FH II-S and FH II-SK		FH II 10	FH II 12	FH II 15	FH II 18	FH II 24	FH II 28	FH II 32
Shear load in cracked and uncracked concrete	V [kN]	10,3	18,9	33,7	43,4	83,4	99,4	124,0
Corresponding displacements	$\frac{\delta_{V0}}{\delta_{V\infty}}$ [mm]	2,4	2,7	4,4	5,0	7,0	6,0	8,0
		3,6	4,1	6,6	7,5	10,5	9,0	12,0

Table C10.4: Displacements under static and quasi static **shear loads** for FH II-B and FH II-H

Anchor type FH II-B and FH II-H		FH II 10	FH II 12	FH II 15	FH II 18	FH II 24	FH II 28	FH II 32
Shear load in cracked and uncracked concrete	V [kN]	8,9	15,4	23,4	35,4	68,0	83,4	96,6
Corresponding displacements	$\frac{\delta_{V0}}{\delta_{V\infty}}$ [mm]	2,2	2,3	3,0	5,0	7,0	5,0	5,0
		3,3	3,5	4,5	7,5	10,5	7,5	7,5

fischer High-Performance Anchor FH II, FH II-I

Performances

Displacements under tension and shear loads

Annex C 10

Appendix 21/ 22

Table C11.1: Displacements under static and quasi static **shear loads**
for FH II-S R, FH II-SK R, FH II-B R and FH II-H R

Anchor type FH II-S R, -SK R, -B R, -H R		FH II 10	FH II 12	FH II 15	FH II 18	FH II 24
Shear load in cracked and uncracked concrete	V [kN]	10,3	16,0	24,6	37,7	68,0
Corresponding displacements	$\frac{\delta_{V0}}{\delta_{V\infty}}$ [mm]	3,5	3,5	3,7	5,7	9,0
		5,3	5,3	5,6	8,6	13,5

Table C11.2: Displacements under static and quasi static **shear loads** for FH II-I and FH II-I R

Anchor type: FH II-I and FH II-I R		FH II 12/M6 I	FH II 12/M8 I	FH II 15/M10 I	FH II 15/M12 I
Shear load in cracked and uncracked concrete	V [kN]	4,6	8,3	13,3	13,7
Corresponding displacements	$\frac{\delta_{V0}}{\delta_{V\infty}}$ [mm]	2,6	2,6	2,2	2,2
		3,9	3,9	3,3	3,3

Table C11.3: Displacements under **tension loads** for **seismic performance category C2**
for FH II and FH II R

Anchor type FH II-S, -SK, -B, -H and FH II-S R, -SK R, -B R, -H R		FH II 12	FH II 15	FH II 18	FH II 24	FH II 28	FH II 32
Displacement DLS	$\delta_{N,C2 (DLS)}$ [mm]	1,55	2,63	2,04	4,26	3,06	
Displacement ULS	$\delta_{N,C2 (ULS)}$	8,71	11,07	7,30	11,70	11,44	

Table C11.4: Displacements under **shear loads** for **seismic performance category C2**
for FH II and FH II R

Anchor type FH II-S, -SK and FH II-S R, -SK R		FH II 12	FH II 15	FH II 18	FH II 24	FH II 28	FH II 32
Displacement DLS	$\delta_{V,C2 (DLS)}$ [mm]	3,53	4,18	4,67	5,59	4,79	
Displacement ULS	$\delta_{V,C2 (ULS)}$	6,62	7,38	9,03	14,09	9,95	

Anchor type FH II-B, -H and FH II-B R, -H R		FH II 12	FH II 15	FH II 18	FH II 24	FH II 28	FH II 32
Displacement DLS	$\delta_{V,C2 (DLS)}$ [mm]	3,42	4,26	4,29	4,79		
Displacement ULS	$\delta_{V,C2 (ULS)}$	5,26	6,66	7,95	7,69	9,95	

fischer High-Performance Anchor FH II, FH II-I

Performances

Displacements under tension and shear loads

Annex C 11