

**SUORITUSTASOILMOITUS****DoP 0369**

fischer injection system FIS V Zero (Muuraussessa käytettävät metalliset injektioankkuroitut)

FI

1. Tuotetyypin yksilöllinen tunniste:**DoP 0369**2. Ajottu käyttötarkoitus (aiotut käyttötarkoituksset):**Jälkkäteen tehtäviin kiinnityksiin muuraus, katso lisäys, erityisesti liitteet B1 - B14.**3. Valmistaja:**fischerwerke GmbH & Co. KG, Otto-Hahn-Straße 15, 79211 Denzlingen, Saksa**4. Valtuuttetu edustaja:

-

5. Suoritustason pysyvyyden arvioinnissa ja varmentamisessa käytetty järjestelmä/käytetty järjestelmät:

1

6. Eurooppalainen arvointiasiakirja:**EAD 330076-01-0604, Edition 10/2022****ETA-21/0267; 2024-11-14**

Eurooppalainen tekninen arvointi:

DIBt- Deutsches Institut für Bautechnik

Teknisestä arvioinnista vastaava laitos:

2873 TU Darmstadt

Ilmoitettu laitos/ilmoitetut laitokset:

7. Ilmoitettu suoritustaso/ilmoitetut suoritustasot:**Mekaaninen kestävyys ja vakaus (BWR 1)**

Ominaiskestävyys staattisten ja kvasistaattisten kuormitusten aikana:

1 Yksittäisen ankkurin kestävyys ilman teräsvauriota vetokuormituksen alaisena: Katso lisäys, erityisesti liitteet C1, C3

2 Yksittäisen ankkurin kestävyys ilman teräsvaurioita leikkauskurmituksen alaisena vipuvarrella tai ilman: Katso lisäys, erityisesti liitteet C2, C3

3 Yksittäisen ankkurin kestävyys ulosvetovauriota tai tiilen irtoamista vastaan vetokuormituksen alaisena, Vähennyskerroin: Katso lisäys, erityisesti liitteet C5, C7, C10, C13, C15, C18

4 Tyypillinen ominainen tiilen rikkoutumista tai yksittäisen ankkurin tiilen murtumisvauriota vastaan leikkauskurmituksen alaisena: Katso lisäys, erityisesti liitteet C5, C7, C11, C13, C15, C19

5 Usean ankkurin kestävyys tiilen murtumisvauriolle jännityskurmituksen alaisena: Katso lisäys, erityisesti liitteet B13, B14, C4, C6, C8, C9, C12, C14, C17

6 Kestävyys tiilen murtumista tai ankkuriryhmän tiilen murtumisvauriota vastaan leikkauskurmituksen alaisena: Katso lisäys, erityisesti liitteet B13, B14, C4, C5, C6, C7, C8, C9, C11, C12, C13, C14, C15, C17, C19

7 Reuna etäisyydet, keskinäiset välit, osan paksuus: Katso lisäys, erityisesti liitteet B13, B14, C4, C6, C8, C9, C12, C14, C16

8 Siirtymät jännityksen ja leikkauskurmituksen alaisena: Katso lisäys, erityisesti liitte C21

9 Suurin väntömomentti asennuksessa: Katso lisäys, erityisesti liitteet B4-B7

Ominainen kestävyys ja siirtymät kuormituksella:

10 Kestävyys kuormitukselle, siirtymät: NPD

11 Leikkauskurman kestävyys, siirtymät: NPD

12 Rengasmaisen aukon kerroin: NPD

Turvallisuus tulipalon sattuessa (BWR 2)

13 Reaktio paloon: Luokka (A1)

14 Palonkestävyys vetro- ja leikkauskurmituksessa vipuvarrella ja ilman, vähimmäisreunaetäisyydet ja -välit: NPD

Hygienia, terveys ja ympäristö (BWR 3)

15 Vaarallisten aineiden pitoisuus, päästöt ja / tai vapautuminen: NPD

8. Asianmukainen tekninen asiakirja ja/tai tekninen erityisasiakirja:

-

Edellä yksilöidyn tuotteen suoritustaso on ilmoitettujen suoritustasojen joukon mukainen. Tämä suoritustasoilmoitus on asetuksen (EU) N:o 305/2011 mukaisesti annettu edellä ilmoitetun valmistajan yksinomaисella vastuulla.

Valmistajan puolesta allekirjoittanut:

Dr. Ronald Mihala, Kehitys- ja tuotantojohtaja
Tumlingen, 2024-12-12

Jürgen Grün Toimitusjohtaja Kemia & Laatu

Tämä suoritustasoilmoitus on laadittu useilla kielillä. Jos tulkinnasta syntyy erimielisyyttä, englanninkielinen versio on aina katsottava ensisijaiseksi.

Lisäys sisältää vapaaehtoisesti ilmoitettua ja täydentävää englanninkielistä tietoa, joka ylittää (kielestä riippumatta määritellyt) lakisääteiset vaatimukset.

Translation guidance Essential Characteristics and Performance Parameters for Annexes
Käännösopas oleellisten piirteiden ja suorituskyvyn parametrien liitteleille

Mechanical resistance and stability (BWR 1)	
Mekaaninen kestävyys ja vakaus (BWR 1)	
Characteristic resistance for static and quasi-static loading:	
Ominaiskestävyys staattisten ja kvasistaattisten kuormitusten aikana:	
1	Characteristic resistance to steel failure of a single anchor under tension loading: Yksittäisen ankkurin kestävyys ilman teräsvarioita vetokuormituksen alaisena:
2	Characteristic resistance to steel failure of a single anchor under shear loading with and without level arm: Yksittäisen ankkurin kestävyys ilman teräsvarioita leikkauskuormituksen alaisenavipuvarrella tai ilman:
3	Characteristic resistance to pull-out failure or brick breakout failure of a single anchor under tension loading, Reduction factor: Yksittäisen ankkurin kestävyys ulosvetovauriota tai tiilen irtoamista vastaan vetokuormituksen alaisena, Vähennyskerroin:
4	Characteristic resistance to local brick failure or brick breakout failure of a single anchor under shear loading: Tyypillinen ominainen tiilen rikkoutumista tai yksittäisen ankkurin tiilen murtumisvarioita vastaan leikkauskuormituksen alaisena:
5	Characteristic resistance to brick breakout failure of an anchor group under tension loading: Usean ankkurin kestävyys tiilen murtumisvariolle jännityskuormituksen alaisena:
6	Characteristic resistance to local brick failure or brick breakout failure of an anchor group under shear loading: Kestävyys tiilen murtumista tai ankkuriryhmän tiilen murtumisvarioita vastaan leikkauskuormituksen alaisena:
7	Edge distances, spacing, member thickness: Reuna etäisydet, keskinäiset välit, osan paksuus:
8	Displacements under tension and shear loading: Siirtymät jännityksen ja leikkauskuormituksen alaisena:
9	Maximum installation torque: Suurin väntömomentti asennuksessa:
Characteristic resistance and displacements for seismic loading:	
Ominainen kestävyys ja siirtymät kuormituksella:	
10	Resistance to tension load, displacements: Kestävyys kuormitukselle, siirtymät:
11	Resistance to shear load, displacements: Leikkauskorman kestävyys, siirtymät:
12	Factor annular gap: Rengasmaisen aukon kerroin:
Safety in case of fire (BWR 2)	
Turvallisuus tulipalon sattuessa (BWR 2)	
13	Reaction to fire: Reaktio paloon:
14	Resistance to fire under tension and shear loading with and without level arm, minimum edge distances and spacing: Palonkestävyys vetro- ja leikkauskuormituksessa vipuvarrella ja ilman, vähimmäisreunaetäisydet ja -välit:
Hygiene, health and the environment (BWR 3)	
Hygienia, terveys ja ympäristö (BWR 3)	
15	Content, emission and/or release of dangerous substances: Vaarallisten aineiden pitoisuus, päästöt ja / tai vapautuminen:

Specific Part

1 Technical description of the product

The fischer injection system FIS V Zero for masonry is a bonded anchor (injection type) consisting of a mortar cartridge with injection mortar fischer FIS V Zero, a perforated sleeve and an anchor rod with hexagon nut and washer or an internal threaded rod. The steel elements are made of zinc coated steel, stainless steel or high corrosion resistant steel.

The anchor rod is placed into a drilled hole filled with injection mortar and is anchored via the bond between steel element, injection mortar and masonry and mechanical interlock.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the fastener is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the fastener of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance for static and quasi-static loading	See Annexes B 4 to B 7, B 14 C 1 to C 21
Characteristic resistance and displacements for seismic loading	No performance assessed

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire under tension and shear loading with and without lever arm. Minimum edge distances and spacing	No performance assessed

3.3 Hygiene, health and the environment (BWR 3)

Essential characteristic	Performance
Content, emission and/or release of dangerous substances	No performance assessed

4

Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base


In accordance with the European Assessment Document EAD 330076-01-0604 the applicable European legal act is: [97/177/EC].

The system to be applied is: 1


Installation conditions part 1

Anchor rods with perforated sleeve FIS H K; Installation in perforated and solid brick masonry

Pre-positioned installation:

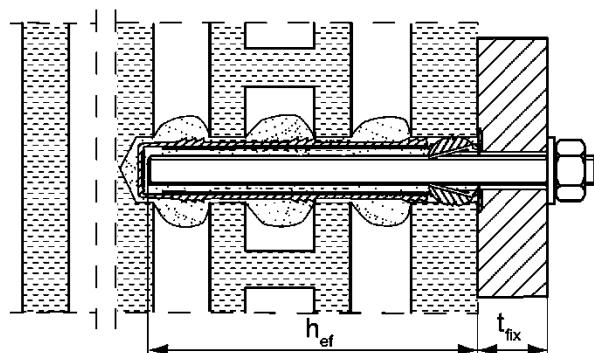

Installation with render bridge



Size of the perforated sleeve:

FIS H 12x50 K

FIS H 16x85 K


FIS H 20x85 K

FIS H 12x85 K


FIS H 16x130 K

FIS H 20x130 K

Push through installation:

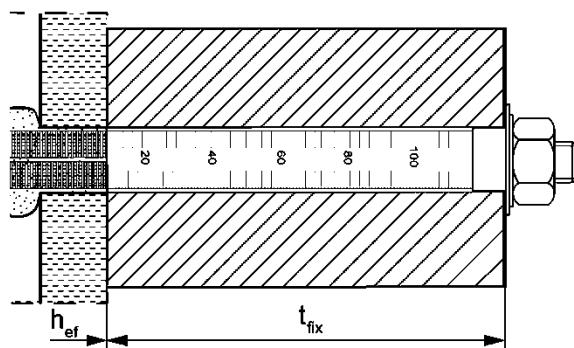

Installation with render bridge

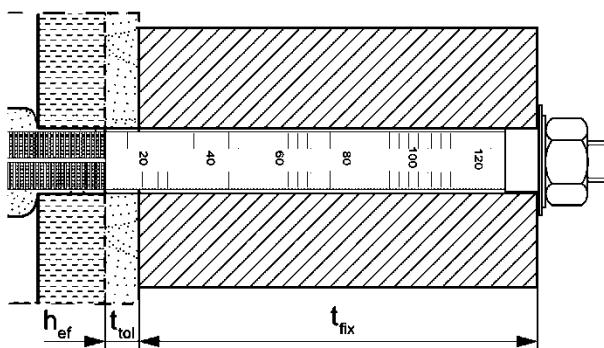

Size of the perforated sleeve:


FIS H 18x130/200 K

FIS H 22x130/200 K


Internal threaded anchor FIS E with perforated sleeve FIS H K;

Installation in perforated and solid brick masonry

Pre-positioned installation:

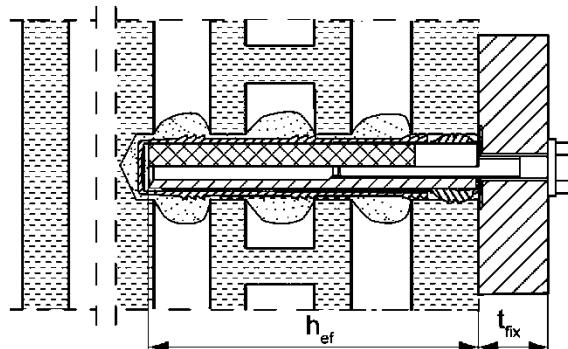

Installation with render bridge



Figures not to scale

h_{ef} = effective anchorage depth

t_{tol} = thickness of unbearing layer (e.g. plaster)

t_{fix} = thickness of fixture

fischer injection system FIS V Zero for masonry

Product description

Installation conditions part 1,


Anchor rods and internal threaded anchor with perforated sleeve FIS H K

Annex A1



Installation conditions part 2

Anchor rods without perforated sleeve FIS H K; installation in solid brick masonry and autoclaved aerated concrete (AAC)

Pre-positioned installation:

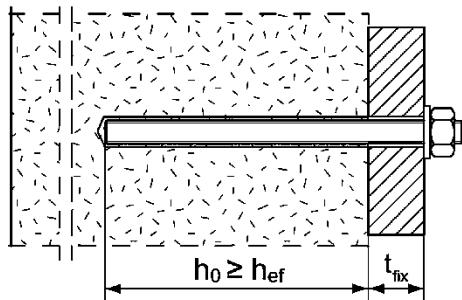


Push through installation: Annular gap filled with mortar




Installation with render bridge

Internal threaded anchors FIS E without perforated sleeve FIS H K; installation in solid brick masonry

Pre-positioned installation:

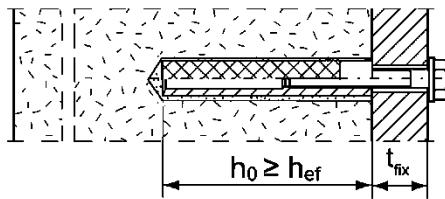

Installation with render bridge

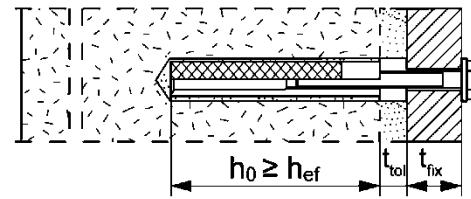

Figures not to scale

h_0 = depth of drill hole

t_{tol} = thickness of unbearing layer (e.g. plaster)

h_{ef} = effective anchorage depth

t_{fix} = thickness of fixture

fischer injection system FIS V Zero for masonry

Product description

Installation conditions part 2,



Anchor rods and internal threaded anchor without perforated sleeve

Annex A2


Overview system components part 1

Injection cartridge (shuttle cartridge) with sealing cap

Size: 360 ml, 825 ml





Imprint: fischer FIS V Zero, processing notes, shelf-life, piston travel scale (optional), curing time and processing time (depending on temperature), size, volume

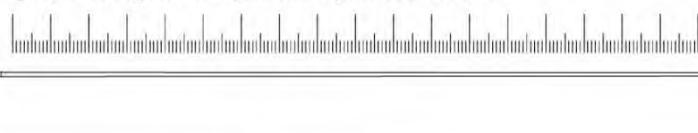

Injection cartridge (coaxial cartridge) with sealing cap

Size: 100 ml, 150 ml, 300 ml, 380 ml, 400 ml, 410 ml




Imprint: fischer FIS V Zero, processing notes, shelf-life, piston travel scale (optional), curing time and processing time (depending on temperature), size, volume




Static mixer MR Plus or FIS JMR (only 825ml) and extension tube


Static mixer FIS MR Plus



Static mixer FIS JMR



Extension tube



Cleaning brush BS



Blow-out pump ABG or ABP



Figures not to scale

fischer injection system FIS V Zero for masonry


Product description

Overview system components part 1: cartridge / static mixer / cleaning tools

Annex A3

Overview system components part 2

fischer anchor rod




Size: M8, M10, M12, M16

Internal threaded anchor FIS E



Size: 11x85 M8
15x85 M10 / M12

Perforated sleeve FIS H K




Size: FIS H 12x50 K
FIS H 12x85 K
FIS H 16x85 K
FIS H 20x85 K



Size: FIS H 16x130 K
FIS H 20x130 K

Perforated sleeve FIS H K (push through installation)



Size:
FIS H 18x130/200 K
FIS H 22x130/200 K

Washer



Hexagon nut



Figures not to scale

fischer injection system FIS V Zero for masonry

Product description

Overview system components part 2: Metal parts / perforated sleeves FIS H K

Annex A4

Table A5.1: Materials


Part	Designation	Material		
1	Injection cartridge	Mortar, hardener; filler		
	Steel grade	Steel	Stainless steel R	High corrosion-resistant steel HCR
		zinc plated	acc. to EN 10088-1:2023 Corrosion resistance class CRC III acc. to EN 1993-1-4:2020	acc. to EN 10088-1:2023 Corrosion resistance class CRC V acc. to EN 1993-1-4:2020
2	Anchor rod	Property class 4.6; 4.8; 5.8 or 8.8; EN ISO 898-1: 2013 zinc plated $\geq 5\mu\text{m}$, EN ISO 4042:2022 Zn5/An(A2K) or hot-dip galvanised EN ISO 10684:2004+AC:2009 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ fracture elongation	Property class 50, 70 or 80 EN ISO 3506-1:2020 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4062; 1.4662; 1.4462; EN 10088-1:2023 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ fracture elongation	Property class 50 or 80 EN ISO 3506-1:2020 or property class 70 with $f_{yk} = 560 \text{ N/mm}^2$ 1.4565; 1.4529 EN 10088-1:2023 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ fracture elongation
3	Washer ISO 7089:2000	zinc plated $\geq 5\mu\text{m}$, ISO 4042:2022 Zn5/An(A2K) or hot-dip galvanised EN ISO 10684:2004	1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2023	1.4565; 1.4529 EN 10088-1:2023
4	Hexagon nut	Property class 5 or 8; EN ISO 898-2:2012 zinc plated $\geq 5\mu\text{m}$, ISO 4042:2022 Zn5/An(A2K) or hot-dip galvanised ISO 10684:2004	Property class 50, 70 or 80 EN ISO 3506-1:2020 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2023	Property class 50, 70 or 80 EN ISO 3506-1:2020 1.4565; 1.4529 EN 10088-1:2023
5	Internal threaded anchor FIS E	Property class 5.8; EN 10277-1:2018 zinc plated $\geq 5\mu\text{m}$, ISO 4042:2022 Zn5/An(A2K)	Property class 70 EN ISO 3506-1:2020 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2023	Property class 70 EN ISO 3506-1:2020 1.4565; 1.4529 EN 10088-1:2023
6	Commercial standard screw or threaded rod for internal threaded anchor FIS E	Property class 5.8 or 8.8; EN ISO 898-1:2013 zinc plated $\geq 5\mu\text{m}$, ISO 4042:2022 Zn5/An(A2K)	Property class 70 EN ISO 3506-1:2020 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2023	Property class 70 EN ISO 3506-1:2020 1.4565; 1.4529 EN 10088-1:2023
7	Perforated sleeve FIS H K	PP / PE		

fischer injection system FIS V Zero for masonry

Product description
Materials
Annex A5

Specifications of intended use (part 1)

Table B1.1: Overview installation and use

		fischer injection system FIS V Zero for masonry	
Hole drilling with hammer drill mode 		all bricks	
Hole drilling with rotary drill mode 		all bricks	
Static and quasi-static load		all bricks	
Use conditions	dry masonry	all bricks	
Installation	Pre-positioned	Anchor rod or internal threaded anchor (in solid brick masonry and autoclaved aerated concrete)	Perforated sleeve with anchor rod or internal threaded anchor (in perforated and solid brick masonry) Size: FIS H 12x50 K FIS H 12x85 K FIS H 16x85 K FIS H 16x130 K FIS H 20x85 K FIS H 20x130 K
	Push through	Anchor rod (in solid brick masonry and autoclaved aerated concrete)	Perforated sleeve with anchor rod (in perforated and solid brick masonry) Size: FIS H 18x130/200 K FIS H 22x130/200 K
Installation and use conditions	condition d/d (dry/dry)	all bricks	
Installation temperature		$T_{i,min} = -10 \text{ }^{\circ}\text{C}$ to $T_{i,max} = +40 \text{ }^{\circ}\text{C}$	
Service temperature	Temperature range Ta	-40 °C to +40 °C	(max. short term temperature +40 °C max. long term temperature +24 °C)
	Temperature range Tb	-40 °C to +80 °C	(max. short term temperature +80 °C max. long term temperature +50 °C)
	Temperature range Tc	-40 °C to +120 °C	(max. short term temperature +120 °C; max. long term temperature +72 °C)
fischer injection system FIS V Zero for masonry			Annex B1
Intended use Specifications (part 1)			

Specifications of intended use (part 2)

Anchorages subject to:

- Static and quasi-static loads

Base materials:

- Solid brick masonry (base material group b) and AAC masonry (base material group d), acc. to Annex B 12
- Hollow brick masonry (base material group c), according to Annex B12
- Minimum thickness of masonry member is $h_{ef}+30\text{mm}$
- Mortar strength class of the masonry M2,5 at minimum according to EN 998-2:2016
- For other bricks in solid masonry, hollow, perforated masonry or AAC masonry the characteristic resistance of the anchor may be determined by job site tests according to EOTA Technical Report TR 053:2016-04 under consideration of the β -factor according to Annex C20, Table C20.1

Note (only applies to solid bricks and AAC):

The characteristic resistance is also valid for larger brick sizes, higher mean compressive strength and higher mean gross dry density of the masonry unit.

Temperature Range:

- **T_a**: from -40°C to +40°C (max. short term temperature +40°C and max. long term temperature +24°C)
- **T_b**: from -40°C to +80°C (max. short term temperature +80°C and max. long term temperature +50°C)
- **T_c**: from -40°C to +120°C (max. short term temperature +120°C and max. long term temperature +72°C)

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc plated steel, stainless steel or high corrosion resistant steel)
- For all other conditions according to EN 1993-1-4:2006+A2:2020 corresponding to corrosion resistance classes to Annex A5, Table A5.1.

fischer injection system FIS V Zero for masonry

Intended use
Specifications (part 2)

Annex B2

Specifications of intended use (part 2 continued)

Design:

- The anchorages have to be designed in accordance with EOTA Technical Report TR 054:2022-07, Design method A under the responsibility of an experienced in anchorages and masonry work.
- Applies to all bricks, if no other values are specified:

$$N_{Rk} = N_{Rk,b} = N_{Rk,p} = N_{Rk,b,c} = N_{Rk,p,c}$$

$$V_{Rk} = V_{Rk,b} = V_{Rk,c,II} = V_{Rk,c,\perp}$$

For the Calculation of pulling out a brick under tension load $N_{Rk,pb}$ or pushing out a brick under shear load $V_{Rk,pb}$ see EOTA Technical Report TR 054:2022-07.

$N_{Rk,s}$, $V_{Rk,s}$ and $M^0_{Rk,s}$ see annex C1-C3

Factors for job site tests see Annex C20 and displacements see Annex C21

- Verifiable calculation notes and drawings have to be prepared taking account the relevant masonry in the region of the anchorage, the loads to be transmitted and their transmission to the supports of the structure. The position of the anchor is indicated on the design drawings.

Installation:

- Condition d/d: Installation and use in structures subject to dry, internal conditions
- Hole drilling see Annex B1.1
- In case of aborted hole: The hole shall be filled with mortar
- Bridging of unbearing layer (e.g. plaster) at perforated brick masonry see Annex B6, Table B6.1
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Fastening screws or anchor rods (including nut and washer) must comply with the appropriate material and property class of the fischer internal threaded anchor FIS E.
- Minimum curing time see Annex B8, Table B8.2
- Commercial standard threaded rods, washers and hexagon nuts may also be used if the following requirements are fulfilled:

Material dimensions and mechanical properties of the metal parts according to the specifications are given in Annex A5, Table 5.1

Conformation of material and mechanical properties of the metal parts by inspection certificate 3.1 according to EN 10204:2004, the documents shall be stored

Marking of the anchor rod with the effective anchorage depth. This may be done by the manufacturer of the rod or by a person on job site

fischer injection system FIS V Zero for masonry

Intended use
Specifications (part 2 continued)


Annex B3

Table B4.1: Installation parameters for anchor rods in solid bricks and AAC without perforated sleeves FIS H K

Anchor rod	Thread	M8	M10	M12	M16
Nominal drill hole diameter	d_0 [mm]	10	12	14	18
Effective anchorage depth $h_{ef}^{(1)}$ in solid brick (cycl. drill hole)	$h_{0,min}=h_{ef,min}$ [mm]			100	
Effective anchorage depth $h_{ef}^{(1)}$ in solid brick (depth of drill hole $h_0 = h_{ef}$)	$h_{ef,max}$ [mm]			50	
Diameter of clearance hole in the fixture	pre-positioned installation $d_f \leq$ [mm] push through installation $d_f \leq$ [mm]	9	12	14	18
Diameter of cleaning brush	$d_b \geq$ [mm]			see Table B8.1	
Maximum installation torque	max T_{inst} [Nm]			see parameters of brick Annex C	

¹⁾ $h_{ef,min} \leq h_{ef} \leq h_{ef,max}$ is possible.

fischer anchor rods M8, M10, M12, M16

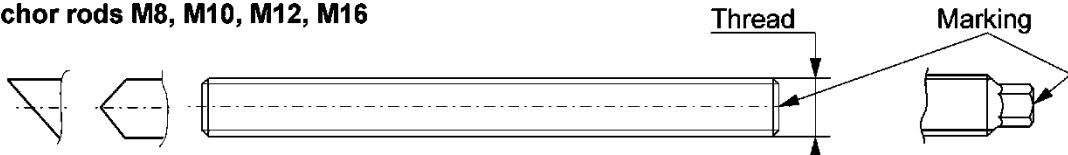

Marking (on random place) fischer anchor rod:


Steel zinc plated PC ¹⁾ 8.8	• or +	Steel hot-dip galvanised PC ¹⁾ 8.8	•
High corrosion resistant steel HCR PC ¹⁾ 50	•	High corrosion resistant steel HCR PC ¹⁾ 70	-
High corrosion resistant steel HCR PC ¹⁾ 80	(Stainless steel R property class 50	~
Stainless steel R property class 80	*		

Alternatively: Colour coding according to DIN 976-1: 2016;
property class 4.6 marking according to EN ISO 898-1:2013

¹⁾ PC = property class

Installation conditions:

Anchor rod

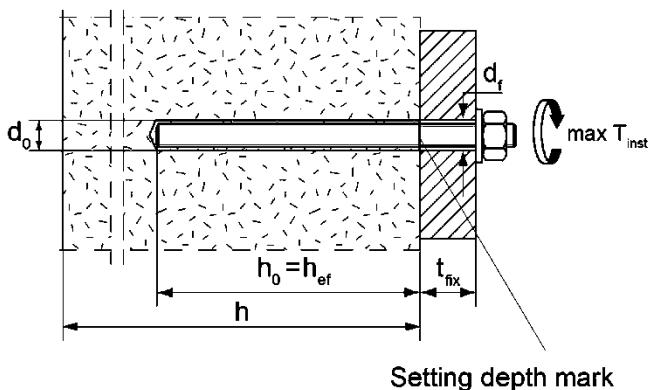

Figures not to scale

fischer injection system FIS V Zero for masonry

Intended use


Installation parameters for anchor rods without perforated sleeve

Annex B4

Table B5.1: Installation parameters for internal threaded anchors FIS E in solid bricks without perforated sleeves

Internal threaded anchor FIS E	11x85 M8	15x85 M10	15x85 M12
Diameter of anchor d_H [mm]	11	15	
Nominal drill hole diameter d_0 [mm]	14	18	
Length of anchor L_H [mm]		85	
Effective anchorage depth $h_0 = h_{ef}$ [mm]		85	
Diameter of cleaning brush $d_b \geq$ [mm]		see Table B8.1	
Maximum installation torque $\max T_{inst}$ [Nm]		see parameters of brick Annex C4-C16	
Diameter of clearance hole in the fixture d_f [mm]	9	12	14
Screw-in depth l_E, min [mm]	8	10	12
l_E, max [mm]		60	

fischer Internal threaded anchor FIS E

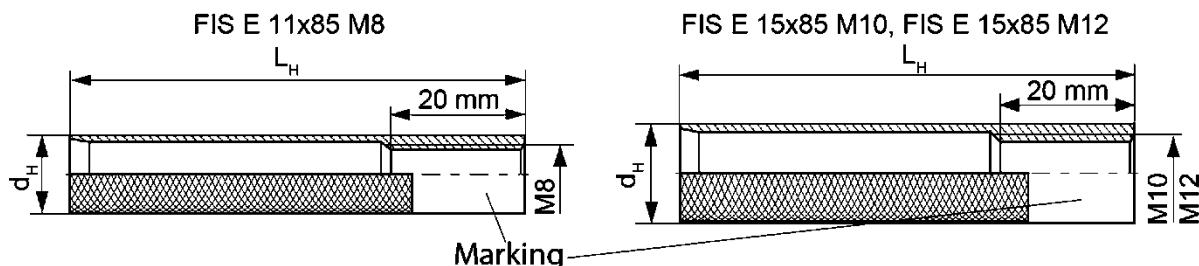


Marking:

Size, e.g. **M8**, Stainless steel: R, e.g. **M8 R**, High corrosion-resistant steel: HCR, e.g. **M8 HCR**

Installation conditions:

Internal threaded anchor

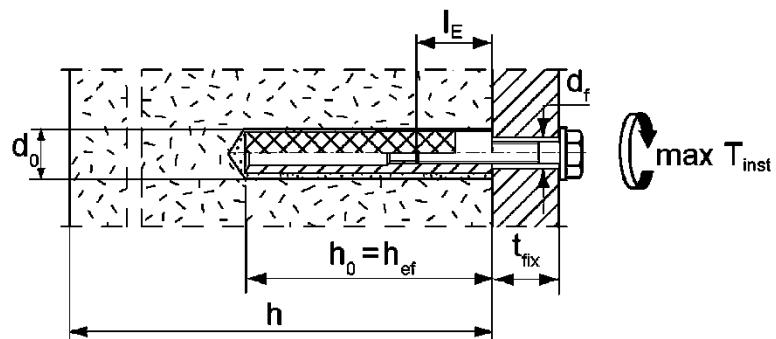

Figures not to scale

fischer injection system FIS V Zero for masonry

Intended use

Installation parameters for internal threaded rods FIS E without perforated sleeve

Annex B5

Table B6.1: Installation parameters for anchor rods and internal threaded anchors FIS E with perforated sleeves FIS H K (pre-positioned installation)

perforated sleeve FIS H K	12x50	12x85 ²⁾	16x85	16x130 ²⁾	20x85	20x130 ²⁾
Nominal drill hole diameter $d_0 = D_{\text{sleeve,nom}}$		12		16		20
Depth of drill hole	h_0 [mm]	55	90	90	135	90
Effective anchorage depth	$h_{\text{ef,min}}$ [mm]	50	65	85	110	85
	$h_{\text{ef,max}}$ [mm]	50	85	85	130	85
Size of threaded rod	[-]	M8		M8 and M10		M12 and M16
Size of internal threaded anchor FIS E	-	-	11x85	-	15x85	-
Diameter of cleaning brush ¹⁾	$d_b \geq$ [mm]			see Table B8.1		
Maximum installation torque	max T_{inst} [Nm]			see parameters of brick Annex C		

¹⁾ Only for solid areas in hollow bricks and solid bricks.


²⁾ Bridging of unbearing layer (e.g. plaster) is possible. When reducing the effective anchorage depth $h_{\text{ef,min}}$, the values of the next shorter perforated sleeve of the same diameter must be used. The smaller value of characteristic resistance must be taken.

Perforated sleeve

FIS H 12x50 K; FIS H 12x85 K; FIS H 16x85 K; FIS H 16x130 K;
FIS H 20x85 K; FIS H 20x130 K


Marking:

Size $D_{\text{sleeve,nom}} \times L_{\text{sleeve}}$
(e.g.: 16x85)

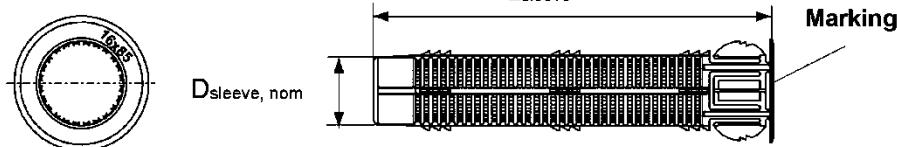


fischer Internal threaded anchor FIS E

FIS E 11x85 M8

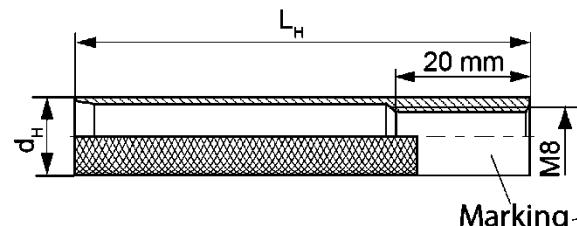


FIS E 15x85 M10, FIS E 15x85 M12

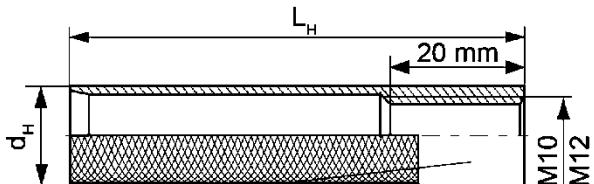


Installation conditions:

Anchor rod with perforated sleeve

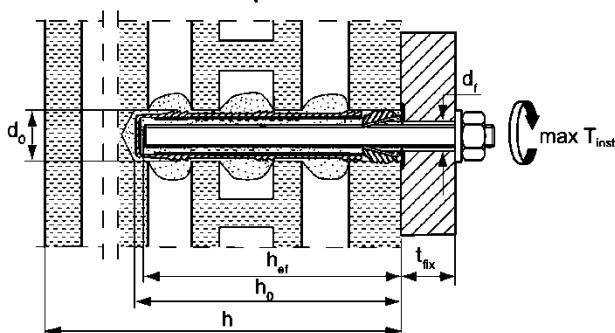

Internal threaded anchor with perforated sleeve

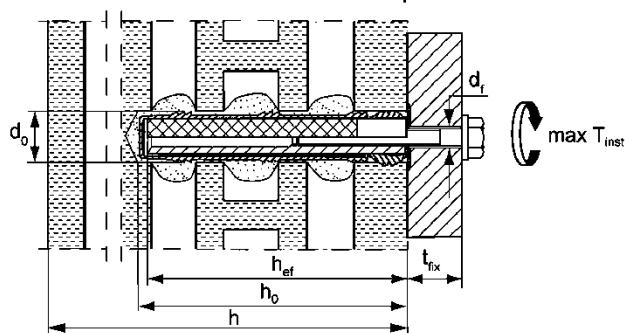

Figures not to scale

fischer injection system FIS V Zero for masonry

Intended use

Installation parameters for anchor rods and internal threaded anchors FIS E with perforated sleeve FIS H K (pre-positioned installation)

Annex B6


Table B7.1: Installation parameters for anchor rods with perforated push through sleeves
(push through installation)

Perforated sleeve FIS H K	18x130/200	22x130/200	
Nominal sleeve diameter $D_{\text{ sleeve,nom }}$ [mm]	16	20	
Nominal drill hole diameter d_0 [mm]	18	22	
Depth of drill hole h_0 [mm]	135		
Effective anchorage depth h_{ef} [mm]		≥ 130	
Diameter of cleaning brush ¹⁾ $d_b \geq$ [mm]		see Table B8.1	
Size of threaded rod [-]	M10	M12	M16
Maximum installation torque max T_{inst} [Nm]		see parameters of brick Annex C	
Thickness of fixture $t_{\text{fix,max}}$ [mm]		200	

¹⁾ Only for solid areas in hollow bricks and solid bricks.


Perforated push through sleeve

FIS H 18x130/200 K; FIS H 22x130/200 K

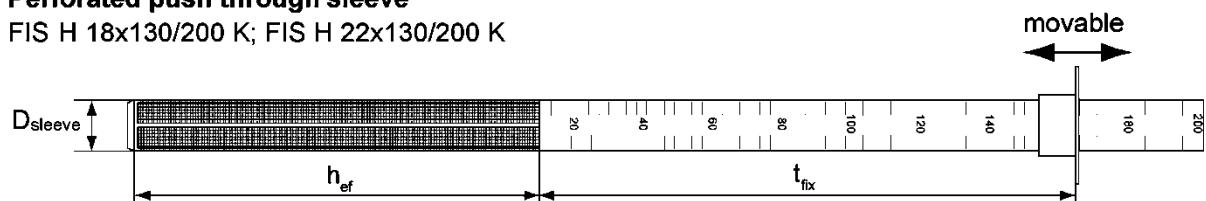

Installation conditions:

Anchor rod with perforated sleeve

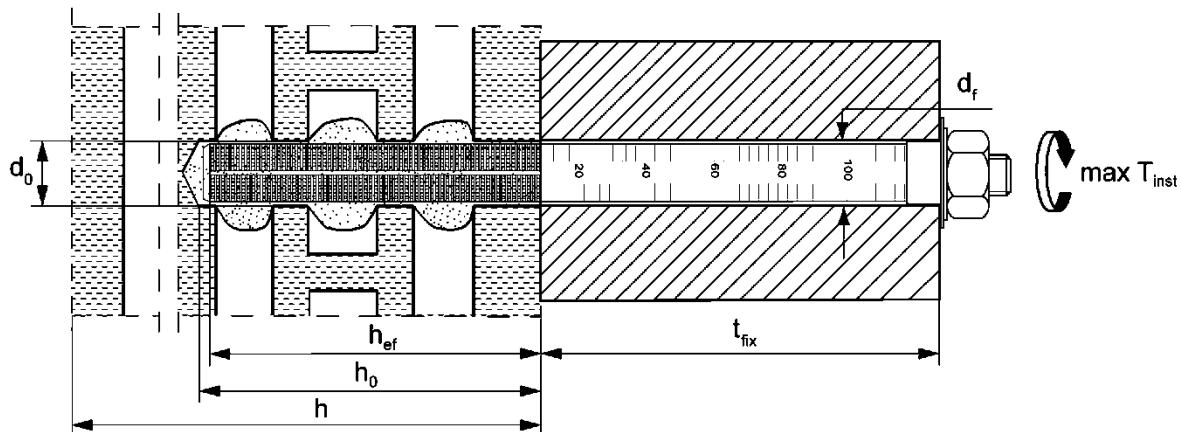

Figures not to scale

fischer injection system FIS V Zero for masonry

Intended use


Installation parameters for anchor rods with perforated push through sleeves
(push through installation)

Annex B7

Table B8.1: Parameters of the cleaning brush BS (steel brush with steel bristles)

The size of the cleaning brush refers to the drill hole diameter

Nominal drill hole diameter	d_0 [mm]	10	12	14	16	18	20	22
Steel brush diameter	d_b [mm]	11	14	16	20	20	25	25

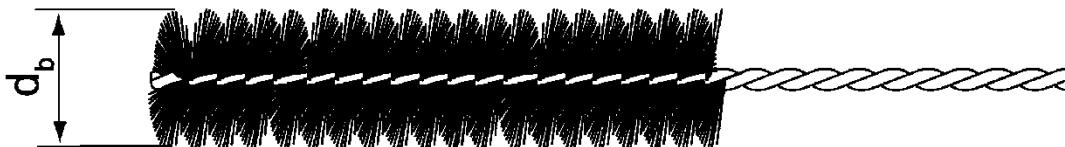

Only for solid areas in hollow bricks or solid bricks and autoclaved aerated concrete

Table B8.2: Maximum processing times and minimum curing times

(During the curing time of the mortar the temperature of the anchoring base may not fall below the listed minimum temperature)

Temperature at anchoring base [°C]	Maximum processing time t_{work}	Minimum curing time t_{cure}
	FIS V Zero	FIS V Zero
-10 to -5 ¹⁾	6 h	72 h
> -5 to 0 ¹⁾	2 h	24 h
> 0 to 5 ¹⁾	45 min	12 h
> 5 to 10	20 min	6 h
> 10 to 15	8 min	3 h
> 15 to 20	5 min	2 h
> 20 to 25	3 min	1 h
> 25 to 30	2 min	45 min
> 30 to 40	1 min	30 min

¹⁾ Minimum cartridge temperature +5°C

Figures not to scale

fischer injection system FIS V Zero for masonry

Intended use











Parameters of the cleaning brush (steel brush)

Processing time and curing time

Annex B8

Installation instruction part 1

Installation in solid brick and autoclaved aerated concrete without perforated sleeve

1		Drill the hole (drilling method see Annex C of the respective brick) depth of drill hole h_0 and nominal drill hole diameter d_0 see Table B4.1; B5.1		
2				Blow out the drill hole twice. Brush twice and blow out twice again.
3		Remove the sealing cap. Screw on the static mixer. (the spiral in the static mixer must be clearly visible)		
4		Place the cartridge into a suitable dispenser		Extrude approximately 10 cm of material out until the resin is evenly grey in colour. Do not use mortar that is not uniformly grey.
5		Fill approximately 2/3 of the drill hole with mortar beginning from the bottom of the hole. ¹⁾ Avoid bubbles.		For push through installation fill the annular gap with mortar.
6		Only use clean and oil-free metal parts. Mark the setting depth. Insert the anchor rod or internal threaded anchor FIS E by hand. Recommendation: Rotation back and forth of the anchor rod or internal threaded anchor FIS E makes pushing easy. When reaching the setting depth mark, excess mortar must emerge from the mouth of the drill hole.		
7		Do not touch. Minimum curing time see Table B8.2		Mounting the fixture. max T_{inst} see parameter of brick.

¹⁾ Exact volume of mortar see manufacturer's specifications

fischer injection system FIS V Zero for masonry

Intended use







Installation instruction part 1

Installation in solid brick without perforated sleeve

Annex B9

Installation instruction part 2

Installation in perforated or solid brick with perforated sleeve (pre-positioned installation)

1		Drill the hole (drilling method see Annex C of the respective brick). depth of drill hole h_0 and nominal drill hole diameter d_0 see Table B6.1	When install perforated sleeves in solid bricks or solid areas of hollow bricks, also clean the hole by blowing out and brushing.
2		Remove the sealing cap. Screw on the static mixer. (the spiral in the static mixer must be clearly visible)	
3		Place the cartridge into a suitable dispenser.	 Extrude approximately 10 cm of material out until the resin is evenly grey in colour. Do not use mortar that is not uniformly grey.
4		Insert the perforated sleeve flush with the surface of the masonry or plaster.	 Fill the perforated sleeve completely with mortar beginning from the bottom of the hole. ¹⁾
5		Only use clean and oil-free metal parts. Mark the setting depth. Insert the anchor rod or the internal threaded anchor FIS E by hand. Recommendation: Rotation back and forth of the anchor rod or internal threaded anchor FIS E makes pushing easy until reaching the setting depth mark (anchor rod) or flush with the surface (internal threaded anchor).	
6		Do not touch. Minimum curing time see Table B8.2	 max T_{inst} Mounting the fixture. max T_{inst} see parameter of brick.

¹⁾ Exact volume of mortar see manufacturer's specification.

fischer injection system FIS V Zero for masonry

Intended use











Installation instruction part 2

Installation in perforated or solid brick with perforated sleeve (pre-positioned installation)

Annex B10

Installation instruction part 3

Installation in perforated or solid brick with perforated sleeve (push through installation)

1		Push the movable stop up to the correct thickness of fixture and cut the overlap.		Drill the hole through the fixture. Depth of drill hole ($h_0 + t_{fix}$) and nominal drill hole diameter d_0 see Table B7.1
2		Remove the sealing cap. Screw on the static mixer. (the spiral in the static mixer must be clearly visible)		
3		Place the cartridge into a suitable dispenser.		Extrude approximately 10 cm of material out until the resin is evenly grey in colour. Do not use mortar that is not uniformly grey.
4		Insert the perforated sleeve flush with the surface of the fixture into the drill hole.		Fill the sleeve with mortar beginning from the bottom of the hole. ¹⁾ For deep drill holes use an extension tube.
5		Only use clean and oil-free metal parts. Mark the setting depth. Insert the anchor rod by hand. Recommendation: Rotation back and forth of the anchor rod makes pushing easy until reaching the setting depth mark (anchor rod).		
6		Do not touch. Minimum curing time see Table B8.2		Mounting the fixture. max T_{inst} see parameter of brick.

¹⁾ Exact volume of mortar see manufacturer's specification.

fischer injection system FIS V Zero for masonry

Intended use

Installation instruction part 3

Installation in perforated or solid brick with perforated sleeve (push through installation)

Annex B11


Appendix 18 / 42

Table B12.1: Overview of assessed bricks


Kind of masonry	Brick format [mm]	Mean compressive strength [N/mm ²]	Main country of origin	Mean gross dry density ρ [kg/dm ³]	Annex
Solid brick Mz					
Solid brick Mz	≥ 230x108x55	36 - 48	Denmark	≥2,0	C4/C5
Solid calcium silicate (sand - lime) brick KS / perforated calcium silicate (sand - lime) brick KSL					
Solid calcium silicate brick KS	NF	≥240x115x71	8- 20	Germany	≥2,0
Perforated calcium silicate brick KSL	3DF	240x175x113	8 - 16	Germany	≥1,6
Vertical perforated brick HLz					
Vertical perforated brick HLz	230x108x55	6 - 16	Denmark	≥1,6	C12/C13
Lightweight aggregate concrete hollow block Hbl					
Lightweight aggregate concrete hollow block Hbl	500x200x200	2 - 4	France	≥1,0	C14/C15
Autoclaved aerated concrete					
AAC	PP2 / AAC	2		≥0,35	
	PP4 / AAC	4	Germany	≥0,5	
	PP6 / AAC	6		≥0,65	C16-C19

Table B12.2: Overview dimensions of perforated and hollow bricks


Perforated calcium silicate (sand-lime) brick KSL, 3DF, EN 771-2:2011+A1:2015; e.g. KS Wemding according to Annex C8



Lightweight aggregate concrete hollow block Hbl, EN 771-3: 2011+A1:2015; e.g. Sepa according to Annex C 14

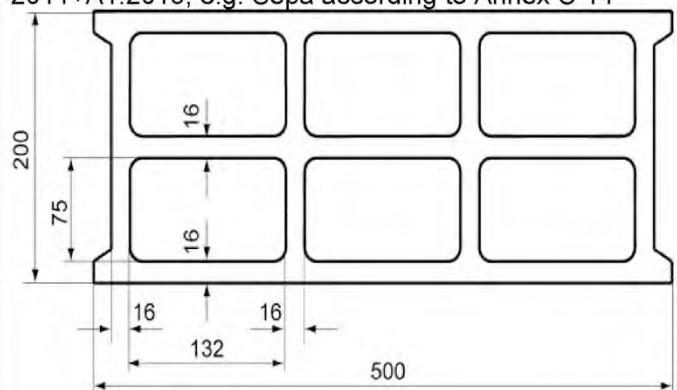

Vertical perforated brick HLz, EN 771-1: 2011+A1:2015; e.g. Wienerberger according to Annex C 12

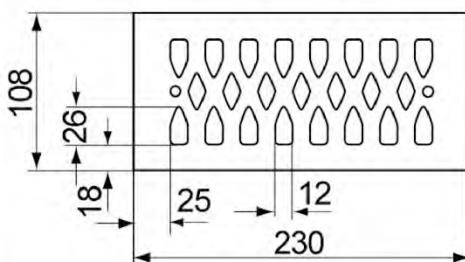

Measures in [mm]

Figures not to scale

fischer injection system FIS V Zero for masonry

Intended use


Overview of assessed bricks

Overview dimensions of perforated and hollow bricks

Annex B12

Appendix 19 / 42

Spacing and edge distance

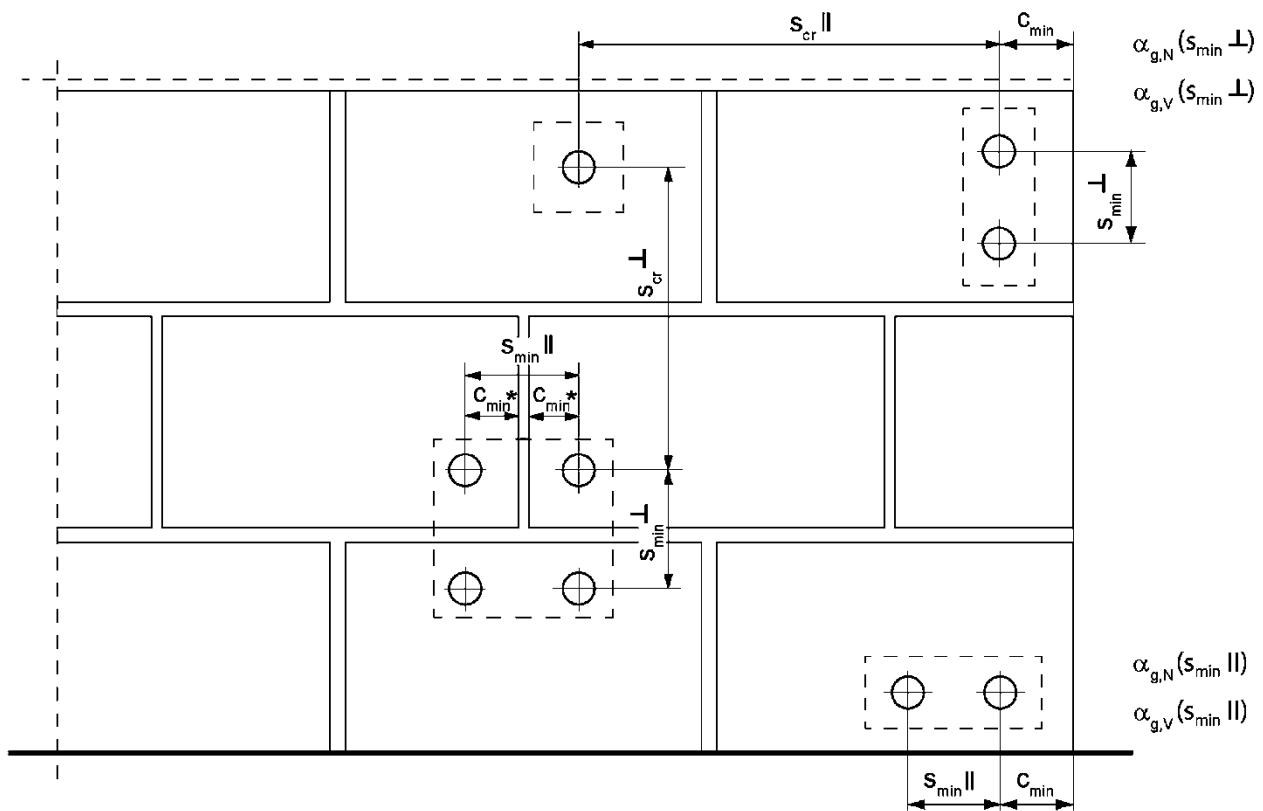

* Only, if vertical joints are not completely filled with mortar

- $s_{min \parallel}$ = Minimum spacing parallel to horizontal joint
- $s_{min \perp}$ = Minimum spacing perpendicular to horizontal joint
- $s_{cr \parallel}$ = Characteristic spacing parallel to horizontal joint
- $s_{cr \perp}$ = Characteristic spacing perpendicular to horizontal joint
- $c_{cr} = c_{min}$ = Edge distance
- $\alpha_{g,N}(s_{min \parallel})$ = Group factor for tension load, anchor group parallel to horizontal joint
- $\alpha_{g,V}(s_{min \parallel})$ = Group factor for shear load, anchor group parallel to horizontal joint
- $\alpha_{g,N}(s_{min \perp})$ = Group factor for tension load, anchor group vertical to horizontal joint
- $\alpha_{g,V}(s_{min \perp})$ = Group factor for shear load, anchor group vertical to horizontal joint

Spacing and edge distance (continuation)

For $s \geq s_{cr}$ $\alpha_g = 2$

For $s_{min} \leq s < s_{cr}$ α_g according to installation parameters of brick Annex C

Group of 2 anchors

$$N^g_{Rk} = \alpha_{g,N} \cdot N_{Rk}; \quad V^g_{Rk,b} = V^g_{Rk,c,II} = V^g_{Rk,c,\perp} = \alpha_{g,V} \cdot V_{Rk}$$

Group of 4 anchors

$$N^g_{Rk} = \alpha_{g,N} (s_{min,II}) \cdot \alpha_{g,N} (s_{min,\perp}) \cdot N_{Rk};$$

$$V^g_{Rk,b} = V^g_{Rk,c,II} = V^g_{Rk,c,\perp} = \alpha_{g,V} (s_{min,II}) \cdot \alpha_{g,V} (s_{min,\perp}) \cdot V_{Rk}$$

with N_{Rk} and $\alpha_{g,N}$ depending on $s_{min,II}$ or $s_{min,\perp}$ acc. to Annex C

with V_{Rk} and $\alpha_{g,V}$ depending on $s_{min,II}$ or $s_{min,\perp}$ acc. to Annex C

fischer injection system FIS V Zero for masonry

Intended use
Spacing and edge distance (continuation)

Annex B14

Table C1.1: Characteristic resistance to steel failure of a single anchor under tension loading of fischer anchor rods and standard threaded rods

Anchor rod / standard threaded rod		M8 ³⁾	M10 ³⁾	M12	M16
Characteristic resistance to steel failure under tension loading					
Characteristic resistance $N_{Rk,s}$	Property class	4.6	15(13)	23(21)	33
		4.8	15(13)	23(21)	63
		5.8	19(17)	29(27)	43
		8.8	29(27)	47(43)	79
		50	19	29	126
		70	26	41	43
		80	30	47	79
					110
Partial factors¹⁾					
$\gamma_{Ms,N}$	Property class	4.6		2,00	
		4.8		1,50	
		5.8		1,50	
		8.8		1,50	
		50		2,86	
		70		1,50 ²⁾ / 1,87	
		80		1,60	

¹⁾ In absence of other national regulations

²⁾ Only for fischer anchor rod FIS A made of high corrosion-resistant steel HCR

³⁾ Values in brackets are valid for undersized threaded rods with smaller stress area A_s for hot dip galvanised standard threaded rods according to EN ISO 10684:2004+AC:2009

fischer injection system FIS V Zero for masonry

Performances

Characteristic resistance to steel failure of a single anchor under tension loading of fischer anchor rods and standard threaded rods

Annex C1

Table C2.1: Characteristic resistance to **steel failure** of a single anchor under shear loading with and without lever arm of **fischer anchor rods** and **standard threaded rods**

Anchor rod / standard threaded rod		M8 ³⁾	M10 ³⁾	M12	M16		
Characteristic resistance to steel failure under shear loading							
without lever arm							
Characteristic resistance $V_{Rk,s}$	Property class	4.6	[kN]	9(8)	14(13)		
		4.8		9(8)	14(13)		
		5.8		11(10)	17(16)		
		8.8		15(13)	23(21)		
		50	[Nm]	9	15		
		70		13	20		
		80		15	23		
					34		
with lever arm							
Characteristic resistance $M_{Rk,s}$	Property class	4.6	[Nm]	15(13)	30(27)		
		4.8		15(13)	30(27)		
		5.8		19(16)	37(33)		
		8.8		30(26)	60(53)		
		50	[-]	19	37		
		70		26	52		
		80		30	60		
					105		
Partial factors¹⁾							
Partial factors $\gamma_{Ms,V}$	Property class	4.6	[-]	1,67			
		4.8		1,25			
		5.8		1,25			
		8.8		1,25			
		50	[-]	2,38			
		70		1,25 ²⁾ / 1,56			
		80		1,33			
1) In absence of other national regulations							
2) Only for fischer anchor rod FIS A made of high corrosion-resistant steel HCR							
3) Values in brackets are valid for undersized threaded rods with smaller stress area A_s for hot dip galvanised standard threaded rods (M8 resp. M10) according to EN ISO 10684:2004+AC:2009.							
fischer injection system FIS V Zero for masonry							
Performances							
Characteristic resistance to steel failure of a single anchor under shear loading with and without lever arm of fischer anchor rods and standard threaded rods							
Annex C2							
Appendix 23 / 42							

Table C3.1: Characteristic resistance to steel failure of a single anchor under tension / shear loading of internal threaded anchors FIS E

fischer internal threaded anchor FIS E			M8	M10	M12	
Characteristic resistance to steel failure under tension loading						
Characteristic resistance with screw N _{Rk,s}	Property class	5.8	[kN]	18	29	
	Property class 70	R		26	41	
		HCR		26	41	
Partial factors ¹⁾						
Partial factors γ _{Ms,N}	Property class	5.8	[-]	1,50		
	Property class 70	R		1,87		
		HCR		1,87		
Characteristic resistance to steel failure under shear loading						
without lever arm						
Characteristic resistance with screw V _{Rk,s}	Property class	5.8	[kN]	9	15	
	Property class 70	R		13	20	
		HCR		13	20	
with lever arm						
Characteristic resistance M ⁰ _{Rk,s}	Property class	5.8	[Nm]	19	37	
	Property class 70	R		26	52	
		HCR		26	52	
Partial factors ¹⁾						
Partial factors γ _{Ms,V}	Property class	5.8	[-]	1,25		
	Property class 70	R		1,56		
		HCR		1,56		

¹⁾ In absence of other national regulations


fischer injection system FIS V Zero for masonry

Performances

Characteristic resistance to steel failure of a single anchor under tension / shear loading of internal threaded anchors FIS E

Annex C3

Solid brick Mz, EN 771-1: 2011+A1:2015

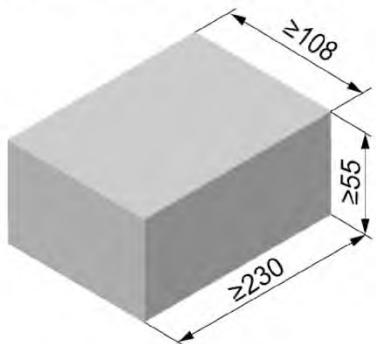

Solid brick Mz, EN 771-1: 2011+A1:2015		
Producer	e.g. Wienerberger	
Nominal dimensions [mm]	length L	width W
≥ 230	≥ 108	≥ 55
Mean gross dry density ρ [kg/dm ³]	≥ 2,0	
Normalised mean compressive strength [N/mm ²]	36 / 48	
Standard	EN 771-1: 2011+A1:2015	

Table C4.1: Installation parameters

Anchor rod	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E	-	-	-	-	M8	M10 M12
					11x85	15x85
Anchor rod and internal threaded anchor FIS E without perforated sleeve						
Effective anchorage depth h_{ef} [mm]	50	80	50	80	50	85
Max. installation torque $\text{max } T_{\text{inst}}$ [Nm]			10			10
General installation parameters						
Edge distance $c_{\min} = c_{\text{cr}}$				100		
Spacing	$s_{\min \parallel}$			100		
	$s_{\text{cr} \parallel}$	[mm]		3 x h_{ef}		
	$s_{\min \perp}$			100		
	$s_{\text{cr} \perp}$			3 x h_{ef}		
Drilling method						
Hole drilling with rotary drill mode or hammer drilling with hard metal hammer drill						

Table C4.2: Group factors

Anchor rods	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E	-	-	-	-	M8	M10 M12
					11x85	15x85
Group factors	$\alpha_{g,N} (s_{\min \parallel})$			1,81		
	$\alpha_{g,V} (s_{\min \parallel})$			1,49		
	$\alpha_{g,N} (s_{\min \perp})$			1,74		
	$\alpha_{g,V} (s_{\min \perp})$			1,49		

fischer injection system FIS V Zero for masonry

Performances
Solid brick Mz, dimensions, installation parameters

Annex C4

Table C5.1: Characteristic resistance to pull-out failure or brick breakout failure of a single anchor under tension loading

Anchor rod	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E	-	-	-	-	M8	M10 M12
					11x85	15x85

Tension resistance $N_{Rk} = N_{Rk,p} = N_{Rk,b} = N_{Rk,p,c} = N_{Rk,b,c}$ [kN] depending on the normalised mean compressive strength f_b ; (temperature range 24/40°C)

Normalised mean compressive strength f_b	Effective anchorage depth h_{ef} [mm]								
	50	80	50	80	50	80	50	80	85
36 N/mm ²	2,5	3,0	3,0	3,0	3,0	3,0	3,0	4,5	2,5
48 N/mm ²	3,0	3,5	3,5	3,5	3,5	3,5	3,5	5,0	3,0

Tension resistance $N_{Rk} = N_{Rk,p} = N_{Rk,b} = N_{Rk,p,c} = N_{Rk,b,c}$ [kN] depending on the normalised mean compressive strength f_b (temperature range 50/80°C and 72/120°C)

Normalised mean compressive strength f_b	Effective anchorage depth h_{ef} [mm]								
	50	80	50	80	50	80	50	80	85
36 N/mm ²	1,5	2,0	2,0	2,0	2,0	2,0	2,0	3,5	1,5
48 N/mm ²	1,5	2,5	2,5	2,5	2,5	2,5	2,5	4,0	1,5

Table C5.2: Characteristic resistance to local brick failure or brick edge failure of a single anchor under shear loading

Anchor rod	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E	-	-	-	-	M8	M10 M12
					11x85	15x85

Shear resistance $V_{Rk} = V_{Rk,b} = V_{Rk,c,II} = V_{Rk,c,\perp}$ [kN] depending on the normalised mean compressive strength f_b ; (temperature range 24/40°C, 50/80°C and 72/120°C)

Normalised mean compressive strength f_b	Effective anchorage depth h_{ef} [mm]								
	50	80	50	80	50	80	50	80	85
36 N/mm ²	2,5	4,5	2,5	4,5	2,5	4,5	2,5	4,5	2,5
48 N/mm ²	3,0	5,0	3,0	5,0	3,0	5,0	3,0	5,0	3,0


Factor for job site tests see annex C20 and displacements see annex C21

fischer injection system FIS V Zero for masonry

Performances
Solid brick Mz, Characteristic resistance under tension and shear loading

Annex C5

Solid calcium silicate (sand-lime) brick KS, NF, EN 771-2: 2011+A1:2015

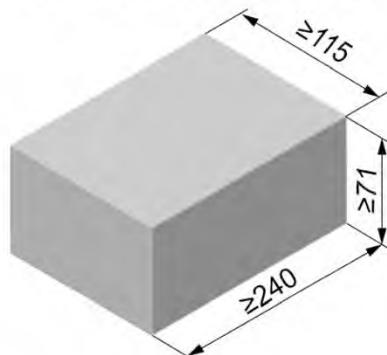

Solid calcium silicate (sand-lime) brick KS, NF, EN 771-2: 2011+A1:2015			
Producer	---		
Nominal dimensions [mm]	length L	width W	height H
≥ 240	≥ 115	≥ 71	---
Mean gross dry density [kg/dm ³]	≥ 2,0		
Normalised mean compressive strength [N/mm ²]	12 / 16 / 20		
Standard	EN 771-2: 2011+A1:2015		

Table C6.1: Installation parameters

Anchor rod	M8	M10	M12	M16	-	-						
Internal threaded anchor FIS E	-	-	-	-	M8	M10 M12						
Anchor rod and internal threaded anchor FIS E without perforated sleeve												
Effective anchorage depth h_{ef} [mm]	50	80	50	80	50	85						
Max. installation torque $\max T_{\text{inst}}$ [Nm]	8		10		8	10						
General installation parameters												
Edge distance $C_{\min} = C_{\text{cr}}$	[mm]	100										
$s_{\min \parallel}$		100										
$s_{\text{cr} \parallel}$		3 × h_{ef}										
$s_{\min \perp}$		100										
$s_{\text{cr} \perp}$		3 × h_{ef}										
Drilling method												
Hole drilling with rotary drill mode or hammer drilling with hard metal hammer drill												

Table C6.2: Group factors

Anchor rod	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E	-	-	-	-	M8	M10 M12
					11x85	15x85
Group factors	$\alpha_{g,N}(s_{\min \parallel})$	[-]	1,67			
	$\alpha_{g,V}(s_{\min \parallel})$		1,26			
	$\alpha_{g,N}(s_{\min \perp})$		1,67			
	$\alpha_{g,V}(s_{\min \perp})$		2,0			

fischer injection system FIS V Zero for masonry

Performances

Solid calcium silicate (sand-lime) brick KS, NF, dimensions, installation parameters

Annex C6

Solid calcium silicate (sand-lime) brick KS, NF, EN 771-2: 2011+A1:2015

Table C7.1: Characteristic resistance to pull-out failure or brick breakout failure of a single anchor under tension loading

Anchor rod	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E	-	-	-	-	M8	M10 M12
					11x85	15x85

Tension resistance $N_{Rk} = N_{Rk,p} = N_{Rk,b} = N_{Rk,p,c} = N_{Rk,b,c}$ [kN] depending on the normalised mean compressive strength f_b ; (temperature range 24/40°C)

Normalised mean compressive strength f_b	Effective anchorage depth h_{ef} [mm]									
	50	80	50	80	50	80	50	80	85	85
12 N/mm ²	2,0	2,0	2,5	4,5	2,0	4,5	2,0	2,0		2,0
16 N/mm ²	2,5	2,5	2,5	5,0	2,5	5,0	2,5	2,5		2,5
20 N/mm ²	2,5	3,0	3,0	6,0	2,5	6,0	2,5	3,0		2,5

Tension resistance $N_{Rk} = N_{Rk,p} = N_{Rk,b} = N_{Rk,p,c} = N_{Rk,b,c}$ [kN] depending on the normalised mean compressive strength f_b ; (temperature range 50/80°C and 72/120°C)

Normalised mean compressive strength f_b	Effective anchorage depth h_{ef} [mm]									
	50	80	50	80	50	80	50	80	85	85
12 N/mm ²	1,5	1,5	1,5	3,0	1,5	3,0	1,5	1,5		1,5
16 N/mm ²	1,5	1,5	2,0	3,5	1,5	3,5	1,5	1,5		1,5
20 N/mm ²	2,0	2,0	2,0	4,0	2,0	4,0	2,0	2,0		2,0

Table C7.2: Characteristic resistance to local brick failure or brick edge failure of a single anchor under shear loading

Anchor rod	M8	M10	M12	M16	-	-
Internal threaded anchor FIS E	-	-	-	-	M8	M10 M12
					11x85	15x85

Shear resistance $V_{Rk} = V_{Rk,b} = V_{Rk,c,II} = V_{Rk,c,\perp}$ [kN] depending on the normalised mean compressive strength f_b ; (temperature range 24/40°C, 50/80°C and 72/120°C)

Normalised mean compressive strength f_b	Effective anchorage depth h_{ef} [mm]									
	50	80	50	80	50	80	50	80	85	85
12 N/mm ²	3,5	3,5	4,5	4,5	3,5	4,0	3,5	4,0	3,5	3,5
16 N/mm ²	4,0	4,0	5,0	5,0	4,0	4,5	4,0	4,5	4,0	4,0
20 N/mm ²	4,5	4,5	6,0	6,0	4,5	5,0	4,5	5,0	4,5	4,5

Factor for job site tests see annex C20 and displacements see annex C21


fischer injection system FIS V Zero for masonry

Performances


Solid calcium silicate (sand-lime) brick KS, NF, Characteristic resistance under tension and shear loading

Annex C7

Perforated calcium silicate (sand-lime) brick KSL, 3DF, EN 771-2: 2011+A1:2015

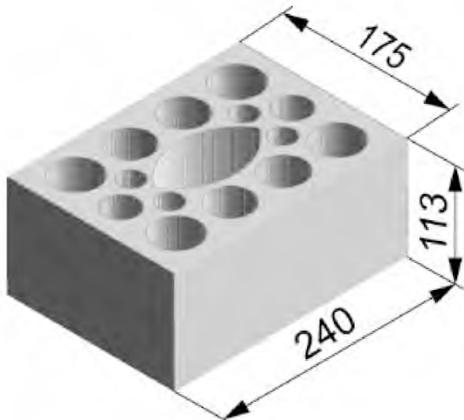

Perforated calcium silicate (sand-lime) brick KSL, 3DF, EN 771-2: 2011+A1:2015		
Producer	e.g. KS Wemding	
Nominal dimensions [mm]	length L	width W
	240	175
Mean gross dry density ρ [kg/dm ³]	$\geq 1,6$	
Normalised mean compressive strength [N/mm ²]	6 / 8 / 10 / 12 / 16	
Standard	EN 771-2: 2011+A1:2015	



Dimensions see
also Annex B12

Table C8.1: Installation parameters
(Pre-positioned installation with perforated sleeve FIS H K)

Anchor rod	M8	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	M8					M10	M12			
			11x85					15x85				

Perforated sleeve FIS H K

Perforated sleeve FIS H K	12x50	12x85	16x85	16x130	20x85	20x130
---------------------------	-------	-------	-------	--------	-------	--------

Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K

Max. installation torque	max T _{inst} [Nm]	8	8	8	8	10	8	10	10
--------------------------	----------------------------	---	---	---	---	----	---	----	----

General installation parameters

Edge distance	$c_{min} = c_{cr}$		100
	$s_{min \parallel}$		100
Spacing	$s_{cr \parallel}$	[mm]	240
	$s_{min \perp}$		100
	$s_{cr \perp}$		115

Drilling method

Hole drilling with rotary drill mode or hammer drilling with hard metal hammer drill

Table C8.2: Group factors

Anchor rod	M8	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	M8					M10	M12			
			11x85					15x85				
Perforated sleeve FIS H K	12x50	12x85	16x85	16x130		20x85		20x130				
Group factors	$\alpha_{g,N}(s_{min \parallel})$	[-]	1,14									
	$\alpha_{g,V}(s_{min \parallel})$		1,51									
	$\alpha_{g,N}(s_{min \perp})$		1,14									
	$\alpha_{g,V}(s_{min \perp})$		1,54									

fischer injection system FIS V Zero for masonry

Performances

Perforated calcium silicate (sand-lime) brick KSL, 3DF, dimensions, installation parameters

Annex C8

Perforated calcium silicate (sand-lime) brick KSL, 3DF, EN 771-2: 2011+A1:2015

Table C9.1: Installation parameters
(Push through installation with perforated sleeve FIS H K)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Anchor rod with perforated sleeve FIS H K			
Max. installation torque	max T_{inst} [Nm]		10
General installation parameters			
Edge distance $c_{min} = c_{cr}$		100	
$s_{min \parallel}$		100	
Spacing	$s_{cr \parallel}$ [mm]	240	
$s_{min \perp}$		100	
$s_{cr \perp}$		115	

Drilling method

Hole drilling with rotary drill mode or hammer drilling with hard metal hammer drill

Table C9.2: Group factors

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Group factors	$\alpha_{g,N} (s_{min \parallel})$	1,14	
	$\alpha_{g,V} (s_{min \parallel})$	1,51	
	$\alpha_{g,N} (s_{min \perp})$	1,14	
	$\alpha_{g,V} (s_{min \perp})$	1,54	

fischer injection system FIS V Zero for masonry

Performances

Perforated calcium silicate (sand-lime) brick KSL, 3DF, dimensions, installation parameters

Annex C9

Perforated calcium silicate (sand-lime) brick KSL, 3DF, EN 771-2: 2011+A1:2015
Table C10.1: Characteristic resistance to pull-out failure or brick breakout failure of a single anchor under tension loading (Pre-positioned installation)

Anchor rod	M8	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	M8	11x85	-	-	M10	M12	-	15x85	-	-
Perforated sleeve FIS H K	12x50	12x85		16x85		16x130		20x85		20x130		

Tension resistance $N_{Rk} = N_{Rk,p} = N_{Rk,b} = N_{Rk,p,c} = N_{Rk,b,c}$ [kN] depending on the normalised mean compressive strength f_b ; (temperature range 24/40°C)

Norm. mean compressive strength f_b						
6 N/mm²	1,2	0,9	2,0	0,9	2,0	
8 N/mm²	1,5	1,2	2,5	1,2	2,5	
10 N/mm²	1,5	1,5	3,0	1,5	3,0	
12 N/mm²	2,0	1,5	3,5	1,5	3,5	
16 N/mm²	2,5	2,0	4,5	2,0	4,5	

Tension resistance $N_{Rk} = N_{Rk,p} = N_{Rk,b} = N_{Rk,p,c} = N_{Rk,b,c}$ [kN] depending on the normalised mean compressive strength f_b ; (temperature range 50/80°C and 72/120°C)

Norm. mean compressive strength f_b						
6 N/mm²	0,6	0,75	1,5	0,75	1,5	
8 N/mm²	0,75	0,9	2,0	0,9	2,0	
10 N/mm²	0,9	0,9	2,5	0,9	2,5	
12 N/mm²	0,9	1,2	2,5	1,2	2,5	
16 N/mm²	1,2	1,5	3,5	1,5	3,5	

Table C10.2: Characteristic resistance to pull-out failure or brick breakout failure of a single anchor under tension loading (Push through installation)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K		18x130/200	22x130/200

Tension resistance $N_{Rk} = N_{Rk,p} = N_{Rk,b} = N_{Rk,p,c} = N_{Rk,b,c}$ [kN] depending on the normalised mean compressive strength f_b ; (temperature range 24/40°C)

Norm. mean compressive strength f_b						
6 N/mm²		2,0				
8 N/mm²		2,5				
10 N/mm²		3,0				
12 N/mm²		3,5				
16 N/mm²		4,5				

Tension resistance $N_{Rk} = N_{Rk,p} = N_{Rk,b} = N_{Rk,p,c} = N_{Rk,b,c}$ [kN] depending on the normalised mean compressive strength f_b ; (temperature range 50/80°C and 72/120°C)

Norm. mean compressive strength f_b						
6 N/mm²		1,5				
8 N/mm²		2,0				
10 N/mm²		2,5				
12 N/mm²		2,5				
16 N/mm²		3,5				

Factor for job site tests see annex C20 and displacements see annex C21

fischer injection system FIS V Zero for masonry	Annex C10
Performances Perforated calcium silicate (sand-lime) brick KSL, 3DF, Characteristic resistance under tension loading	

Perforated calcium silicate (sand-lime) brick KSL, 3DF, EN 771-2: 2011+A1:2015
Table C11.1: Characteristic resistance to local brick failure or brick edge failure of a single anchor under shear loading (Pre-positioned installation)

Anchor rod	M8	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	M8	11x85	-	-	-	M10	M12	-	-	-
								15x85				
Perforated sleeve FIS H K	12x50	12x85		16x85		16x130		20x85		20x130		
Shear resistance $V_{Rk} = V_{Rk,b} = V_{Rk,c,II} = V_{Rk,c,\perp}$ [kN] depending on the normalised mean compressive strength f_b; (temperature range 24/40°C, 50/80°C and 72/120°C)												
Normalised mean compressive strength f_b												
6 N/mm ²		1,5			2,0				3,0			
8 N/mm ²			2,0			2,5			3,5			
10 N/mm ²			2,5			3,0			4,5			
12 N/mm ²			2,5			3,5			5,0			
16 N/mm ²			3,5			4,0			6,5			

Table C11.2: Characteristic resistance to local brick failure or brick edge failure of a single anchor under shear loading (Push through installation)

Anchor rod	M10	M12	M16
Perforated sleeve FIS H K	18x130/200		22x130/200
Shear resistance $V_{Rk} = V_{Rk,b} = V_{Rk,c,II} = V_{Rk,c,\perp}$ [kN] depending on the normalised mean compressive strength f_b; (temperature range 24/40°C, 50/80°C and 72/120°C)			
Normalised mean compressive strength f_b			
6 N/mm ²		2,0	
8 N/mm ²		2,5	
10 N/mm ²		3,0	
12 N/mm ²		3,5	
16 N/mm ²		4,0	

Factor for job site tests see annex C20 and displacements see annex C21


fischer injection system FIS V Zero for masonry

Performances


Perforated calcium silicate (sand-lime) brick KSL, 3DF, Characteristic resistance under shear loading

Annex C11

Vertical perforated brick HLz, EN 771-1: 2011+A1:2015

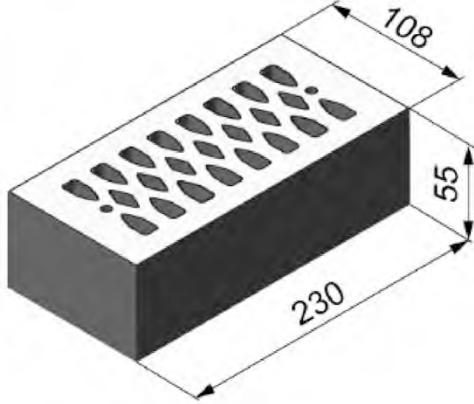

Vertical perforated brick HLz, EN 771-1: 2011+A1:2015		
Producer	e.g. Wienerberger.	
Nominal dimensions [mm]	length L	width W
230	108	55
Mean gross dry density ρ [kg/dm ³]		$\geq 1,6$
Normalised mean compressive strength [N/mm ²]		8 / 10 / 12 / 16
Standard	EN 771-1: 2011+A1:2015	

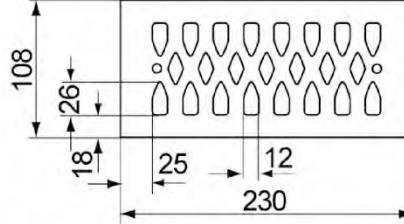

Dimensions see also Annex B12

Table C12.1: Installation parameters

Anchor rod	M8	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-		M8				M10	M12			
				11x85				15x85				
Perforated sleeve FIS H K	12x50	12x85		16x85		16x130		20x85		20x130		

Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K

Max. installation torque	max T _{inst} [Nm]	5
--------------------------	----------------------------	---

General installation parameters

Edge distance	C _{min} = C _{cr}	[mm]	100
	s _{min II}		100
Spacing	s _{cr II}		230
	s _{min ⊥}		60
	s _{cr ⊥}		60

Drilling method

Hole drilling with rotary drill mode or hammer drilling with hard metal hammer drill

Table C12.2: Group factors

Anchor rod	M8	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-		M8				M10	M12			
				11x85				15x85				
Perforated sleeve FIS H K	12x50	12x85		16x85		16x130		20x85		20x130		
Group factors	$\alpha_{g,N}$ (s _{min II})	[-]						1,65				
	$\alpha_{g,V}$ (s _{min II})							1,64				
	$\alpha_{g,N}$ (s _{min ⊥})							1,65				
	$\alpha_{g,V}$ (s _{min ⊥})							2,00				

fischer injection system FIS V Zero for masonry

Performances

Vertical perforated brick HLz, dimensions, installation parameters

Annex C12

Table C13.1: Characteristic resistance to pull-out failure or brick breakout failure of a single anchor under tension loading

Anchor rod	M8	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	M8 11x85	-	-	-	-	M10 15x85	M12	-	-	-
Perforated sleeve FIS H K	12x50	12x85		16x85		16x130		20x85		20x130		

Tension resistance $N_{Rk} = N_{Rk,p} = N_{Rk,b} = N_{Rk,p,c} = N_{Rk,b,c}$ [kN] depending on the normalised mean compressive strength f_b ; (temperature range 24/40°C)

Normalised mean compressive strength f_b						
8 N/mm ²	1,2	1,5	1,5	2,5	1,5	2,5
10 N/mm ²	1,2	2,0	2,0	2,5	2,0	2,5
12 N/mm ²	1,5	2,0	2,0	3,0	2,0	3,0
16 N/mm ²	1,5	2,5	2,5	3,5	2,5	3,5

Tension resistance $N_{Rk} = N_{Rk,p} = N_{Rk,b} = N_{Rk,p,c} = N_{Rk,b,c}$ [kN] depending on the normalised mean compressive strength f_b ; (temperature range 50/80°C and 72/120°C)

Normalised mean compressive strength f_b						
8 N/mm ²	0,6	1,2	1,2	1,5	1,2	1,5
10 N/mm ²	0,75	1,2	1,2	2,0	1,2	2,0
12 N/mm ²	0,75	1,5	1,5	2,0	1,5	2,0
16 N/mm ²	0,9	1,5	1,5	2,5	1,5	2,5

Table C13.2: Characteristic resistance to local brick failure or brick edge failure of a single anchor under shear loading

Anchor rod	M8	M8	-	M8	M10	M8	M10	-	M12	M16	M12	M16
Internal threaded anchor FIS E	-	-	M8 11x85	-	-	-	-	M10 15x85	M12	-	-	-
Perforated sleeve FIS H K	12x50	12x85		16x85		16x130		20x85		20x130		


Shear resistance $V_{Rk} = V_{Rk,b} = V_{Rk,c,II} = V_{Rk,c,\perp}$ [kN] depending on the normalised mean compressive strength f_b ; (temperature range 24/40°C, 50/80°C and 72/120°C)

Normalised mean compressive strength f_b						
8 N/mm ²	2,0	3,5	2,5	3,5	2,5	3,5
10 N/mm ²	2,0	4,0	3,0	4,0	3,0	4,0
12 N/mm ²	2,0	4,0	3,0	4,5	3,0	4,5
16 N/mm ²	2,5	5,0	3,5	5,0	3,5	5,0


Factor for job site tests see annex C20 and displacements see annex C21

fischer injection system FIS V Zero for masonry	Annex C13
Performances Vertical perforated brick HLz, Characteristic resistance under tension and shear loading	

Lightweight aggregate concrete hollow block Hbl , EN 771-3: 2011+A1:2015

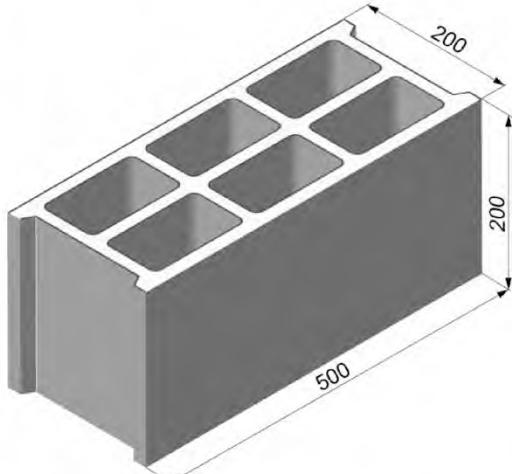

Lightweight aggregate concrete hollow block Hbl, EN 771-3: 2011+A1:2015		
Producer	e.g. Sepa	
Nominal dimensions [mm]	length L	width W
	500	200
Mean gross dry density ρ [kg/dm ³]	$\geq 1,0$	
Normalised mean compressive strength [N/mm ²]	2 / 4	
Standard	EN 771-1: 2011+A1:2015	

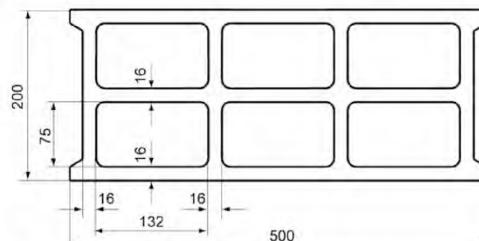

Dimensions see also Annex B12

Table C14.1: Installation parameters

Anchor rod	-	M8	M10	M8	M10	M10	M12	-	M12	M16	M12	M16
Internal threaded anchor FIS E	M8	-	-	-	-	-	-	M10	M12	-	-	-
	11x85							15x85	15x85			
Perforated sleeve FIS H K	16x85		16x130		18x130/200		20x85		20x130			

Anchor rod and internal threaded anchor FIS E with perforated sleeve FIS H K

Max. installation torque	max T _{inst} [Nm]	2
--------------------------	----------------------------	---

General installation parameters

Edge distance	C _{min} = C _{cr}	[mm]	100
	s _{min} II		100
Spacing	s _{cr} II		500
	s _{min} \perp		100
	s _{cr} \perp		200

Drilling method

Hole drilling with rotary drill mode or hammer drilling with hard metal hammer drill

Table C14.2: Group factors

Anchor rod	-	M8	M10	M8	M10	M10	M12	-	M12	M16	M12	M16												
Internal threaded anchor FIS E	M8	-	-	-	-	-	-	M10	M12	-	-	-												
	11x85							15x85	15x85															
Perforated sleeve FIS H K	16x85		16x130		18x130/200		20x85		20x130															
Group factors	$\alpha_{g,N}$ (s _{min} II)	[-]	2,00																					
	$\alpha_{g,V}$ (s _{min} II)		1,28																					
	$\alpha_{g,N}$ (s _{min} \perp)		1,40																					
	$\alpha_{g,V}$ (s _{min} \perp)		2,00																					

fischer injection system FIS V Zero for masonry

Performances

Lightweight aggregate concrete hollow block Hbl, dimensions, installation parameters

Annex C14

Lightweight aggregate concrete hollow block Hbl, EN 771-3: 2011+A1:2015

Table C15.1: Characteristic resistance to pull-out failure or brick breakout failure of a single anchor under tension loading

Anchor rod	-	M8	M10	M8	M10	M10	M12	-	M12	M16	M12	M16
Internal threaded anchor FIS E	M8	-	-	-	-	-	-	M10	M12	-	-	-
	11x85							15x85				
Perforated sleeve FIS H K	16x85			16x130		18x130/200		20x85			20x130	

Tension resistance $N_{Rk} = N_{Rk,p} = N_{Rk,b} = N_{Rk,p,c} = N_{Rk,b,c}$ [kN] depending on the normalised mean compressive strength f_b ; (temperature range 24/40°C)

Normalised mean compressive strength f_b			
2 N/mm ²	0,4		0,6
4 N/mm ²	0,5		0,75

Tension resistance $N_{Rk} = N_{Rk,p} = N_{Rk,b} = N_{Rk,p,c} = N_{Rk,b,c}$ [kN] depending on the normalised mean compressive strength f_b ; (temperature range 50/80°C and 72/120°C)

Normalised mean compressive strength f_b			
2 N/mm ²	0,3		0,5
4 N/mm ²	0,4		0,6

Table C15.2: Characteristic resistance to local brick failure or brick edge failure of a single anchor under shear loading

Anchor rod	-	M8	M10	M8	M10	M10	M12	-	M12	M16	M12	M16
Internal threaded anchor FIS E	M8	-	-	-	-	-	-	M10	M12	-	-	-
	11x85							15x85				
Perforated sleeve FIS H K	16x85			16x130		18x130/200		20x85			20x130	

Shear resistance $V_{Rk} = V_{Rk,b} = V_{Rk,c,II} = V_{Rk,c,\perp}$ [kN] depending on the normalised mean compressive strength f_b ; (temperature range 24/40°C, 50/80°C and 72/120°C)

Normalised mean compressive strength f_b			
2 N/mm ²	1,5		
4 N/mm ²	2,0		

Factor for job site tests see annex C20 and displacements see annex C21

fischer injection system FIS V Zero for masonry

Performances

Lightweight aggregate concrete hollow block Hbl
Characteristic resistance under tension and shear loading

Annex C15

Autoclaved aerated concrete (cylindrical drill hole), EN 771-4:2011+A1:2015



Producer	e.g. Ytong		
Mean gross dry density ρ	[kg/dm ³]	0,35	0,5
Mean compressive strength / Min. compressive strength single brick ¹⁾	[N/mm ²]	2,5 / 2	5 / 4
Standard or annex	EN 771-4:2011+A1:2015		

Table C16.1: Installation parameters

Anchor rod	M8	M10	M12	M16
Internal threaded anchor FIS E	-	-	-	-
Anchor rod and internal threaded anchor FIS E without perforated sleeve				
Effective anchorage depth h_{ef} [mm]	100	100	100	100
Max. installation torque $\max T_{\text{inst}}$ [Nm]	2	2	2	2
General installation parameters				
Edge distance c_{\min}		100		
	c_{cr}		250	
	$s_{\text{cr II}}$		250	
Spacing	$s_{\min \text{ II}}$		100	
	$s_{\text{cr I}}$		250	
	$s_{\min \text{ I}}$		100	

Drilling method

Hammer drilling with hard metal hammer drill

- ¹⁾ The compressive strength of the single brick must not be less than 80% of the mean compressive strength.

fischer injection system FIS V Zero for masonry

Performance

Autoclaved aerated concrete (cylindrical drill hole), dimensions, installation parameters

Annex C16

Table C17.1: Group factors for autoclaved aerated concrete
(Min. compressive strength single brick 2 N/mm²)

Anchor rod		M8	M10	M12	M16
Group factors	$\alpha_{g,N} \parallel, (s_{min} \parallel)$	[-]	1,13		
	$\alpha_{g,N} \perp, (s_{min} \perp)$		1,20		
	$\alpha_{g,V}, (s_{min} \parallel)$		1,39		
	$\alpha_{g,V}, (s_{min} \perp)$		1,17		

Table C17.2: Group factors for autoclaved aerated concrete
(Min. compressive strength single brick 4 N/mm²)

Anchor rod		M8	M10	M12	M16
Group factors	$\alpha_{g,N} \parallel, (s_{min} \parallel)$	[-]	1,13		
	$\alpha_{g,N} \perp, (s_{min} \perp)$		1,20		
	$\alpha_{g,V}, (s_{min} \parallel)$		1,39		
	$\alpha_{g,V}, (s_{min} \perp)$		1,17		

Table C17.3: Group factors for autoclaved aerated concrete
(Min. compressive strength single brick 6 N/mm²)

Anchor rod		M8	M10	M12	M16
Group factors	$\alpha_{g,N} \parallel, (s_{min} \parallel)$	[-]	1,13		
	$\alpha_{g,N} \perp, (s_{min} \perp)$		1,20		
	$\alpha_{g,V}, (s_{min} \parallel)$		1,39		
	$\alpha_{g,V}, (s_{min} \perp)$		1,17		

fischer injection system FIS V Zero for masonry

Performance
Autoclaved aerated concrete (cylindrical drill hole), Group factors

Annex C17

Autoclaved aerated concrete (cylindrical drill hole), EN 771-4:2011+A1:2015

Table C18.1: Characteristic resistance to pull-out failure or brick breakout failure of a single anchor under tension loading

Anchor rod		M8	M10	M12	M16
Tension resistance $N_{Rk} = N_{Rk,p} = N_{Rk,b} = N_{Rk,p,c} = N_{Rk,b,c}$ [kN] depending on the mean compressive strength / Min. compressive strength single brick; (temperature range 24/40°)					
Mean compressive strength / Min. compressive strength single brick ¹⁾	Use conditions		Effective anchorage depth h_{ef} [mm]		
		100	100	100	100
2,5 / 2 N/mm ²	d/d	1,2	1,2	1,2	1,5
5 / 4 N/mm ²	d/d	1,2	1,2	1,2	1,5
8 / 6 N/mm ²	d/d	1,2	1,2	1,2	1,5

Anchor rod		M8	M10	M12	M16
Tension resistance $N_{Rk} = N_{Rk,p} = N_{Rk,b} = N_{Rk,p,c} = N_{Rk,b,c}$ [kN] depending on the mean compressive strength / Min. compressive strength single brick; (temperature range 50/80°C)					
Mean compressive strength / Min. compressive strength single brick ¹⁾	Use conditions		Effective anchorage depth h_{ef} [mm]		
		100	100	100	100
2,5 / 2 N/mm ²	d/d	0,9	0,9	1,2	1,5
5 / 4 N/mm ²	d/d	0,9	0,9	1,2	1,5
8 / 6 N/mm ²	d/d	0,9	0,9	1,2	1,5

¹⁾ The compressive strength of the single brick must not be less than 80% of the mean compressive strength.

fischer injection system FIS V Zero for masonry

Performance

Autoclaved aerated concrete (cylindrical drill hole),
Characteristic resistance under tension loading

Annex C18

Appendix 39 / 42

Table C19.1: Characteristic resistance to local brick failure or brick edge failure of a single anchor under shear loading

Anchor rod		M8	M10	M12	M16
Internal threaded anchor FIS E		-	-	-	-
Shear resistance $V_{Rk} = V_{Rk,b} = V_{Rk,c,II} = V_{Rk,c,\perp}$ [kN] depending on the mean compressive strength / Min. compressive strength single brick; (temperature range 24/40°C and 50/80°C) $c_{min} \geq 100\text{mm}$					
Mean compressive strength / Min. compressive strength single brick ¹⁾	Use conditions		Effective anchorage depth h_{ef} [mm]		
2,5 / 2 N/mm ²	d/d	100	100	100	100
5 / 4 N/mm ²	d/d	1,2	1,2	1,2	1,2
8 / 6 N/mm ²	d/d	1,2	1,2	1,2	1,2

Anchor rod		M8	M10	M12	M16
Internal threaded anchor FIS E		-	-	-	-
Shear resistance $V_{Rk} = V_{Rk,b} = V_{Rk,c,II} = V_{Rk,c,\perp}$ [kN] depending on the mean compressive strength / Min. compressive strength single brick; (temperature range 24/40°C and 50/80°C) $c_{cr} > 250\text{mm}$					

Mean compressive strength / Min. compressive strength single brick ¹⁾	Use conditions		Effective anchorage depth h_{ef} [mm]		
2,5 / 2 N/mm ²	d/d	100	100	100	100
5 / 4 N/mm ²	d/d	2,5	2,5	2,5	2,5
8 / 6 N/mm ²	d/d	2,5	2,5	2,5	2,5

¹⁾ The compressive strength of the single brick must not be less than 80% of the mean compressive strength.

Factor for job site tests see annex C20, table C20.2 and displacements see annex C 21

fischer injection system FIS V Zero for masonry	Annex C19
Performance Autoclaved aerated concrete (cylindrical drill hole), Characteristic resistance under shear loading	

β-factors for job site tests

Table C20.1: β-factors for job site tests

Installation and use conditions	d/d		
temperature range [°C]	24/40	50/80	72/120
M8	0,81	0,47	0,45
M10	0,62	0,49	0,45
M12 / FIS E 11x85	0,62	0,49	0,52
M16 / FIS E 15x85	0,56	0,45	0,57

Table C20.2: β-factors for job site tests for AAC

Installation and use conditions	d/d	
temperature range [°C]	24/40	50/80
All sizes	0,58	0,49

fischer injection system FIS V Zero for masonry

Performances
β-factors for job site tests

Annex C20

Appendix 41 / 42

Table C21.1: Displacements

Material	Size	Effective anchorage depth [mm]	N [kN]	δN_0 [mm]	δN_∞ [mm]	V [kN]	δV_0 [mm]	δV_∞ [mm]
Solid brick acc. to C4-C5	M8	50	0,57	0,00	0,00	0,71	0,08	0,12
		80	1,00	0,00	0,00	1,71	0,32	0,48
	M10	50	0,57	0,00	0,00	0,71	0,18	0,27
		80	1,00	0,01	0,02	1,71	0,50	0,75
	M12	50	1,29	0,03	0,06	0,71	0,05	0,08
		80	1,00	0,01	0,02	1,71	0,75	1,13
	M16	50	1,29	0,03	0,06	0,71	0,35	0,53
		80	1,71	0,04	0,08	1,71	0,20	0,30
Solid calcium silicate (sand-lime) brick acc. to C6-C7	M8	50	0,86	0,03	0,06	1,43	0,32	0,48
		80	0,86	0,00	0,00	1,43		
	M10	50	0,86	0,00	0,00	1,43	0,34	0,51
		80	1,71	0,02	0,04	1,43		
	M12	50	0,86	0,03	0,06	1,43	0,12	0,18
		80	1,71	0,04	0,08	1,43	0,32	0,48
	M16	50	0,86	0,03	0,06	1,43	0,57	0,86
		80	1,14	0,02	0,04	1,43	0,20	0,03
Perforated calcium silicate (sand-lime) brick acc. to C8-C11	M8	12x50	0,71	0,01	0,02	1,00	0,16	0,24
		12x85				1,14	0,57	0,86
	M8	16x85	0,57	0,02	0,04	1,14	1,03	1,55
	M10	16x130	1,29	0,06	0,12	1,86	1,15	1,73
	M12	20x85	0,57	0,03	0,06	1,86	1,24	1,86
	M16	20x130	1,29	0,04	0,08			
	M8	12x50	0,43	0,00	0,00	0,71	0,25	0,38
		12x85	0,71	0,00	0,00	1,43	0,61	0,92
	M8	16x85	0,71	0,03	0,06	1,00	0,36	0,54
		16x130	1,00	0,02	0,04	1,43	0,30	0,45
Perforated brick Hz acc. to C12-C13	M12	20x85	0,71	0,00	0,00	1,00	0,22	0,33
		20x130	1,00	0,04	0,08	1,43	0,17	0,26
	M8	16x85	0,14	0,03	0,06	0,57	1,54	2,31
		16x130	0,14	0,02	0,04	0,57	1,01	1,52
	M10	20x85	0,14	0,06	0,12	0,57	1,31	1,97
		20x130	0,21	0,04	0,08	0,57	0,82	1,23
	M12	M8x100	0,48	0,08	0,16	0,89	1,49	2,24
		M10x100	0,49	0,09	0,18	0,89	1,49	2,24
		M16x100	0,65	0,12	0,24	0,89	1,49	2,24

fischer injection system FIS V Zero for masonry

Performances
displacements

Annex C21