

DICHIARAZIONE DI PRESTAZIONE

DoP 0319

per il Sistema a Iniezione fischer FIS P Plus (ancorante chimico per l'utilizzo nel calcestruzzo)

IT

1. Codice di identificazione unico del prodotto-tipo: **DoP 0319**
2. Usi previsti: **Fissaggio post-installato in calcestruzzo non fessurato, vedi appendice, in particolare gli allegati da B1 - B7.**
3. Fabbricante: **fischerwerke GmbH & Co. KG, Otto-Hahn-Straße 15, 79211 Denzlingen, Germany**
4. Mandatario: **-**
5. Sistemi di VVCP: **1**
6. Documento per la valutazione europea: **EAD 330499-00-0601**
Valutazione tecnica europea: **ETA-18/0383; 2018-09-06**
Organismo di valutazione tecnica: **DIBt- Deutsches Institut für Bautechnik**
Organismi notificati: **2873 TU Darmstadt**
7. Prestazioni dichiarate:
Resistenza meccanica e stabilità (BWR 1)
Resistenza caratteristica al carico di tensione (carico statico e quasi-statico):
Resistenza alla rottura dell'acciaio: Allegato C1
Resistenza alla rottura del calcestruzzo combinata con sfilamento: Allegato C3
Resistenza alla rottura del cono di calcestruzzo: Allegato C2
Distanza dal bordo per evitare lo splitting sotto carico: Allegato C2
Robustezza: Allegati C2, C3
Massima coppia di installazione: Allegato B3
Distanza dal bordo e interassi minimi: Allegato B3

Resistenza caratteristica al carico di taglio (carico statico e quasi statico):
Resistenza alla rottura dell'acciaio: Allegato C1
Resistenza alla rottura per pry-out: Allegato C2
Resistenza alla rottura del bordo di calcestruzzo: Allegato C2

Spostamenti con carichi a breve e a lungo termine:
Spostamenti con carichi a breve e a lungo termine: Allegato C3

Resistenza e spostamenti caratteristici per le categorie di prestazione sismica C1 e C2:
Resistenza alla rottura dell'acciaio: NPD
Resistenza alla rottura per sfilamento: NPD
Allungamento a rottura: NPD
Fattore spazio anulare: NPD
Spostamenti: NPD

Igiene, salute e ambiente (BWR 3)
Contenuto, emissione e/o rilascio di sostanze pericolose: NPD
8. Documentazione tecnica appropriata e/o documentazione tecnica specifica: **-**

$k_{cr,N} = \text{NPD}$

La prestazione del prodotto sopra identificato è conforme all'insieme delle prestazioni dichiarate. La presente dichiarazione di prestazione è emessa, in conformità al regolamento (UE) n. 305/2011, sotto la sola responsabilità del fabbricante sopra identificato.

Firmato a nome e per conto del fabbricante da:



Dr.-Ing. Oliver Geibig, Direttore Generale Unità di Business & Engineering
Tumlingen, 2024-01-21

Jürgen Grün, Direttore Generale Chimica & Qualità

Questa Dichiarazione di Prestazione (DoP) è stata preparata in varie lingue. In caso di contestazioni sull'interpretazione, prevarrà sempre la versione inglese.

L'Appendice include informazioni volontarie e complementari in lingua inglese che superano i requisiti di legge (lingua specificata in modo neutrale).

Specific Part

1 Technical description of the product

The fischer injection system FIS P Plus is a bonded anchor consisting of a cartridge with injection mortar fischer FIS P Plus and a steel element according to Annex A 3.

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between metal part, injection mortar and concrete.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

| Essential characteristic | Performance |
|---|--------------------------|
| Characteristic resistance to tension load (static and quasi-static loading) | See Annex C 1 to C 3 |
| Characteristic resistance to shear load (static and quasi-static loading) | See Annex C 1 and C 2 |
| Displacements (static and quasi-static loading) | See Annex C 3 |
| Characteristic resistance and displacements for seismic performance categories C1 and C2 | No performance assessed |

3.2 Hygiene, health and the environment (BWR 3)

| Essential characteristic | Performance |
|--|-------------------------|
| Content, emission and/or release of dangerous substances | No performance assessed |

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base


In accordance with the European Assessment Document EAD 330499-00-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1


Installation conditions part 1

fischer anchor rod


Pre positioned installation

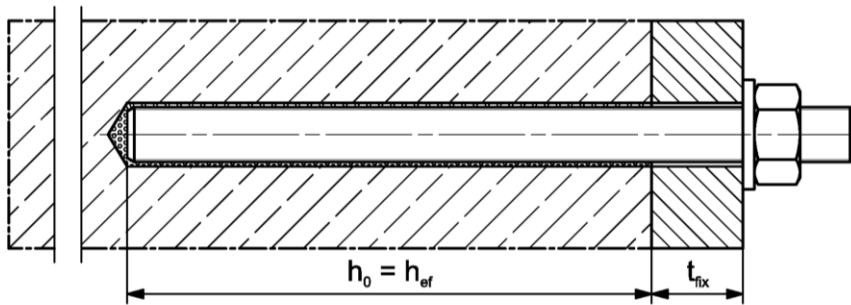

Push through installation (annular gap filled with mortar)

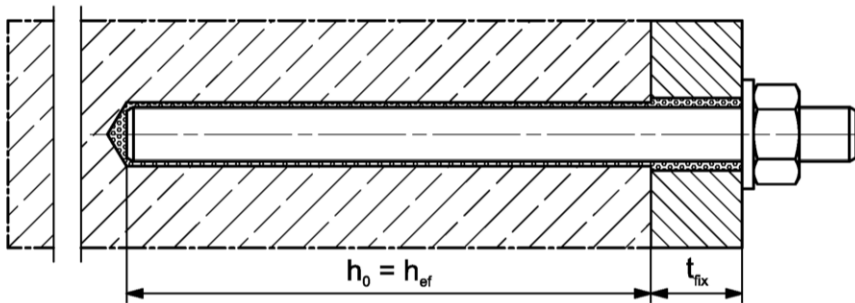

Pre-positioned or push through installation with subsequently pressed filling disk (annular gap filled with mortar)

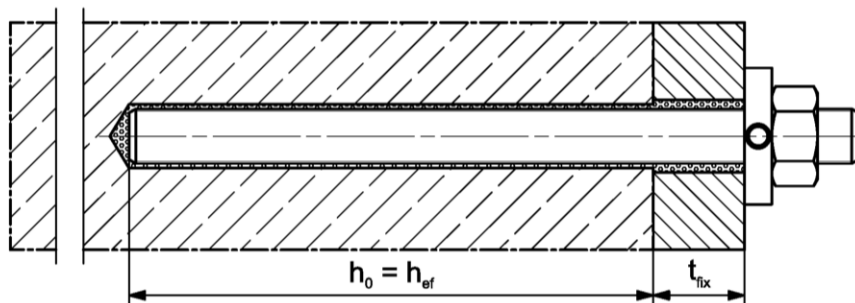

Figures not to scale

h_0 = drill hole depth

h_{ef} = effective embedment depth

t_{fix} = thickness of fixture

fischer injection system FIS P Plus


Product description
Installation conditions part 1

Annex A 1


Appendix 2 / 15

Overview system components part 1


Injection cartridge (shuttle cartridge) with sealing cap; Size: 345 ml, 360 ml, 390 ml, 550 ml, 950 ml, 1500 ml

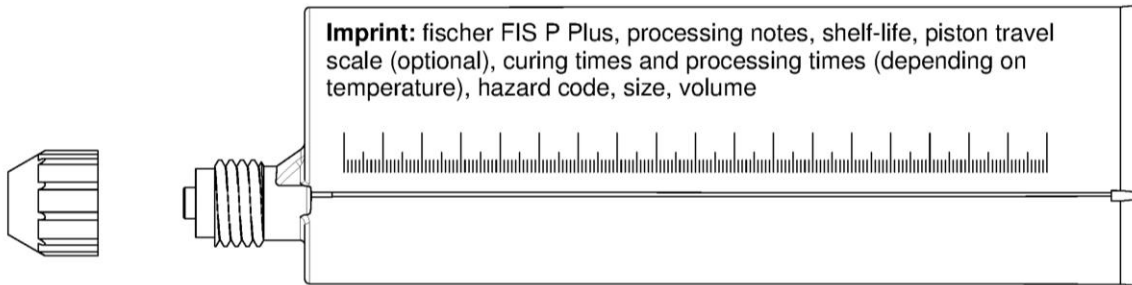

Injection cartridge (coaxial cartridge) with sealing cap; Size: 100 ml, 150 ml, 300 ml, 380 ml, 400 ml, 410 ml

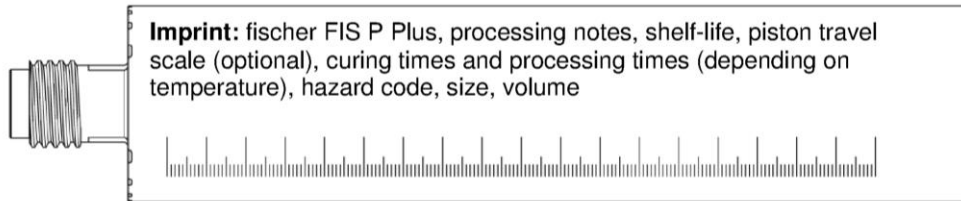

Static mixer FIS MR Plus or UMR

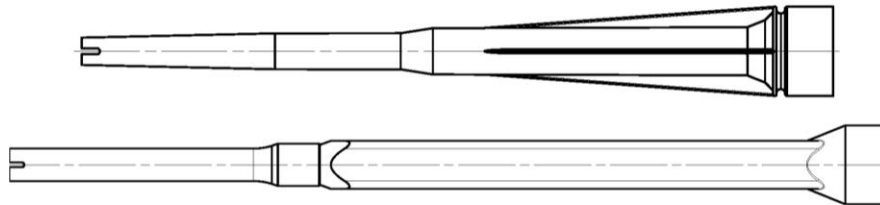

Injection adapter and Extension tube for static mixer



Cleaning brush BS / BSB



Blow-out pump ABG or ABP



Figures not to scale

fischer injection system FIS P Plus

System description

Overview system components part 1;
cartridges / static mixer / accessories


Annex A 2

Appendix 3 / 15


Overview system components part 2

fischer anchor rod


Size: M8, M10, M12, M16, M20 ,M24



washer / hexagon nut



fischer filling disk FFD with injection adapter

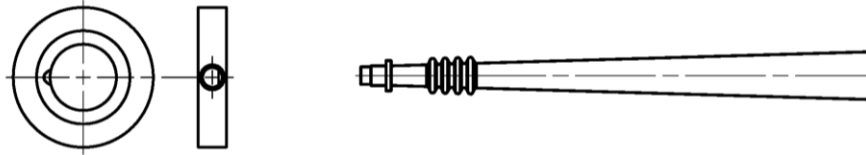

Figures not to scale

fischer injection system FIS P Plus

System description

Overview system components part 2;
steel components

Annex A 3

Appendix 4 / 15

Table A4.1: Materials

| Part | Designation | Material | | |
|------|--|--|--|--|
| 1 | Injection cartridge | Mortar, hardener, filler | | |
| | Steel grade | Steel, zinc plated | Stainless steel A4 | High corrosion resistant steel C |
| 2 | Anchor rod | Property class 5.8 or 8.8; EN ISO 898-1:2013 zinc plated $\geq 5 \mu\text{m}$, EN ISO 4042:1999 A2K or hot-dip galvanized $\geq 40 \mu\text{m}$ EN ISO 10684:2004 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ fracture elongation | Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4062, 1.4662, 1.4462; EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ fracture elongation | Property class 50 or 80 EN ISO 3506-1:2009 or property class 70 with $f_{yk} = 560 \text{ N/mm}^2$ 1.4565; 1.4529; EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ fracture elongation |
| 3 | Washer ISO 7089:2000 | zinc plated $\geq 5 \mu\text{m}$, EN ISO 4042:1999 A2K or hot-dip galvanized $\geq 40 \mu\text{m}$ EN ISO 10684:2004 | 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014 | 1.4565; 1.4529; EN 10088-1:2014 |
| 4 | Hexagon nut | Property class 5 or 8; EN ISO 898-2:2012 zinc plated $\geq 5 \mu\text{m}$, ISO 4042:1999 A2K or hot-dip galvanized $\geq 40 \mu\text{m}$ EN ISO 10684:2004 | Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014 | Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014 |
| 5 | fischer filling disk FFD similar to DIN 6319-G | zinc plated $\geq 5 \mu\text{m}$, EN ISO 4042:1999 A2K or hot-dip galvanized $\geq 40 \mu\text{m}$ EN ISO 10684:2004 | 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; EN 10088-1:2014 | 1.4565; 1.4529; EN 10088-1:2014 |




fischer injection system FIS P Plus

Product description
 Materials
Annex A 4

Appendix 5 / 15

Specifications of intended use (part 1)

Table B1.1: Overview use and performance categories

| | | | |
|---|---|--|---|
| Anchorages subject to | | FIS P Plus with ... | |
| | | Anchor rod  | |
| Hammer drilling with standard drill bit |  | all sizes | |
| Hammer drilling with hollow drill bit (Heller "Duster Expert"; Bosch „Speed Clean“; Hilti "TE-CD, TE-YD") |  | Nominal drill bit diameter (d_0) 12 mm to 28 mm | |
| Static and quasi static load, in | uncracked concrete | all sizes | Tables: C1.1 C2.1 C3.1 C3.2 |
| Use category | I1 | dry or wet concrete | all sizes |
| | I2 | Flooded hole | M12 to M24 |
| Installation direction | | D3 (downward and horizontal and upwards (e.g. overhead) installation) | |
| Installation temperature | | $T_{i,min} = 0\text{ °C}$ to $T_{i,max} = +40\text{ °C}$ | |
| In-service temperature | Temperature range I | -40 °C to +40 °C | (max. short term temperature +40 °C ; max. long term temperature +24 °C) |
| | Temperature range II | -40 °C to +80 °C | (max. short term temperature +80 °C ; max. long term temperature +50 °C) |

fischer injection system FIS P Plus

Intended use
Specifications (part 1)

Annex B 1

Appendix 6 / 15

Specifications of intended use (part 2)

Base materials:

- Compacted reinforced or unreinforced normal weight concrete without fibres of strength classes C20/25 to C50/60 according to EN 206:2013

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc coated steel, stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure, to permanently damp internal conditions or in other particular aggressive conditions (high corrosion resistant steel)

Note: Particular aggressive conditions are e. g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e. g. in desulphurization plants or road tunnels where de-icing materials are used)

Design:

- Anchorages have to be designed by a responsible engineer with experience of concrete anchor design.
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.)
- Anchorages are designed in accordance with FprEN 1992-4:2017 and EOTA Technical Report TR 055

Installation:

- Anchor installation is to be carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- In case of aborted hole: The hole shall be filled with mortar
- Anchorage depth should be marked and adhered to on installation
- Overhead installation is allowed

fischer injection system FIS P Plus

Intended use
Specifications (part 2)


Annex B 2

Appendix 7 / 15

Table B3.1: Installation parameters plus minimum spacing and minimum edge distance for anchor rods

| Anchor rods | | Thread | M8 | M10 | M12 | M16 | M20 | M24 |
|---|---|--------|--------------------------------------|-----|-----|-----------------|-----|-----|
| Width across flats | SW | [mm] | 13 | 17 | 19 | 24 | 30 | 36 |
| Nominal drill hole diameter | d_0 | | 10 | 12 | 14 | 18 | 24 | 28 |
| Drill hole depth | h_0 | | $h_0 = h_{ef}$ | | | | | |
| Effective embedment depth | $h_{ef, min}$ | | 60 | 60 | 70 | 80 | 90 | 96 |
| | $h_{ef, max}$ | | 160 | 200 | 240 | 320 | 400 | 480 |
| Minimum spacing and minimum edge distance | s_{min} = c_{min} | | 40 | 45 | 55 | 65 | 85 | 105 |
| | Diameter of the clearance hole of the fixture | | pre positioned installation d_f | 9 | 12 | 14 | 18 | 22 |
| push through installation d_f | | | 11 | 14 | 16 | 20 | 26 | 30 |
| Minimum thickness of concrete member | h_{min} | | $h_{ef} + 30 (\geq 100)$ | | | $h_{ef} + 2d_0$ | | |
| Maximum torque moment for attachment of the fixture | $\max T_{fix}$ | | [Nm] | 10 | 20 | 40 | 60 | 120 |


fischer anchor rod

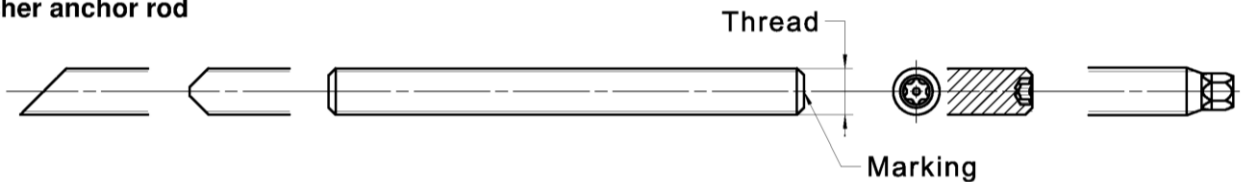

Marking (on random place) fischer anchor rod:

Property class 8.8, stainless steel, property class 80 and high corrosion resistant steel, property class 80: •
 Stainless steel A4, property class 50 and high corrosion resistant steel, property class 50: ••
 Alternatively: Colour coding according to DIN 976-1

Installation conditions:

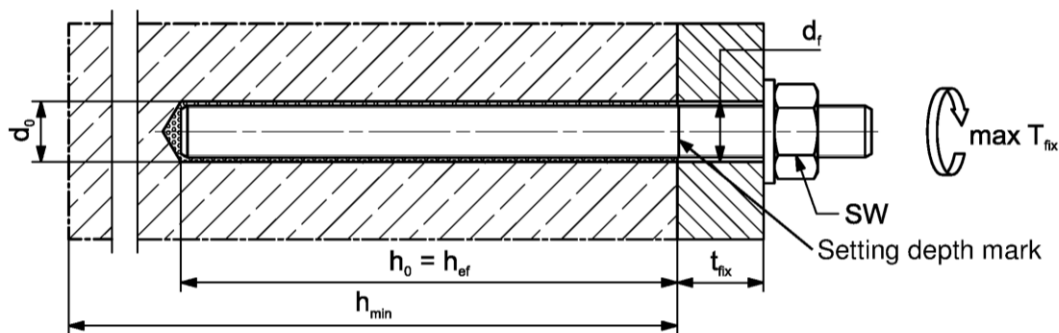

Commercial standard threaded rods, washers and hexagon nuts may also be used if the following requirements are fulfilled

- Materials, dimensions and mechanical properties according to Annex A 4, Table A4.1
- Inspection certificate 3.1 according to EN 10204:2004, the documents have to be stored
- Setting depth is marked

Figures not to scale

fischer injection system FIS P Plus

Intended use
 Installation parameters anchor rods

Annex B 3

Appendix 8 / 15

Table B4.1: Parameters of the cleaning brush BS (steel brush)

The size of the cleaning brush refers to the drill hole diameter

| | | | | | | | | |
|-----------------------------|-------|------|----|----|----|----|----|----|
| Nominal drill hole diameter | d_0 | [mm] | 10 | 12 | 14 | 18 | 24 | 28 |
| Steel brush diameter | d_b | | 11 | 14 | 16 | 20 | 26 | 30 |

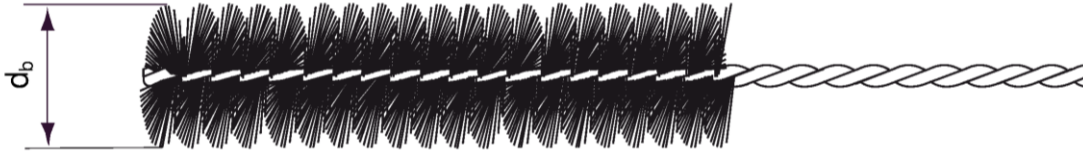


Table B4.2 Maximum processing time of the mortar and minimum curing time
(During the curing time of the mortar the concrete temperature may not fall below the listed minimum temperature)

| Temperature at anchoring base [°C] | Maximum processing time t_{work} | Minimum curing time t_{cure} |
|------------------------------------|------------------------------------|--------------------------------|
| >±0 to +5 | 13 min | 3 h |
| >+5 to +10 | 9 min | 90 min |
| >+10 to +20 | 5 min | 60 min |
| >+20 to +30 | 4 min | 45 min |
| >+30 to +40 | 2 min | 35 min |

¹⁾ In wet concrete or water filled holes the curing times must be doubled

fischer injection system FIS P Plus

Intended use






Cleaning brush (steel brush)
Processing time and curing time

Annex B 4

Appendix 9 / 15



Installation instructions part 1

Drilling and cleaning the hole (hammer drilling with standard drill bit)

| | | |
|---|---|--|
| 1 |  | <p>Drill the hole. Nominal drill hole diameter d_0 and drill hole depth h_0 see tables B3.1</p> |
| 2 |  | <p>Clean the drill hole: For $h_{ef} \leq 12d$ and $d_0 < 18$ mm blow out the hole four times by hand</p> |
| 3 |  | <p>Brush the drill hole four times. For deep holes use an extension. Corresponding brushes see table B4.1</p> |
| 4 |  | <p>Clean the drill hole: For $h_{ef} \leq 12d$ and $d_0 < 18$ mm blow out the hole four times by hand</p> |
|  <p>For $h_{ef} > 12d$ and / or $d_0 \geq 18$ mm blow out the hole four times with oil-free compressed air ($p \geq 6$ bar)</p> | | |

Go to step 5

Drilling and cleaning the hole (hammer drilling with hollow drill bit)

| | | |
|---|---|---|
| 1 |  | <p>Check a suitable hollow drill (see table B1.1) for correct operation of the dust extraction</p> |
| 2 |  | <p>Use a suitable dust extraction system, e. g. Bosch GAS 35 M AFC or a comparable dust extraction system with equivalent performance data</p> <p>Drill the hole with hollow drill bit. The dust extraction system has to extract the drill dust nonstop during the drilling process and must be adjusted to maximum power. Nominal drill hole diameter d_0 and drill hole depth h_0 see tables B3.1</p> |

Go to step 5

fischer injection system FIS P Plus






Intended use
Installation instructions part 1

Annex B 5




Appendix 10 / 15

Installation instructions part 2

Preparing the cartridge

| | | |
|---|---|---|
| 5 |  | <p>Remove the sealing cap</p> <p>Screw on the static mixer (the spiral in the static mixer must be clearly visible)</p> |
| 6 |  |  <p>Place the cartridge into the dispenser</p> |
| 7 |  |  <p>Extrude approximately 10 cm of material out until the resin is evenly grey in colour. Do not use mortar that is not uniformly grey</p> |

Injection of the mortar

| | | | |
|---|---|--|--|
| 8 |  <p>Fill approximately 2/3 of the drill hole with mortar. Always begin from the bottom of the hole and avoid bubbles</p> |  <p>For drill hole depth ≥ 150 mm use an extension tube</p> |  <p>For overhead installation, deep holes ($h_0 > 250$ mm) use an injection-adapter</p> |
|---|---|--|--|

fischer injection system FIS P Plus







Intended use
Installation instructions part 2

Annex B 6

Appendix 11 / 15

Installation instructions part 3

Installation of anchor rods

| | | |
|--------|---|---|
| 9 |  | <p>Only use clean and oil-free anchor elements. Mark the setting depth of the anchor. Push the anchor rod down to the bottom of the hole, turning it slightly while doing so. After inserting the anchor element, excess mortar must be emerged around the anchor element.</p> |
| |  <p>For overhead installations support the anchor rod with wedges. (e. g. fischer centering wedges)</p> |  <p>For push through installation fill the annular gap with mortar</p> |
| 10 |  <p>Wait for the specified curing time t_{cure} see table B4.2</p> | <p>11</p>  <p>Mounting the fixture max T_{fix} see tables B3.1</p> |
| Option |  | <p>After the minimum curing time is reached, the gap between anchor and fixture (annular clearance) may be filled with mortar via the fischer filling disc FFD. Compressive strength $\geq 50 \text{ N/mm}^2$ (e.g. fischer injection mortars FIS HB, FIS SB, FIS V, FIS EM Plus, FIS P Plus) ATTENTION: Using fischer filling disc FFD reduces t_{fix} (usable length of the anchor)</p> |

fischer injection system FIS P Plus

Intended use
 Installation instructions part 3

Annex B 7

Appendix 12 / 15

Table C1.1: Essential characteristic for the **steel bearing capacity** under tensile / shear load of **fischer anchor rods** and **standard threaded rods**

| Anchor rod / standard threaded rod | | M8 | M10 | M12 | M16 | M20 | M24 | | | |
|--|---|-----|----------------|------|---------------------------|---------|-----|-----|-----|-----|
| Bearing capacity under tensile load, steel failure³⁾ | | | | | | | | | | |
| Characteristic resistance $N_{Rk,s}$ | Steel zinc plated | 5.8 | Property class | [kN] | 19 (17) | 29 (27) | 43 | 79 | 123 | 177 |
| | | 8.8 | | | 29 (27) | 47 (43) | 68 | 126 | 196 | 282 |
| | Stainless steel A4 and high corrosion resistant steel C | 50 | | | 19 | 29 | 43 | 79 | 123 | 177 |
| | | 70 | | | 26 | 41 | 59 | 110 | 172 | 247 |
| | | 80 | | | 30 | 47 | 68 | 126 | 196 | 282 |
| Partial factors¹⁾ | | | | | | | | | | |
| Partial factor $\gamma_{Ms,N}$ | Steel zinc plated | 5.8 | Property class | [-] | 1,50 | | | | | |
| | | 8.8 | | | 1,50 | | | | | |
| | Stainless steel A4 and high corrosion resistant steel C | 50 | | | 2,86 | | | | | |
| | | 70 | | | 1,50 ²⁾ / 1,87 | | | | | |
| | | 80 | | | 1,60 | | | | | |
| Bearing capacity under shear load, steel failure without lever arm³⁾ | | | | | | | | | | |
| Characteristic resistance $V_{Rk,s}^0$ | Steel zinc plated | 5.8 | Property class | [kN] | 9 (8) | 15 (13) | 21 | 39 | 61 | 89 |
| | | 8.8 | | | 15 (13) | 23 (21) | 34 | 63 | 98 | 141 |
| | Stainless steel A4 and high corrosion resistant steel C | 50 | | | 9 | 15 | 21 | 39 | 61 | 89 |
| | | 70 | | | 13 | 20 | 30 | 55 | 86 | 124 |
| | | 80 | | | 15 | 23 | 34 | 63 | 98 | 141 |
| Ductility factor | k_7 | [-] | 1,0 | | | | | | | |
| with lever arm³⁾ | | | | | | | | | | |
| Charact. resistance $M_{Rk,s}^0$ | Steel zinc plated | 5.8 | Property class | [Nm] | 19 (16) | 37 (33) | 65 | 166 | 324 | 560 |
| | | 8.8 | | | 30 (26) | 60 (53) | 105 | 266 | 519 | 896 |
| | Stainless steel A4 and high corrosion resistant steel C | 50 | | | 19 | 37 | 65 | 166 | 324 | 560 |
| | | 70 | | | 26 | 52 | 92 | 232 | 454 | 784 |
| | | 80 | | | 30 | 60 | 105 | 266 | 519 | 896 |
| Partial factors¹⁾ | | | | | | | | | | |
| Partial factor $\gamma_{Ms,V}$ | Steel zinc plated | 5.8 | Property class | [-] | 1,25 | | | | | |
| | | 8.8 | | | 1,25 | | | | | |
| | Stainless steel A4 and high corrosion resistant steel C | 50 | | | 2,38 | | | | | |
| | | 70 | | | 1,25 ²⁾ / 1,56 | | | | | |
| | | 80 | | | 1,33 | | | | | |

¹⁾ In absence of other national regulations

²⁾ Only admissible for steel C, with $f_{yk} / f_{uk} \geq 0,8$ and $A_5 > 12 \%$ (e.g. fischer anchor rods)

³⁾ Values in brackets are valid for undersized threaded rods with smaller stress area A_s for hotdip galvanised standard threaded rods according to EN ISO 10684:2004+AC:2009.

fischer injection steel system FIS P Plus

Performances

Essential characteristics for the steel bearing capacity of fischer anchor rods and standard threaded rods

Annex C 1

Appendix 13 / 15

| Table C2.1: Essential characteristics under tensile / shear load | | | | | | | | | |
|---|--------------------------|-------------|-----------|----------------------|-----|-----|-----|--------------------------------------|-----|
| Size | | | All sizes | | | | | | |
| Tensile load | | | | | | | | | |
| Uncracked concrete | | $k_{Ucr,N}$ | [-] | 11,0 | | | | | |
| Factors for the compressive strength of concrete > C20/25 | | | | | | | | | |
| Increasing factor for τ_{Rk} | C25/30 | Ψ_c | [-] | 1,05 | | | | | |
| | C30/37 | | | 1,10 | | | | | |
| | C35/45 | | | 1,15 | | | | | |
| | C40/50 | | | 1,19 | | | | | |
| | C45/55 | | | 1,22 | | | | | |
| | C50/60 | | | 1,26 | | | | | |
| Splitting failure | | | | | | | | | |
| Edge distance | $h / h_{ef} \geq 2,0$ | $c_{cr,sp}$ | [mm] | 1,0 h_{ef} | | | | | |
| | $2,0 > h / h_{ef} > 1,3$ | | | 4,6 h_{ef} - 1,8 h | | | | | |
| | $h / h_{ef} \leq 1,3$ | | | 2,26 h_{ef} | | | | | |
| Spacing | $s_{cr,sp}$ | | | 2 $c_{cr,sp}$ | | | | | |
| Concrete cone failure | | | | | | | | | |
| Edge distance | $c_{cr,N}$ | | [mm] | 1,5 h_{ef} | | | | | |
| Spacing | $s_{cr,N}$ | | | 2 $c_{cr,N}$ | | | | | |
| Installation factor tensile load | γ_{inst} | | [-] | 1,2 | | | | | |
| Shear load | | | | | | | | | |
| Installation factor shear load | γ_{inst} | | [-] | 1,0 | | | | | |
| Concrete pry-out failure | | | | | | | | | |
| Factor for pry-out failure | k_g | | [-] | 2,0 | | | | | |
| Calculation diameters | | | | | | | | | |
| Size | | | | M8 | M10 | M12 | M16 | M20 | M24 |
| fischer anchor rods and standard threaded rods | d_{nom} | | [mm] | 8 | 10 | 12 | 16 | 20 | 24 |
| fischer injection system FIS P Plus | | | | | | | | Annex C 2 Appendix 14 / 15 | |
| Performances Essential characteristics under tensile / shear load | | | | | | | | | |

Table C3.1: Essential characteristics of **tensile resistance** for **fischer anchor rods** and **standard threaded rods** in hammer drilled holes; **uncracked concrete**

| Anchor rod / standard threaded rod | | M8 | M10 | M12 | M16 | M20 | M24 | |
|---|---------------------|--------------------------------------|-----|-----|-------------------|-----|-----|---|
| Combined pullout and concrete cone failure | | | | | | | | |
| Calculation diameter | d [mm] | 8 | 10 | 12 | 16 | 20 | 24 | |
| Uncracked concrete | | | | | | | | |
| Characteristic bond resistance in uncracked concrete C20/25 | | | | | | | | |
| Hammer-drilling with standard drill bit or hollow drill bit (dry or wet concrete) | | | | | | | | |
| Temperature range | I: 24 °C / 40 °C | $\tau_{RK,ucr}$ [N/mm ²] | 7,5 | 7,5 | 7,5 | 7,5 | 7 | 7 |
| | II: 50 °C / 80 °C | | 6,5 | 6,5 | 6,5 | 6,5 | 6 | 6 |
| Hammer-drilling with standard drill bit or hollow drill bit (flooded hole) | | | | | | | | |
| Temperature range | I: 24 °C / 40 °C | $\tau_{RK,ucr}$ [N/mm ²] | --- | --- | 7,5 | 7,5 | 7 | 7 |
| | II: 50 °C / 80 °C | | --- | --- | 6,5 | 6,5 | 6 | 6 |
| Installation factors | | | | | | | | |
| Dry or wet concrete | γ_{inst} [-] | 1,0 | | | | | | |
| Flooded hole | | --- | | | 1,2 ¹⁾ | | | |

¹⁾ Only with coaxial cartridges: 380ml, 400 ml, 410 ml

Table C3.2: Displacements for anchor rods

| Anchor rod | | M8 | M10 | M12 | M16 | M20 | M24 |
|---|---------------------------|------|------|------|------|------|------|
| Displacement-Factors for tensile load¹⁾ | | | | | | | |
| Uncracked concrete; Temperature range I, II | | | | | | | |
| δ_{N0} -Factor | [mm/(N/mm ²)] | 0,09 | 0,09 | 0,10 | 0,10 | 0,10 | 0,10 |
| $\delta_{N\infty}$ -Factor | | 0,10 | 0,10 | 0,12 | 0,12 | 0,12 | 0,13 |
| Displacement-Factors for shear load²⁾ | | | | | | | |
| Uncracked concrete; Temperature range I, II | | | | | | | |
| δ_{V0} -Factor | [mm/kN] | 0,11 | 0,11 | 0,10 | 0,10 | 0,09 | 0,09 |
| $\delta_{V\infty}$ -Factor | | 0,12 | 0,12 | 0,11 | 0,11 | 0,10 | 0,10 |

¹⁾ Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0}\text{-Factor} \cdot \tau_{Ed}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot \tau_{Ed}$$

(τ_{Ed} : Design value of the applied tensile stress)

²⁾ Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0}\text{-Factor} \cdot V_{Ed}$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-Factor} \cdot V_{Ed}$$

(V_{Ed} : Design value of the applied shear force)

fischer injection system FIS P Plus

Performances

Essential characteristics of tensile resistance for fischer anchor rod, standard threaded rods (uncracked concrete), Displacement for anchor rods