

**DECLARAȚIA DE PERFORMANȚĂ****DoP 0186**

pentru bulonul de ancorare fischer FAZ II, FAZ II R, FAZ II HCR (Ancore din metal pentru utilizare în beton)

RO

1. <u>Cod unic de identificare al produsului-tip:</u>	<b>DoP 0186</b>		
2. <u>Utilizare (utilizări) preconizată (preconizate):</u>	<b>Prindere cu instalare ulterioară în beton fisurat sau nefisurat.</b> Consultați suplimentul, în special anexele B1- B6 fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Germany		
3. <u>Fabricant:</u>			
4. <u>Reprezentant autorizat:</u>	–		
5. <u>Sistemul (sistemele) de evaluare și de verificare a constantei performanței:</u>	1		
6. <u>Documentul de evaluare europeană:</u> Evaluarea tehnică europeană: Organismul de evaluare tehnică: Organism (organisme) notificat(e):	<b>EAD 330232-00-0601</b> ETA-05/0069; 2020-04-24 DIBt- Deutsches Institut für Bautechnik 1343 MPA Darmstadt / 2873 TU Darmstadt		
7. <u>Performanța (performante) declarată (declarate):</u> <b>Rezistență mecanică și stabilitate (BWR 1)</b> Rezistență caracteristică la întindere (pentru încărcări statice și cvasistatiche):	Rezistență la cedarea oțelului:	Anexe C1	$E_s = 210\,000 \text{ MPa}$
	Rezistență la smulgere:	Anexe C1	
	Rezistență la cedarea conului de beton:	Anexe C1	
	Robustețe:	Anexe C1	
	Distanță minimă față de margine și între ancore:	Anexe B3, B4	
	Distanță față de margine pentru a preveni fisuri sub încărcare:	Anexe C1	
	Deplasări sub încărcări statice și cvasistatiche:	Anexe C5	
Rezistență caracteristică la forfecare (pentru încărcări statice și cvasistatiche):	Rezistență la cedarea oțelului (rezistență la forfecare):	Anexe C2	
	Rezistență la cedarea cu braț de levier:	Anexe C2	
	Rezistență la cedarea muchiei betonului:	Anexe C2	
	Deplasări sub încărcări statice și cvasistatiche:	Anexe C5	
	Durabilitate:	Anexe A4, B1	
Rezistență caracteristică și Deplasări pentru performanță seismică de categoriile C1 și C2:	Rezistență la cedarea oțelului:	Anexe C4	
	Rezistență la smulgere:	Anexe C4	
	Alungirea la rupere:	>8%	
	Factor gol circular:	Anexe C4	
	Deplasări:	Anexe C5	
<b>Siguranță în caz de incendiu (BWR 2)</b>			
Reacție la foc:	Clasa (A1)		
Rezistență la incendiu:	Rezistență la foc în ipoteza cedării oțelului	Anexe C3	
	Rezistență la foc în ipoteza cedării prin smulgere	Anexe C3	
	Rezistență la foc în ipoteza cedării oțelului	Anexe C3	



8. Documentatie tehnică adekvată și/sau documentatie tehnică specifică: -

Performanța produsului identificat mai sus este în conformitate cu setul de performanțe declarate. Această declarație de performanță este eliberată în conformitate cu Regulamentul (UE) nr. 305/2011, pe răspunderea exclusivă a fabricantului identificat mai sus.

Semnată pentru și în numele fabricantului de către:

Thilo Pregartner, Dr.-Ing.  
Tumlingen, 2020-05-15

Peter Schillinger, Dipl.-Ing.

Această declarație de performanță a fost întocmită în mai multe limbi. În cazul unei divergențe de interpretare, versiunea în limba engleză prevalează întotdeauna.

Suplimentul include informații voluntare și complementare în limba engleză, în afara cerințelor legale (specificate neutru din punct de vedere al limbii).

## Specific Part

### 1 Technical description of the product

The fischer Bolt Anchor FAZ II is an anchor made of galvanised steel (FAZ II) or made of stainless steel (FAZ II R) or high corrosion resistant steel (FAZ II HCR) which is placed into a drilled hole and anchored by torque-controlled expansion.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the fastener is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the fastener of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex B 3, C 1
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C 2
Displacements (static and quasi-static loading)	See Annex C 5
Characteristic resistance and displacements for seismic performance categories C1 and C2	See Annex C 4
Durability	See Annex B 1

#### 3.2 Safety in case of fire (BWR 2)


Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C 3

### 4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base


In accordance with the European Assessment Document EAD 330232-00-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1



Cone bolt manufactured by cold - forming:

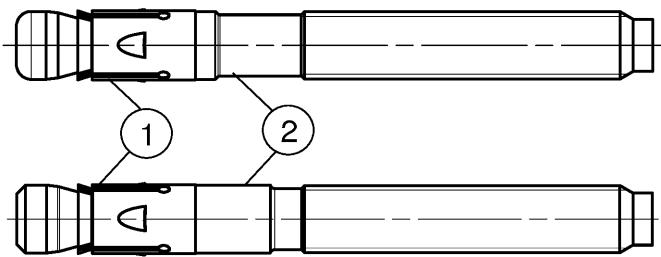

Cone bolt manufactured by turning:

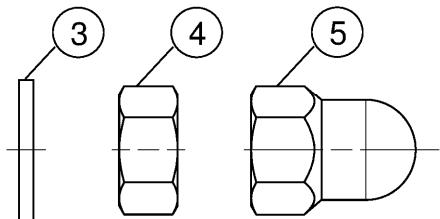

- ① Expansion sleeve
- ② Cone bolt (cold – formed or turned)
- ③ Washer
- ④ Hexagon nut
- ⑤ fischer FAZ II dome nut

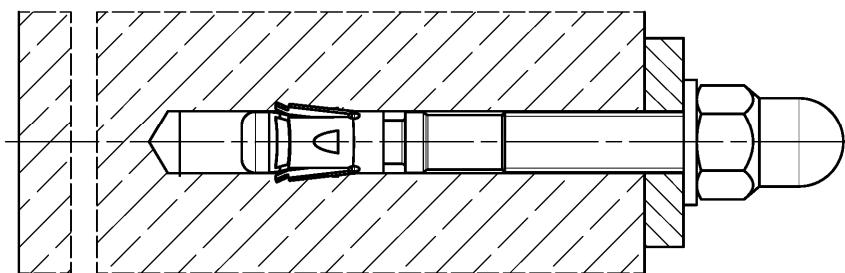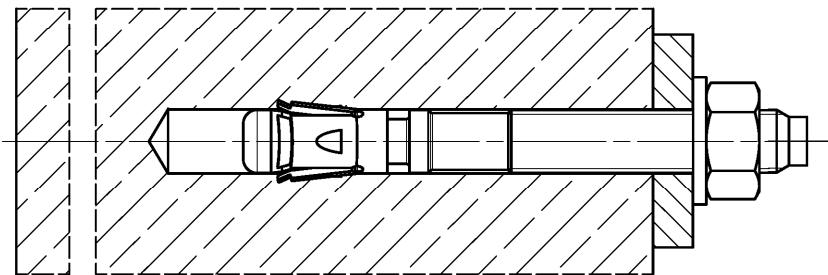


(Fig. not to scale)

fischer Bolt Anchor FAZ II, FAZ II R, FAZ II HCR


**Product description**  
Installed condition

**Annex A 1**  
Appendix 2/ 16

## Product label and letter-code:

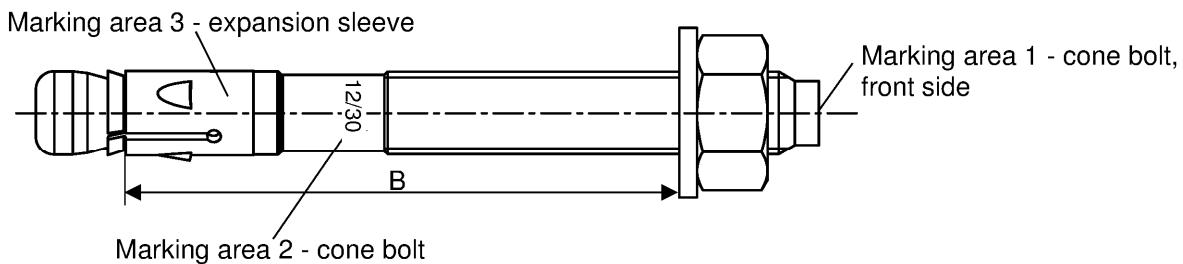

Product label, example:



Brand | type of fastener

placed at marking area 2 or marking area 3

Thread size / max. thickness of the fixture ( $t_{fix}$ )

identification R or HCR placed at marking area 2

FAZ II: carbon steel, galvanized

FAZ II R: stainless steel

FAZ II HCR: high corrosion resistant steel

**Table A2.1:** Letter - code at marking area 1:

Marking	(a)	(b)	(c)	(d)	(A)	(B)	(C)	(D)	(E)	(F)	(G)	(H)	(I)	(K)
Max. $t_{fix}$	5	10	15	20	5	10	15	20	25	30	35	40	45	50
B ≥ [mm]	M6	-	-	-	45	50	55	60	65	70	75	80	85	90
	M8	40	45	-	50	55	60	65	70	75	80	85	90	95
	M10	45	50	55	60	65	70	75	80	85	90	95	100	105
	M12	55	60	65	70	75	80	85	90	95	100	105	110	115
	M16	70	75	80	85	90	95	100	105	110	115	120	125	130
	M20	-	-	-	105	110	115	120	125	130	135	140	145	150
	M24	-	-	-	130	135	140	145	150	155	160	165	170	175

Marking	(L)	(M)	(N)	(O)	(P)	(R)	(S)	(T)	(U)	(V)	(W)	(X)	(Y)	(Z)
Max. $t_{fix}$	60	70	80	90	100	120	140	160	180	200	250	300	350	400
B ≥ [mm]	M6	100	110	120	130	140	160	180	200	220	240	290	340	390
	M8	105	115	125	135	145	165	185	205	225	245	295	345	395
	M10	120	130	140	150	160	180	200	220	240	260	310	360	410
	M12	130	140	150	160	170	190	210	230	250	270	320	370	420
	M16	145	155	165	175	185	205	225	245	265	285	335	385	435
	M20	160	170	180	190	200	220	240	260	280	300	350	400	450
	M24	185	195	205	215	225	245	265	285	305	325	375	425	475

### Calculation existing $h_{ef}$ for installed fasteners:

$$\text{existing } h_{ef} = B_{(\text{according to table A2.1})} - \text{existing } t_{fix}$$

Thickness of the fixture  $t_{fix}$  including thickness of fastener plate  $t$  and e.g. thickness of grout layer  $t_{grout}$   
or other non-structural layers

(Fig. not to scale)

fischer Bolt Anchor FAZ II, FAZ II R, FAZ II HCR


### Product description

Product label and letter code

### Annex A 2

Appendix 3/16

## Product dimensions

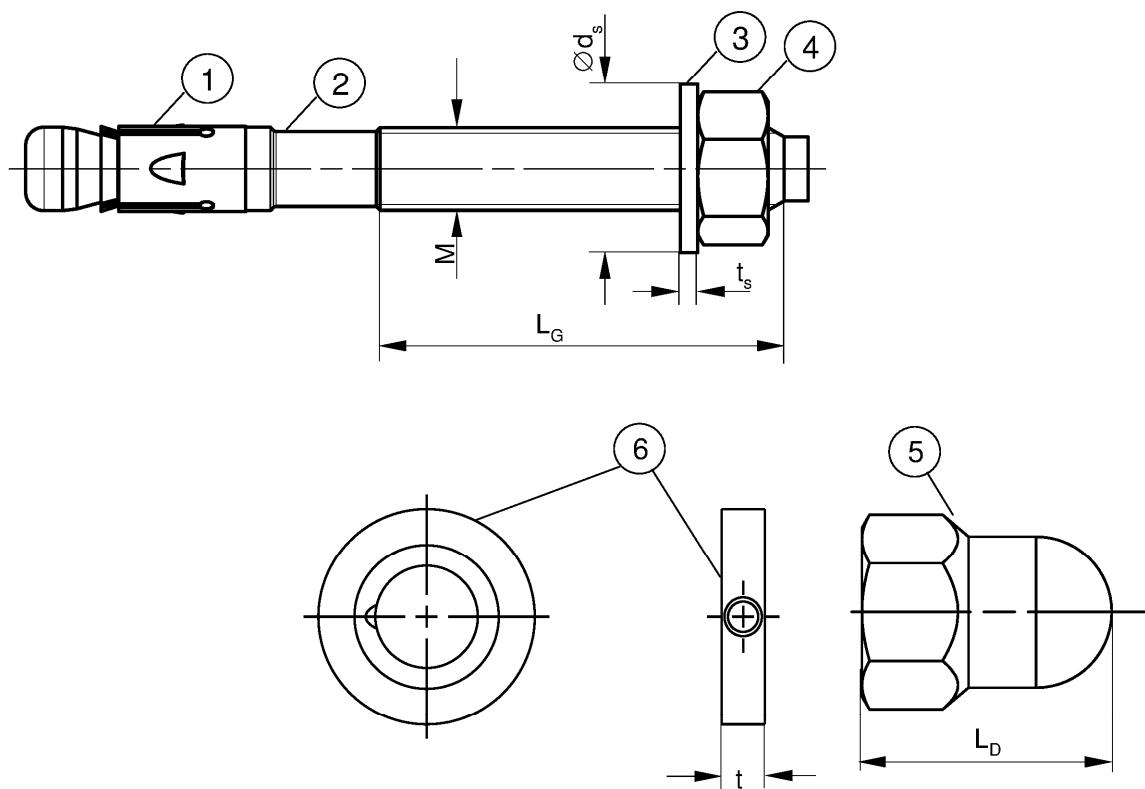

**Table A3.1:** Dimensions [mm]

Part	Designation	FAZ II, FAZ II R, FAZ II HCR						
		M6	M8	M10	M12	M16	M20	M24
1	Expansion sleeve	Sheet thickness	0,8	1,3	1,4	1,6	2,4	3,0
2	Cone bolt	Thread size M	6	8	10	12	16	20
		$L_G$	10	19	26	31	40	50
3	Washer	$t_s$	$\geq$	1,4	1,8	2,3	2,7	3,7
		$\varnothing d_s$		11	15	19	23	36
4 & 5	Hexagon nut / fischer FAZ II dome nut	Wrench size	10	13	17	19	24	30
5	$L_D$	$\geq$	-	22	27	33	-	
6	fischer filling disc FFD	$t$	=	6			7	8
								10

(Fig. not to scale)

fischer Bolt Anchor FAZ II, FAZ II R, FAZ II HCR

**Product description**  
Dimensions

**Annex A 3**  
Appendix 4/ 16

**Table A4.1:** Materials FAZ II (ISO 4042:2018/Zn5/An(A2K))

Part	Designation	Material
1	Expansion sleeve	Cold strip, EN 10139:2016 or stainless steel EN 10088:2014
2	Cone bolt	Cold form steel or free cutting steel
3	Washer	Cold strip, EN 10139:2016
4	Hexagon nut	Steel, property class min. 8, EN ISO 898-2:2012

**Table A4.2:** Materials FAZ II R

Part	Designation	Material
1	Expansion sleeve	Stainless steel EN 10088:2014
2	Cone bolt	
3	Washer	
4	Hexagon nut	Stainless steel EN 10088:2014; ISO 3506-2:2018; property class – min. 70

**Table A4.3:** Materials FAZ II HCR

Part	Designation	Material
1	Expansion sleeve	Stainless steel EN 10088:2014
2	Cone bolt	High corrosion resistant steel EN 10088:2014
3	Washer	
4	Hexagon nut	High corrosion resistant steel EN 10088:2014; ISO 3506-2:2018; property class – min. 70

(Fig. not to scale)

fischer Bolt Anchor FAZ II, FAZ II R, FAZ II HCR

**Product description**  
Materials**Annex A 4**  
Appendix 5/ 16

## Specifications of intended use

### Anchorages subject to:

Size	FAZ II, FAZ II R, FAZ II HCR						
	M6	M8	M10	M12	M16	M20	M24
Static and quasi-static loads							
Cracked and uncracked concrete					✓		
Fire exposure							
Seismic performance category	C1	-			✓		-
	C2 <sup>1)</sup>	-			✓		

<sup>1)</sup> FAZ II HCR: Only valid for cold-formed version (according to Annex A1)

### Base materials:

- Compacted reinforced and unreinforced normal weight concrete without fibres (cracked and uncracked) according to EN 206-1:2013+A1:2016
- Strength classes C20/25 to C50/60 according to EN 206-1:2013+A1:2016

### Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (FAZ II, FAZ II R, FAZ II HCR)
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (FAZ II R, FAZ II HCR)
- Structures subject to external atmospheric exposure and permanently damp internal condition, if other particular aggressive conditions exist (FAZ II HCR)

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where deicing materials are used)

### Design:

- Anchorages are to be designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.)
- Design of fastenings according to EN 1992-4:2018 and EOTA Technical Report TR 055
- For effective embedment depth  $h_{ef} < 40$  mm only statically indeterminate fixings (e.g. light-weight suspended ceilings with internal exposure) are covered by the ETA

fischer Bolt Anchor FAZ II, FAZ II R, FAZ II HCR


**Intended Use**  
Specifications

**Annex B 1**  
Appendix 6/ 16

**Table B2.1: Installation parameters**

Size	FAZ II, FAZ II R, FAZ II HCR						
	M6	M8	M10	M12	M16	M20	M24
Nominal drill hole diameter $d_0 =$	6	8	10	12	16	20	24
Maximum bit diameter with hammer or hollow drilling	6,40	8,45	10,45	12,5	16,5	20,55	24,55
Maximum bit diameter with diamond drilling	-	8,15		12,25	16,45	20,50	24,40
Overall fastener embedment depth in the concrete $h_{\text{nom}} \geq (L)$	46,5 (6,5)	44,5 (9,5)	52,0 (12)	63,5 (13,5)	82,5 (17,5)	120 (20)	148,5 (23,5)
Depth of drill hole to deepest point $h_1 \geq$	Existing $h_{\text{ef}} + L = h_{\text{nom}}$						$h_{\text{nom}} + 10$
Diameter of clearance hole in the fixture $d_f \leq$ [mm]	7	9	12	14	18	22	26
Required setting torque $T_{\text{inst}} =$ [Nm]	8	20	45	60	110	200	270
Excess length after hammering-in the cone bolt (for fischer dome nut applications according to Annex B6)	O = [mm]	-	12	16	20	-	-

Setting gauge FAZ II SL-H  
for anchor with fischer FAZ II dome nut:

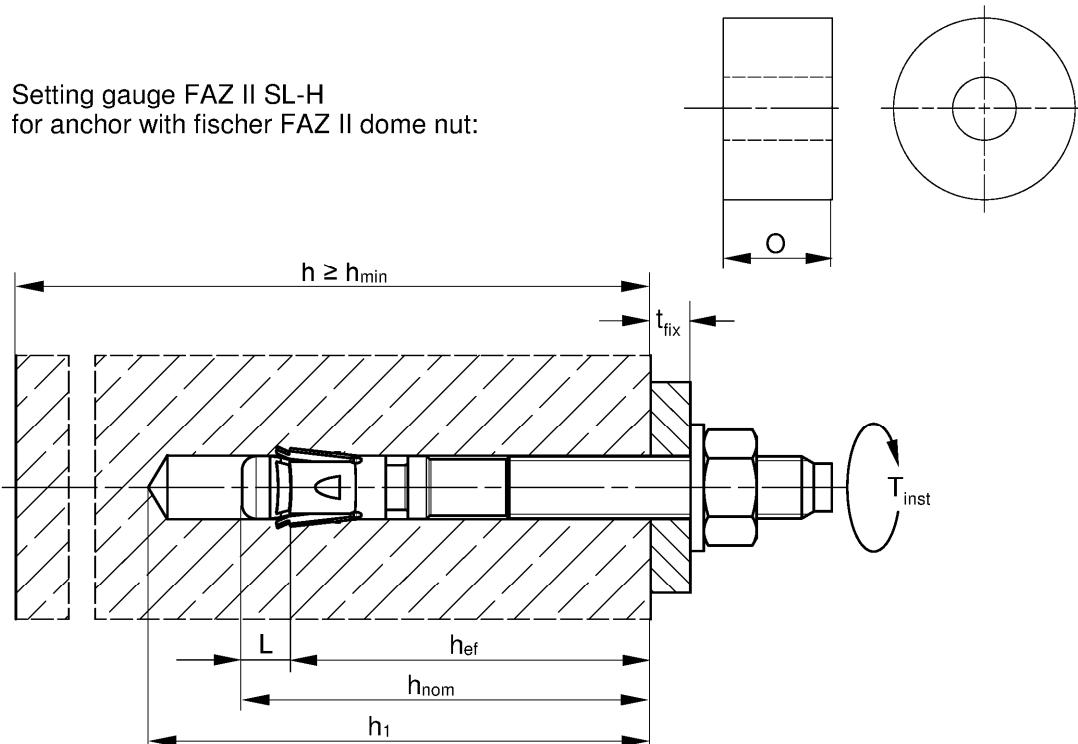

$h_{\text{ef}}$  = Effective embedment depth

$t_{\text{fix}}$  = Thickness of the fixture

$h_1$  = Depth of drill hole to deepest point

$h$  = Thickness of the concrete member

$h_{\text{min}}$  = Minimum thickness of concrete member

$h_{\text{nom}}$  = Overall fastener embedment depth in the concrete

$T_{\text{inst}}$  = Required setting torque

(Fig. not to scale)

fischer Bolt Anchor FAZ II, FAZ II R, FAZ II HCR

**Intended Use**  
Installation parameters

**Annex B 2**

Appendix 7/16

**Table B3.1:** Minimum thickness of concrete members, minimum spacing and minimum edge distance

Size	FAZ II, FAZ II R, FAZ II HCR						
	M6	M8	M10	M12	M16	M20	M24
<b>Minimum edge distance</b>							
Uncracked concrete	c <sub>min</sub>	45	40	45	55	65	95 135
Cracked concrete							85 100
Corresponding spacing	s [mm]	according to Annex B4					
Minimum thickness of concrete member	h <sub>min</sub>	80		100	140	160	200
Thickness of concrete member	h ≥	max. {h <sub>min</sub> ; h <sub>1</sub> <sup>1)</sup> } + 30}			max. {h <sub>min</sub> ; h <sub>1</sub> <sup>1)</sup> } + 2 · d <sub>o</sub> }		
<b>Minimum spacing</b>							
Uncracked concrete	s <sub>min</sub>	35	40 35	40	50	65	95 100
Cracked concrete							
Corresponding edge distance	c [mm]	according to Annex B4					
Minimum thickness of concrete member	h <sub>min</sub>	80		100	140	160	200
Thickness of concrete member	h ≥	max. {h <sub>min</sub> ; h <sub>1</sub> <sup>1)</sup> } + 30}			max. {h <sub>min</sub> ; h <sub>1</sub> <sup>1)</sup> } + 2 · d <sub>o</sub> }		
<b>Minimal splitting area</b>							
Uncracked concrete	A <sub>sp,req</sub> [·1000 mm <sup>2</sup> ]	5,1	18	37	54	67	100 117,5
Cracked concrete		1,5	12	27	40	50	77 87,5

<sup>1)</sup> h<sub>1</sub> according to Annex B2

**Splitting failure** applied for minimum edge distance and spacing in dependence of the h<sub>ef</sub>

For the calculation of minimum spacing and minimum edge distance of anchors in combination with different embedment depths and thicknesses of concrete members the following equation shall be fulfilled:

$$A_{sp,req} < A_{sp,ef}$$

A<sub>sp,req</sub> = required splitting area

A<sub>sp,ef</sub> = effective splitting area (according to Annex B4)

fischer Bolt Anchor FAZ II, FAZ II R, FAZ II HCR


**Intended Use**

Minimum thickness of member, minimum spacing and edge distance

**Annex B 3**


Appendix 8/16

**Table B4.1:** Effective splitting area  $A_{sp,ef}$  with member thickness  $h > h_{ef} + 1,5 \cdot c$  and  $h \geq h_{min}$

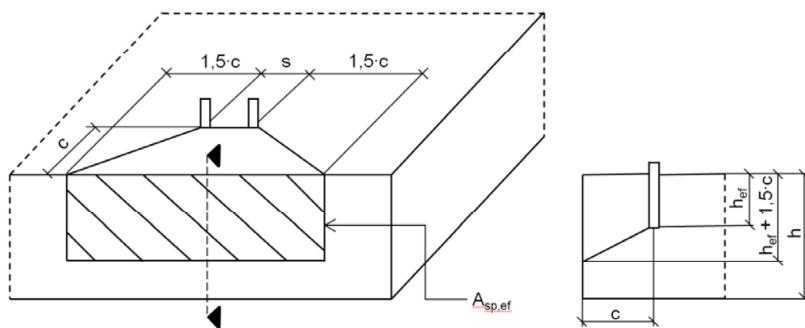

Single anchor and group of anchors with $s > 3 \cdot c$	$A_{sp,ef} = (6 \cdot c) \cdot (h_{ef} + 1,5 \cdot c)$ [mm <sup>2</sup> ]	with $c \geq c_{min}$
Group of anchors with $s \leq 3 \cdot c$	$A_{sp,ef} = (3 \cdot c + s) \cdot (h_{ef} + 1,5 \cdot c)$ [mm <sup>2</sup> ]	with $c \geq c_{min}$ and $s \geq s_{min}$

**Table B4.2:** Effective splitting area  $A_{sp,ef}$  with member thickness  $h \leq h_{ef} + 1,5 \cdot c$  and  $h \geq h_{min}$

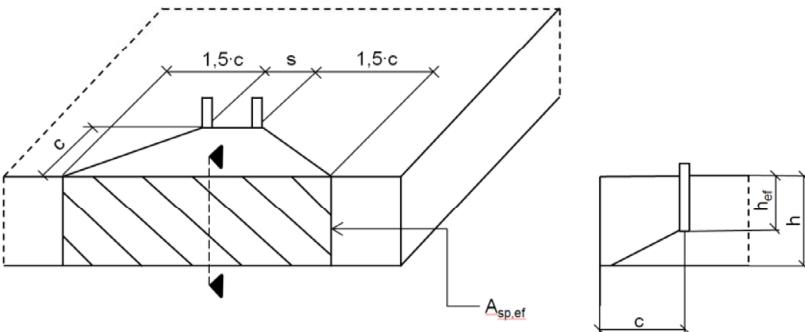

Single anchor and group of anchors with $s > 3 \cdot c$	$A_{sp,ef} = 6 \cdot c \cdot \text{existing } h$ [mm <sup>2</sup> ]	with $c \geq c_{min}$
Group of anchors with $s \leq 3 \cdot c$	$A_{sp,ef} = (3 \cdot c + s) \cdot \text{existing } h$ [mm <sup>2</sup> ]	with $c \geq c_{min}$ and $s \geq s_{min}$

Edge distance and axial spacing shall be rounded to at least 5 mm

(Fig. not to scale)

fischer Bolt Anchor FAZ II, FAZ II R, FAZ II HCR

#### Intended Use

Minimum thickness of member, minimum spacings and edge distances

#### Annex B 4






Appendix 9/16

## Installation instructions:

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Use of the anchor only as supplied by the manufacturer without exchanging the components of the anchor  
Exception: fischer FAZ II dome nut.
- Checking before placing the anchor to ensure that the strength class of the concrete in which the anchor is to be placed is in the range given and is not lower than that of the concrete to which the characteristic loads apply
- Check of concrete being well compacted, e.g. without significant voids
- Hammer, hollow or diamond drilling according to Annex B5
- Drill hole created perpendicular +/- 5° to concrete surface, positioning without damaging the reinforcement
- In case of aborted hole: new drilling at a minimum distance twice the depth of the aborted drill hole or smaller distance if the aborted drill hole is filled with high strength mortar and if under shear or oblique tension load it is not in the direction of load application
- It must be ensured that in case of fire local spalling of the concrete cover does not occur
- Fastenings in stand-off installation or with a grout layer under seismic action are not covered
- In case of seismic applications the fastener shall be positioned outside of critical regions (e.g. plastic hinges) of the concrete structure


## Installation instructions: Drilling and cleaning the hole

Types of drills and cleaning


Hammer drill		 1: Drill the hole	 2: Clean the hole
Hollow drill		 1: Drill the hole with automatic cleaning	-
Diamond drill, for non seismic applications only and $\geq$ drill $\varnothing 8$		 1: Drill the hole	 2: Clean the hole
fischer Bolt Anchor FAZ II, FAZ II R, FAZ II HCR			
<b>Intended Use</b> Installation instructions			<b>Annex B 5</b> Appendix 10/ 16

## Installation instructions: Installation of the anchor


### HEXAGON NUT:



3: Set the fastener




4: Apply  $T_{inst}$




5: Installed fastener

### fischer FAZ II DOME NUT:


Option 1: Push through installation with setting gauge SL-H:




3: Set the fastener using setting gauge




4: Check offset



5: Turn on the washer and fischer FAZ II dome nut




6: Apply  $T_{inst}$




7: Installed fastener


Option 2: Push through installation with hexagon nut:



3: Set the fastener





4: check setting position: Visible one turn of a thread



4.1: Remove nut

### fischer FILLING DISC FFD optional for seismic C2 application or minimizing the annular gap:

Optional	The gap between bolt and fixture may be filled with mortar (compressive strength $\geq 50 \text{ N/mm}^2$ e.g. FIS SB) after step 7 (for eliminating the annular gap). The filling disc is additional to the standard washer. The thickness of the filling disc must be considered for definition of $t_{fix}$ . Countersunk of the filling disc in direction to the anchor plate.	 
----------	---	---

fischer Bolt Anchor FAZ II, FAZ II R, FAZ II HCR

**Intended Use**  
Installation instructions

**Annex B 6**  
Appendix 11/ 16

**Table C1.1: Characteristic tension resistance under static and quasi-static action**

Size	FAZ II, FAZ II R, FAZ II HCR								
	M6	M8	M10	M12	M16	M20	M24		
<b>Steel failure</b>									
Characteristic resistance FAZ II FAZ II R/HCR	N <sub>Rk,s</sub> [kN]	7,6 11,4	16,6 17,0	28,3 29,0	43,2 44,3	67,0 70,6	123,3 124,9	176,7 183,6	
Partial factor for steel failure	$\gamma_{Ms}^{1)}$ [-]					1,5			
<b>Pullout failure</b>									
Effective embedment depth for calculation	h <sub>ef</sub> [mm]	40	35 - < 45	45	40 - 60	50 - 70	65 - 85	100	125
Characteristic resistance in cracked concrete C20/25	N <sub>Rk,p</sub> [kN]	1,5	5,5	8	13	20	27,0	34,4	48,1
Characteristic resistance in uncracked concrete C20/25		10,5	14		20	22	38,6	49,2	68,8
Increasing factors for N <sub>Rk,p</sub> for cracked and uncracked concrete	C25/30					1,12			
	C30/37					1,22			
	C35/45					1,32			
	C40/50					1,41			
	C45/55					1,50			
	C50/60					1,58			
Installation factor	$\gamma_{inst}$ [-]					1,0			
<b>Concrete cone and splitting failure</b>									
Factor for uncracked concrete	k <sub>ucr,N</sub>	[-]				11,0 <sup>2)</sup>			
Factor for cracked concrete	k <sub>cr,N</sub>					7,7 <sup>2)</sup>			
Characteristic spacing	S <sub>cr,N</sub>	[mm]				3 · h <sub>ef</sub>			
Characteristic edge distance	C <sub>cr,N</sub>					1,5 · h <sub>ef</sub>			
Spacing	S <sub>cr,sp</sub>	[mm]				2 · C <sub>cr,sp</sub>			
Edge distance for h = 80									
Edge distance for h = 100									
Edge distance for h = 120									
Edge distance for h = 140									
Edge distance for h = 160									
Edge distance for h = 200									
Characteristic resistance to splitting	N <sup>0</sup> <sub>Rk,sp</sub> [kN]					min {N <sup>0</sup> <sub>Rk,c</sub> ; N <sub>Rk,p</sub> } <sup>3)</sup>			

<sup>1)</sup> In absence of other national regulations

<sup>2)</sup> Based on concrete strength as cylinder strength

<sup>3)</sup> N<sup>0</sup><sub>Rk,c</sub> according to EN 1992-4:2018

fischer Bolt Anchor FAZ II, FAZ II R, FAZ II HCR

#### Performances

Characteristic values of resistance under tension loads

#### Annex C 1

Appendix 12/ 16

**Table C2.1:** Characteristic values of **shear** resistance under static and quasi-static action

Size	FAZ II, FAZ II R, FAZ II HCR							
	M6	M8	M10	M12	M16	M20	M24	
<b>Steel failure without lever arm</b>								
Characteristic resistance	FAZ II	$V^0_{Rk,s}$ [kN]	5,9	13,6	21,4	30,6	55,0	81,4
	FAZ II R/HCR		8,8	16,8	26,5	38,3	69,8	106,3
Partial factor for steel failure	$\gamma_{Ms}^{1)}$	$k_7$ [-]	1,25					
Factor for ductility			1,0					
<b>Steel failure with lever arm and Concrete prout failure</b>								
Effective embedment depth for calculation	$h_{ef}$ [mm]	40	45	60	70	85	100	125
Characteristic bending resistance	FAZ II	$M^0_{Rk,s}$ [Nm]	11,4	26	52	92	233	513
	FAZ II R/HCR		10,7	29	59	100	256	519
Factor for prout failure	$k_8$ [-]	2,6	2,8	3,2		3,0	2,6	2,4
Effective embedment depth for calculation	$h_{ef}$ [mm]	-	35 - < 45	40 - < 60	50 - < 70	65 - < 85	-	
Characteristic bending resistance	FAZ II		20	44	92	184		
	FAZ II R/HCR		21	45	100	193		
Factor for prout failure	$k_8$ [-]		2,5	2,6	3,1	3,2		
Partial factor for steel failure	$\gamma_{Ms}^{1)}$	1,25						
Factor for ductility	$k_7$ [-]	1,0						
<b>Concrete edge failure</b>								
Effective embedment depth for calculation	$l_f =$ [mm]	$h_{ef}$						
Outside diameter of a fastener	$d_{nom}$	6	8	10	12	16	20	24
1) In absence of other national regulations								
fischer Bolt Anchor FAZ II, FAZ II R, FAZ II HCR								
<b>Performances</b> Characteristic values of resistance under shear loads							<b>Annex C 2</b> Appendix 13/ 16	

**Table C3.1: Characteristic values of tension resistance under fire exposure**

Size	$h_{ef} \geq [mm]$	FAZ II, FAZ II R, FAZ II HCR							
		M6	M8	M10	M12	M16	M20	M24	
Characteristic resistance steel failure	R30	0,6 <sup>1)</sup> / 0,9 <sup>2)</sup>	1,4	2,8	5,0	9,4	14,7	21,1	
	N <sub>Rk,s,fi</sub> R60	0,4 <sup>1)</sup> / 0,9 <sup>2)</sup>	1,2	2,3	4,1	7,7	12,0	17,3	
	R90	0,3 <sup>1)</sup> / 0,9 <sup>2)</sup>	0,9	1,9	3,2	6,0	9,4	13,5	
	R120	0,2 <sup>1)</sup> / 0,7 <sup>2)</sup>	0,8	1,6	2,8	5,2	8,1	11,6	
Characteristic resistance Concrete cone failure	R30 - R90	$7,7 \cdot h_{ef}^{1,5} \cdot (20)^{0,5} \cdot h_{ef} / 200 / 1000$							
	R120	$7,7 \cdot h_{ef}^{1,5} \cdot (20)^{0,5} \cdot h_{ef} / 200 / 1000 \cdot 0,8$							
	Characteristic resistance pullout failure	R30	0,9 / 2,0						
Concrete cone failure		R60	0,4	0,8 / 2,0	2,2 / 3,3	3,0 / 5,0	4,5 / 6,8	8,6	
		R90		0,5 / 2,0					
		R120	0,3	0,3 / 1,6	1,7 / 2,6	2,4 / 4,0	3,6 / 5,4	6,9	
								9,6	

**Table C3.2: Characteristic values of shear resistance under fire exposure**

Size	FAZ II, FAZ II R, FAZ II HCR	R30		R60	
		V <sub>Rk,s,fi,30</sub> [kN]	M <sup>0</sup> <sub>Rk,s,fi,30</sub> [Nm]	V <sub>Rk,s,fi,60</sub> [kN]	M <sup>0</sup> <sub>Rk,s,fi,60</sub> [Nm]
h <sub>ef</sub> ≥	M6	40	0,6 <sup>1)</sup> / 0,9 <sup>2)</sup>	0,5 <sup>1)</sup> / 0,2 <sup>2)</sup>	0,4 <sup>1)</sup> / 0,9 <sup>2)</sup>
	M8	35	1,8	1,4	1,6
	M10	40	3,6	2,9	3,0
	M12	50	6,3	7,8	4,9
	M16	65	11,7	19,9	9,1
	M20	100	18,2	39,0	14,2
	M24	125	26,3	67,3	20,5
Size	FAZ II, FAZ II R, FAZ II HCR	R90		R120	
		V <sub>Rk,s,fi,90</sub> [kN]	M <sup>0</sup> <sub>Rk,s,fi,90</sub> [Nm]	V <sub>Rk,s,fi,120</sub> [kN]	M <sup>0</sup> <sub>Rk,s,fi,120</sub> [Nm]
		40	0,3 <sup>1)</sup> / 0,9 <sup>2)</sup>	0,2 <sup>1)</sup> / 0,1 <sup>2)</sup>	0,2 <sup>1)</sup> / 0,7 <sup>2)</sup>
		35	1,3	1,0	1,2
		40	2,2	2,4	1,9
		50	3,5	5,0	2,8
		65	6,6	12,6	5,3
h <sub>ef</sub> ≥	M20	100	10,3	24,6	8,3
	M24	125	14,8	42,6	11,9

Concrete prout failure according to EN 1992-4:2018

**Table C3.3: Minimum spacings and minimum edge distances of anchors under fire exposure for tension and shear load**

Size	FAZ II, FAZ II R, FAZ II HCR							
	M6	M8	M10	M12	M16	M20	M24	
Spacing	S <sub>min</sub>	Annex B3						
Edge distance	c <sub>min</sub> [mm]	$c_{min} = 2 \cdot h_{ef}$ , for fire exposure from more than one side $c_{min} \geq 300$ mm						

<sup>1)</sup> FAZ II

<sup>2)</sup> FAZ II R / HCR

fischer Bolt Anchor FAZ II, FAZ II R, FAZ II HCR

**Performances**

Characteristic values of resistance under fire exposure

**Annex C 3**

Appendix 14/ 16

**Table C4.1: Characteristic values of tension and shear resistance under seismic action category C1**

Size	FAZ II, FAZ II R, FAZ II HCR							
	M6	M8	M10	M12	M16	M20	M24	
Length of anchor	$L_{\max}$ [mm]	-	167	186	221	285	394	477
Effective embedment depth			45	40 - 60	50 - 70	65 - 85	100	125
With filling of the annular gap	$\alpha_{\text{gap}}$ [-]					1,0		
<b>Steel failure</b>								
Characteristic resistance tension load C1	$N_{Rk,s,C1}$ [kN]	-	16,0	27,0	41,0	66,0	111,0	150,0
Partial factor for steel failure	$\gamma_{Ms,C1}^{1)}$ [-]					1,5		
<b>Pullout failure</b>								
Characteristic resistance tension load in cracked concrete C1	$N_{Rk,p,C1}$ [kN]	-	4,6	8,0	16,0	28,2	36,0	50,3
Installation factor	$\gamma_{\text{inst}}$ [-]					1,0		
<b>Steel failure without lever arm</b>								
Characteristic resistance shear load C1	$V_{Rk,s,C1}$ [kN]	-	11	17	27	47	56	69
Partial factor for steel failure	$\gamma_{Ms,C1}^{1)}$ [-]					1,25		

<sup>1)</sup> In absence of other national regulations

**Table C4.2: Characteristic values of tension and shear resistance under seismic action category C2**

Size	FAZ II, FAZ II R, FAZ II HCR <sup>1)</sup>							
	M6	M8	M10	M12	M16	M20	M24	
Length of anchor	$L_{\max}$ [mm]	-	186	221	285	394	-	
With filling of the annular gap	$\alpha_{\text{gap}}$ [-]				1,0			
<b>Steel failure</b>								
Characteristic resistance tension load C2	$N_{Rk,s,C2}$ [kN]	-	27	41	66	111	-	
Partial factor for steel failure	$\gamma_{Ms,C2}^{2)}$ [-]				1,5			
<b>Pullout failure</b>								
Characteristic resistance tension load in cracked concrete C2	$h_{\text{ef}}$ [mm]	-	60	70	85	100	-	
	$N_{Rk,p,C2}$ [kN]		5,1	7,4	21,5	30,7		
	$h_{\text{ef}}$ [mm]		40-59	50-69	65-84	-		
	$N_{Rk,p,C2}$ [kN]		2,7	4,4	16,4			
Installation factor	$\gamma_{\text{inst}}$ [-]				1,0			
<b>Steel failure without lever arm</b>								
Characteristic resistance shear load C2	$h_{\text{ef}}$ [mm]	-	60	70	85	100	-	
	$V_{Rk,s,C2}$ [kN]		10,0	17,4	27,5	39,9		
	$h_{\text{ef}}$ [mm]		40-59	50-69	65-84	-		
	$V_{Rk,s,C2}$ [kN]		7,0	12,7	22,0			
Partial factor for steel failure	$\gamma_{Ms,C2}^{2)}$ [-]				1,25			

<sup>1)</sup> FAZ II HCR: Only valid for cold-formed version (according to Annex A1)

<sup>2)</sup> In absence of other national regulations

fischer Bolt Anchor FAZ II, FAZ II R, FAZ II HCR

#### Performances

Characteristic values of resistance under tension and shear loads under seismic action

#### Annex C 4

Appendix 15/16

**Table C5.1:** Displacements under static and quasi static **tension** loads

Size	FAZ II, FAZ II R, FAZ II HCR						
	M6	M8	M10	M12	M16	M20	M24
<b>Displacement – factor for tensile load<sup>1)</sup></b>							
δN₀ - factor	in cracked concrete [mm/kN]	0,13	0,22	0,12	0,09	0,08	0,07
δN∞ - factor		1,00	0,78	0,40	0,19	0,09	0,07
δN₀ - factor		0,16	0,07	0,05	0,06	0,05	0,04
δN∞ - factor		0,24	0,29	0,21	0,14	0,10	0,06

**Table C5.2:** Displacements under static and quasi static **shear** loads

Size	FAZ II						
	M6	M8	M10	M12	M16	M20	M24
<b>Displacement – factor for shear load<sup>2)</sup></b>							
δv₀ - factor	in cracked and uncracked concrete [mm/kN]	0,6	0,35	0,37	0,27	0,10	0,09
δv∞ - factor		0,9	0,52	0,55	0,40	0,14	0,15
δv₀ - factor		0,6	0,23	0,19	0,18	0,10	0,11
δv∞ - factor		0,9	0,27	0,22	0,16	0,11	0,05
<b>FAZ II R, FAZ II HCR</b>							
δv₀ - factor		0,6	0,23	0,19	0,18	0,10	0,07
δv∞ - factor		0,9	0,27	0,22	0,16	0,11	0,09

<sup>1)</sup> Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0} - \text{factor} \cdot N_{ED}$$

$$\delta_{N\infty} = \delta_{N\infty} - \text{factor} \cdot N_{ED}$$

(N<sub>ED</sub>: Design value of the applied tension force)

<sup>2)</sup> Calculation of effective displacement:

$$\delta_{v0} = \delta_{v0} - \text{factor} \cdot V_{ED}$$

$$\delta_{v\infty} = \delta_{v\infty} - \text{factor} \cdot V_{ED}$$

(V<sub>ED</sub>: Design value of the applied shear force)

**Table C5.3:** Displacements under **tension** loads for **category C2** for all embedment depths

Size	FAZ II, FAZ II R, FAZ II HCR						
	M6	M8	M10	M12	M16	M20	M24
Displacement DLS	δ <sub>N,C2(DLS)</sub> [mm]	-	2,7	4,4		5,6	-
Displacement ULS			11,5	13,0	12,3	14,4	

**Table C5.4:** Displacements under **shear** loads for **category C2** for all embedment depths

Size	FAZ II, FAZ II R, FAZ II HCR						
	M6	M8	M10	M12	M16	M20	M24
Displacement DLS	δ <sub>v,C2 (DLS)</sub> [mm]	-	4,1	4,7	5,5	4,8	-
Displacement ULS			6,2	7,8	10,1	11,2	

fischer Bolt Anchor FAZ II, FAZ II R, FAZ II HCR

#### Performances

Displacements under tension and shear loads

#### Annex C 5

Appendix 16/ 16