

DECLARAȚIA DE PERFORMANȚĂ

DoP 0370

pentru Șurub de beton fischer ULTRACUT FBS II R (Ancore din metal pentru utilizare în beton)

RO

- | | |
|--|---|
| 1. <u>Cod unic de identificare al produsului-tip:</u> | DoP 0370 |
| 2. <u>Utilizare (utilizări) preconizată (preconizate):</u> | Prindere cu instalare ulterioară în beton fisurat sau nefisurat, consultați suplimentul, în special anexele B1 - B5. |
| 3. <u>Fabricant:</u> | fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Germany |
| 4. <u>Reprezentant autorizat:</u> | – |
| 5. <u>Sistemul (sistemele) de evaluare și de verificare a constanței performanței:</u> | 1 |
| 6. <u>Documentul de evaluare european:</u> | EAD 330232-01-0601 |
| Evaluarea tehnică europeană: | ETA-17/0740; 2025-01-08 |
| Organismul de evaluare tehnică: | DIBt- Deutsches Institut für Bautechnik |
| Organism (organisme) notificat(e): | 2873 TU Darmstadt |

7. Performanța (performanțe) declarată (declare):

Rezistență mecanică și stabilitate (BWR 1)

Rezistența caracteristică la întindere (pentru încărcări statice și cvasistatice) Metoda A:

Rezistența la cedarea oțelului: Anexele C1

Rezistența la smulgere: Anexele C1

Rezistența la cedarea conului de beton: Anexele C1

Robustețe: Anexele C1

Distanța minimă față de margine și între ancore: Anexele C4

Distanța față de margine pentru a preveni fisuri sub încărcare: Anexele C1

Rezistența caracteristică la forfecare (pentru încărcări statice și cvasistatice):

Rezistența la cedarea oțelului (rezistența la forfecare): Anexele C1

Rezistența la cedarea cu braț de levier: Anexele C1

Rezistența caracteristică pentru un design simplificat:

Metoda B: NPD

Metoda C: NPD

Deplasări:

Deplasări sub încărcări statice și cvasistatice: Anexele C4

Rezistență caracteristică și Deplasări pentru performanță seismică de categoriile C1 și C2:

Rezistența la întindere, deplasări, categoria C1: Anexa C2

Rezistența la întindere, deplasări, categoria C2: Anexa C2

Rezistența la forfecare, deplasări, categoria C1: Anexa C2

Rezistența la forfecare, deplasări, categoria C2: Anexa C2

Factor gol circular: Anexa C2

Siguranța în caz de incendiu (BWR 2)

Reacție la foc: Clasa (A1)

Rezistența la incendiu:

Rezistența la foc în ipoteza cedării oțelului (rezistența la întindere): Anexa C3

Rezistența la foc în ipoteza cedării prin smulgere (rezistența la întindere): Anexa C3

Rezistența la foc în ipoteza cedării oțelului (rezistența la forfecare): Anexa C3


Durabilitate:

Durabilitate: Anexele B1

8. Documentație tehnică adecvată și/sau documentație tehnică specifică: –

Performanța produsului identificat mai sus este în conformitate cu setul de performanțe declarate. Această declarație de performanță este eliberată în conformitate cu Regulamentul (UE) nr. 305/2011, pe răspunderea exclusivă a fabricantului identificat mai sus.

Semnată pentru și în numele fabricantului de către:

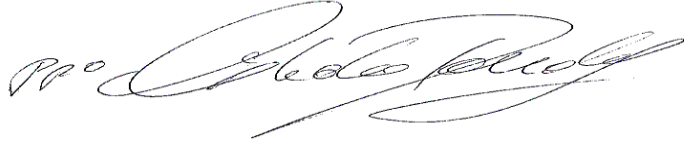

Dr. Ronald Mihala, Șef al departamentului de dezvoltare și management al producției
Tumlingen, 2025-02-03



Dieter Pfaff, Șeful Federației Internaționale de Producție și Managementul Calității

Această declarație de performanță a fost întocmită în mai multe limbi. În cazul unei divergențe de interpretare, versiunea în limba engleză prevalează întotdeauna.

Suplimentul include informații voluntare și complementare în limba engleză, în afara cerințelor legale (specificate neutru din punct de vedere al limbii).

Translation guidance Essential Characteristics and Performance Parameters for Annexes

Ghid de traducere a caracteristicilor esențiale și a parametrilor de performanță pentru anexe

Mechanical resistance and stability (BWR 1)		
Rezistență mecanică și stabilitate (BWR 1)		
Characteristic resistance under static and quasi-static loading, Method A		
Rezistența caracteristică la întindere (pentru încărcări statice și cvasistatice) Metoda A:		
1	Resistance to steel failure: Rezistența la cedarea oțelului:	$N_{Rk,s}$ [kN], E_s [N/mm ²]
2	Resistance to pull- out failure: Rezistența la smulgere:	$N_{Rk,p}$ [kN], ψ_c
3	Resistance to concrete cone failure: Rezistența la cedarea conului de beton:	$k_{cr,N}$, $k_{ucr,N}$ [-], h_{ef} , $c_{cr,N}$ [mm]
4	Robustness: Robustețe:	γ_{inst} [-]
5	Minimum edge distance and spacing: Distanța minimă față de margine și între ancore:	c_{min} , s_{min} , h_{min} [mm]
6	Edge distance to prevent splitting under load: Distanța față de margine pentru a preveni fisuri sub încărcare:	$N^0_{Rk,sp}$ [kN], $c_{cr,sp}$ [mm]
Characteristic resistance to shear load (static and quasi-static loading), Method A		
Rezistența caracteristică la forfecare (pentru încărcări statice și cvasistatice):		
7	Resistance to steel failure under shear load: Rezistența la cedarea oțelului (rezistența la forfecare):	$V^0_{Rk,s}$ [kN], $M^0_{Rk,s}$ [Nm], k_7 [-]
8	Resistance to pry-out failure: Rezistența la cedarea cu braț de levier:	k_8 [-]
Characteristic Resistance for simplified design		
Rezistență caracteristică pentru un design simplificat:		
9	Method B: Metoda B:	F^0_{Rk} [kN], c_{cr} , s_{cr} [mm]
10	Method C: Metoda C:	F_{Rk} [kN]
Displacements		
Deplasări:		
11	Displacements under static and quasi-static loading: Deplasări sub încărcări statice și cvasistatice:	δ_{N0} , $\delta_{N\infty}$, δ_{V0} , $\delta_{V\infty}$ [mm]
12	Stiffness characteristics for tension loading for non-linear spring models:	$k_{1,ucr}$, $k_{2,ucr}$, $k_{3,ucr}$, $k_{4,ucr}$, $k_{1,cr}$, $k_{2,cr}$, $k_{3,cr}$, $k_{4,cr}$ [kN/mm]
Characteristic resistance and displacements for seismic performance categories C1 and C2		
Rezistență caracteristică și Deplasări pentru performanță seismică de categoriile C1 și C2:		
13	Resistance to tension load, displacements, category C1: Rezistența la întindere, deplasări, categoria C1:	$N_{Rk,s,C1}$ [kN], $N_{Rk,p,C1}$ [kN]
	Resistance to tension load, displacements, category C2: Rezistența la întindere, deplasări, categoria C2:	$N_{Rk,s,C2}$ [kN], $N_{Rk,p,C2}$ [kN], $\delta_{N,C2}$ [mm]
14	Resistance to shear load, displacements, category C1: Rezistența la forfecare, deplasări, categoria C1:	$V_{Rk,s,C1}$ [kN]
	Resistance to shear load, displacements, category C2: Rezistența la forfecare, deplasări, categoria C2:	$V_{Rk,s,C2}$ [kN], $\delta_{V,C2}$ [mm]
15	Factor for annular gap Factor gol circular:	α_{gap} [-]
Safety in case of fire (BWR 2)		
Siguranța în caz de incendiu (BWR 2)		
16	Reaction to fire: Reacție la foc:	Class
Resistance to fire:		
Rezistența la incendiu:		
17	Fire resistance to steel failure (tension load): Rezistența la foc în ipoteza cedării oțelului (rezistența la întindere):	$N_{Rk,s,fi}$ [kN]
18	Fire resistance to pull-out failure (tension load): Rezistența la foc în ipoteza cedării prin smulgere (rezistența la întindere):	$N_{Rk,p,fi}$ [kN]
19	Fire resistance to steel failure (shear load): Rezistența la foc în ipoteza cedării oțelului (rezistența la forfecare):	$V_{Rk,s,fi}$ [kN], $M^0_{Rk,s,fi}$ [Nm]
Aspects of durability		
Durabilitate:		
20	Durability: Durabilitate:	Class

II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT

1 Technical description of product and intended use

Technical description of the product

fischer concrete screw UltraCut FBS II R is a concrete screw made of stainless steel. The anchor is installed in a drilled hole and anchored by mechanical interlock.

An illustration of the product is given in Annex A.

The characteristic material values, dimensions and tolerances of the anchors not indicated in Annexes shall correspond to the respective values laid down in the technical documentation of this European Technical Assessment.

The anchors are intended to be used with embedment depth given in Annex B, Table B2.1. The intended use specifications of the product are detailed in the Annex B1.

2 Specification of the intended use in accordance with the applicable European Assessment Document (hereinafter EAD)

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The provisions made in this European Technical Assessment are based on an assumed intended working life of the anchor of 50 years.

The indications given on the working life cannot be interpreted as a guarantee given by the producer or Assessment Body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Characteristics of product

Mechanical resistance and stability (BWR 1):

The essential characteristics are detailed in the Annex C1, C2 and C4.

Safety in case of fire (BWR 2):

The essential characteristics are detailed in the Annex C3.

Durability:

See annex B1.

Other Basic Requirements are not relevant.

3.2 Methods of assessment


The assessment of fitness of the anchor for the intended use in relation to the requirements for mechanical resistance and stability and safety in use in the sense of the Basic Works Requirement 1 has been made in accordance with EAD 330232-01-0601; Mechanical fasteners for use in concrete.

4 Assessment and verification of constancy of performance (hereinafter AVCP) system applied, with reference to its legal base.


4.1 AVCP system

According to the decision 1996/582/EC of the European Commission, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No. 305/2011) is 1.


Product in the installed condition

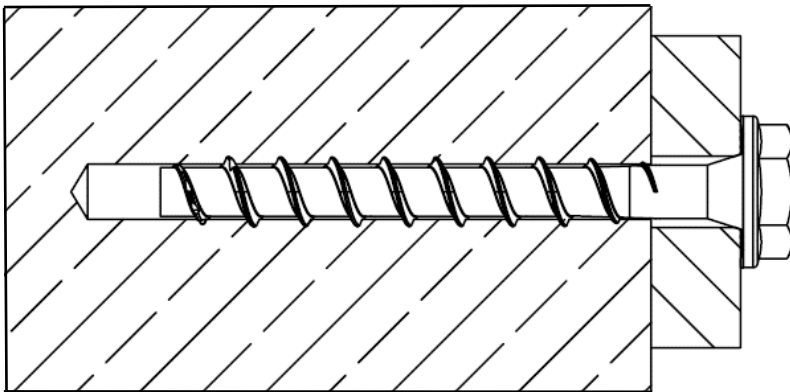

FBS II US R/
FBS II US TX R

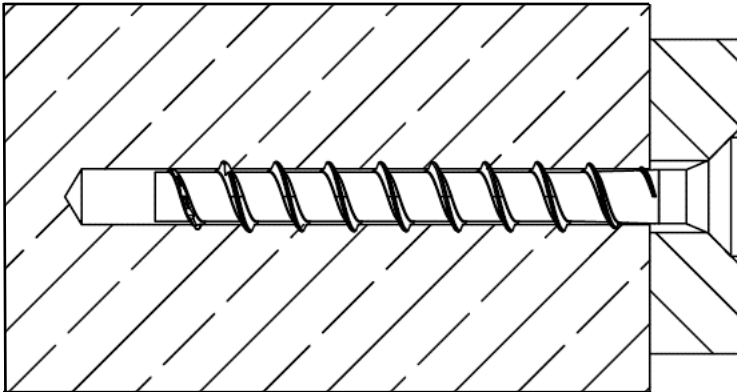

FBS II SK R

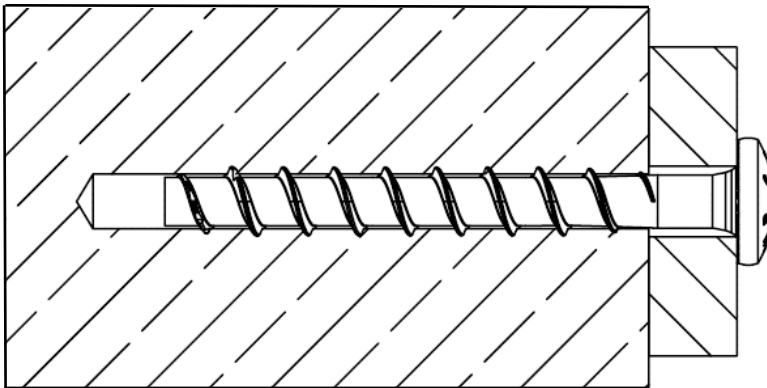

FBS II P R

(Figure not to scale)





fischer concrete screw UltraCut FBS II R

Product description


Product in the installed condition

Annex A 1

Appendix 4 / 14

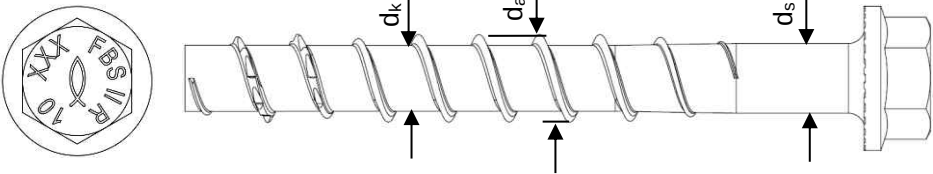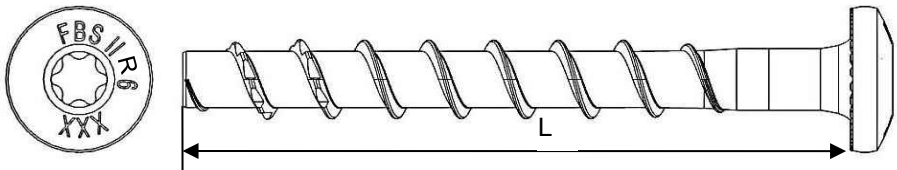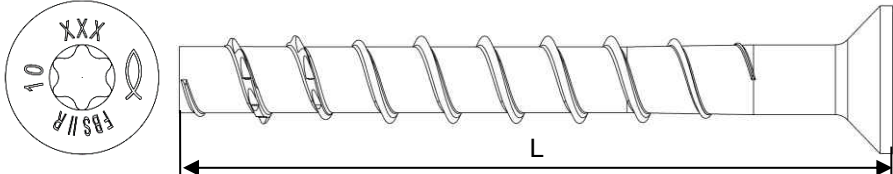Table A2.1: Geometry and material						
Type of screw / size			FBS II US R / FBS II SK R / FBS II P R			
			6	8	10	12
Thread outer diameter	d _a	[mm]	7,8	10,3	12,5	14,6
Core diameter	d _k		5,6	7,5	9,4	11,1
Shaft diameter	d _s		6,0	8,0	9,9	11,7
Material			Tip: hardened steel; Shaft and head: stainless steel EN 10088-1:2023			
Coating			Tip: red colour			
Hexagon head with formed washer (US/US TX)						
Pan head (P)						
Countersunk Head (SK)						
Head Marking (example) FBS II: Product short name R: Material type XXX: Screw length L e.g. 10: Screw size 						
(Figure not to scale)						
fischer concrete screw UltraCut FBS II R					Annex A 2 Appendix 5 / 14	
Product description Geometry and material						

Specification of intended use:

Size	FBS II R								
	6	8		10			12		
Nominal embedment depth [mm]	60	50	65	55	65	85	60	75	100
Hammer drilling 	✓								
Hollow drilling 	- 1)	✓							
Diamond drilling 									
Static and quasi-static loads	✓								
Cracked and uncracked concrete									
Fire exposure									
Seismic performance category C1	✓	- 1)	✓	- 1)	✓	- 1)	✓	- 1)	✓
Seismic performance category C2	- 1)								

¹⁾ No performance assessed

Base materials:

- Compacted reinforced or unreinforced normal weight concrete without fibres (cracked or uncracked) according to EN 206:2013+A2:2021
- Strength classes C20/25 to C50/60 according to EN 206:2013+A2:2021

Use conditions (Environmental conditions):

- Structures subjected to dry internal conditions (FBS II R)
- For all other conditions according to EN 1993-1-4:2006 + A1:2015, corresponding to corrosion resistance class
- CRC III: for FBS II R

Design:

- The structural design according to EN 1992-4:2018 are conducted under responsibility of a designer experienced in the field of anchorages and concrete works.
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the fastener is indicated on the design drawings (e.g. position of the screw relative to reinforcement or to supports, etc.).
- Design of fastenings according to EN 1992-4:2018 and EOTA Technical Report TR 055:2018

fischer concrete screw UltraCut FBS II R

Intended use

Specification of intended use


Annex B 1

Appendix 6 / 14

Table B2.1: Installation parameters

FBS II R			6	8		10			12		
Nominal embedment depth	h_{nom}	[mm]	60	50	65	55	65	85	60	75	100
Nominal drill hole diameter	d_0		6	8		10			12		
Cutting diameter of drill bits	$d_{cut} \leq$		6,40	8,45		10,45			12,50		
Cutting diameter for diamond drillers			- 1)	8,10		10,30			12,30		
Clearance hole diameter			d_f	8,0	10,6 – 12,0		12,8 – 14,0			14,8 – 16,0	
Wrench size (US)	SW		10 / 13	13		15			17		
TX-size (SK / P / US TX))	TX	[-]	30	40		50			-		
Countersunk head diameter	d_h	[mm]	13,3	18		21					
Countersunk diameter in fixture	d_c		15,2	20		23					
Drill hole depth	$h_1 \geq$		70	60	75	65	75	95	70	85	110
Drill hole depth (with adjustable setting)			- 1)	70	85	75	85	105	80	95	120
Thickness of fixture			$t_{fix} \leq$	L - h_{nom}							
Length of screw	$L_{min} =$		65	50	65	55	65	85	60	75	100
	$L_{max} =$	400	400	415	405	415	435	410	425	450	
Torque impact screw driver	$T_{imp,max}$	[Nm]	240	450					650		
Torque impact screw driver (with adjustable setting process)	$T_{imp,max}$		- 1)	300					450		

1) No performance assessed

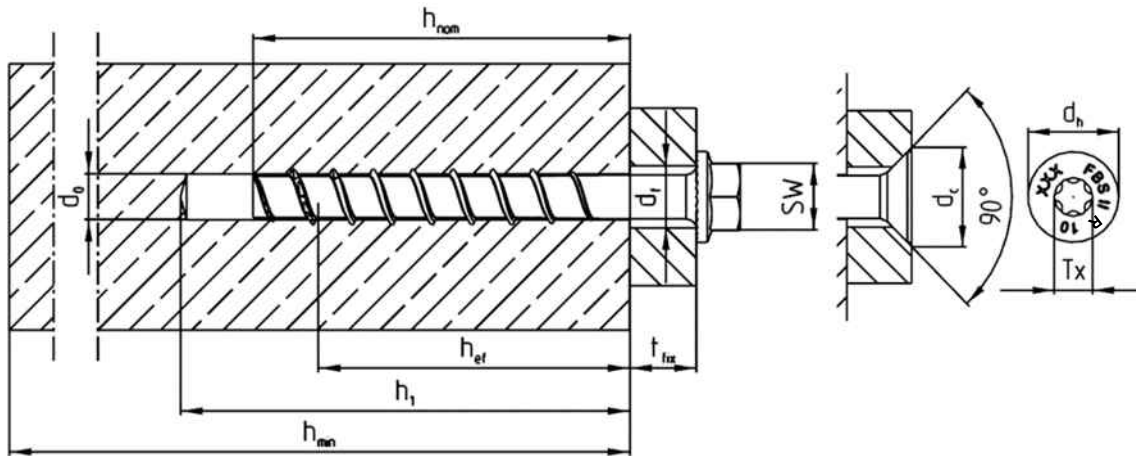

(Figure not to scale)


fischer concrete screw UltraCut FBS II R

Intended use
Installation parameters

Annex B 2

Appendix 7 / 14


Installation instruction part 1 FBS II 8/10/12 R



Step 1: Drilling of the hole:



Drill the hole using hammer drill, hollow drill or diamond core drill

Drill hole diameter d_0 and drill hole depth h_1 according to table B2.1





Step 2: Cleaning of the drill hole - horizontal:

Clean the drill hole. This step can be omitted in the preparation of the hole by using a hollow drill bit or diamond core drill. (recommendation: use the fischer FHD hollow drill bit)



Step 2: Cleaning of the drill hole - vertical:

Cleaning of the drill hole can be omitted, if drilling vertically upwards or if drilling vertically downwards and the hole depth has been increased. It is recommended to increase the drill hole depth by an additional $3 \times \text{drilling } \varnothing$ when drilling vertically downwards.




Step 3: Installation:

Turn in until the head is in contact with the fixture.

Installation with any torque impact screw driver up to the maximum mentioned torque moment ($T_{\text{imp,max}}$ according to table B2.1).

Alternatively, all other tools without an indicated torque moment are allowed (e.g. ratchet spanner). The indicated torque moments $T_{\text{imp,max}}$ for impact screw driver are not decisive for manual installation.



Step 4: Checking of the correct installation:



After installation a further turning of the screw must not be possible. The head of the screw must be in contact with the fixture and is not damaged

fischer concrete screw UltraCut FBS II R

Intended use
Installation Instructions


Annex B 3

Appendix 8 / 14

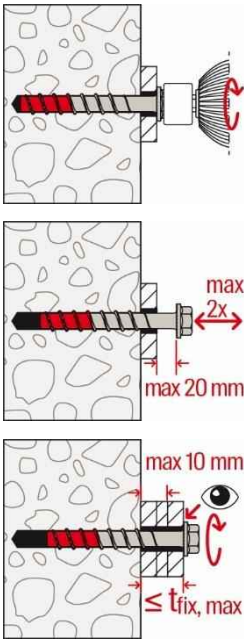	Adjustment Optional: It is permissible to adjust the screw twice. Therefore, the screw may be untightened to a maximum of $L_{adj} = 20 \text{ mm}$ off the surface of the initial fixture. The total permissible thickness of shims added during the adjustment process is $t_{adj} = 10 \text{ mm}$. The required nominal anchoring depth h_{nom} must be kept after the adjustment process. (see also annex B 3)
	Filling of the annular gap For seismic performance category C2 applications: The gap between screw shaft and fixture must be filled with mortar; mortar compressive strength $\geq 50 \text{ N/mm}^2$ (e. g. FIS V Plus, FIS HB, FIS SB or FIS EM Plus). As an aid for filling the gap, the filling disc FFD is recommended.

fischer concrete screw UltraCut FBS II R	Annex B 4 Appendix 9 / 14
Intended use Installation Instructions	


Installation instruction FBS II 6 R



Step 1: Drilling of the hole:


Drill the hole using hammer drill

Drill hole diameter d_0 and
drill hole depth h_1 according to table B2.1



Step 2: Cleaning of the drill hole:


Clean the drill hole.



Step 3: Installation:

Turn in until the head is in contact with the fixture.

Installation with any torque impact screw driver up to the
maximum mentioned torque moment ($T_{imp,max}$ according to
table B2.1).



Step 4: Checking of the correct installation:

After installation a further turning of the screw must not be
possible. The head of the screw must be in contact with the
fixture and is not damaged

fischer concrete screw UltraCut FBS II R

Intended use
Installation Instructions

Annex B 5

Appendix 10 / 14

Table C1.1: Characteristic values for static and quasi-static action

FBS II R				6	8		10			12		
Nominal embedment depth		h_{nom}	[mm]	60	50	65	55	65	85	60	75	100
Steel failure for tension load and shear load												
Characteristic resistance		$N_{Rk,s}$	[kN]	19,3	27,8		43,8			67,7		
Partial factor		$\gamma_{Ms,N}$	-	1,5								
Characteristic resistance		$V^0_{Rk,s}$	[kN]	12,6	18,0	27,8	13,2	19,3	36,6	20,4	40,1	45,8
Partial factor		$\gamma_{Ms,V}$	[-]	1,25								
Factor for ductility		k_7		0,75								
Characteristic bending resistance		$M^0_{Rk,s}$	[Nm]	16,1	31,3		68,5			112,8		
Pullout failure												
Characteristic resistance in concrete C20/25	uncracked	$N_{Rk,p}$	[kN]	10,0	7,0	14,0	8,5	14,0	$\geq N^0_{Rk,c^{(1)}}$	10,0	12,0	$\geq N^0_{Rk,c^{(1)}}$
	cracked	$N_{Rk,p}$	[kN]	4,0	4,0	9,0	4,5	6,0	16,0	4,5	11,0	$\geq N^0_{Rk,c^{(1)}}$
Increasing factors concrete	C25/30	ψ_c	[-]	1,07	1,12							
	C30/37			1,22								
	C35/45			1,32								
	C40/50			1,41								
	C45/55			1,50								
	C50/60			1,58								
Installation factor		γ_{inst}	[-]	1,4	1,0							
Concrete cone failure and splitting failure; concrete pryout failure												
Effective embedment depth		h_{ef}	[mm]	37	40	52	43	51	68	47	60	81
Factor for uncracked concrete		$k_{ucr,N}$	[-]	11,0								
Factor for cracked concrete		$k_{cr,N}$		7,7								
Characteristic edge distance		$c_{cr,N}$	[mm]	$1,5 \cdot h_{ef}$								
Characteristic spacing		$s_{cr,N}$		$3 \cdot h_{ef}$								
Characteristic resistance for splitting		$N^0_{Rk,sp}$	[kN]	$\min\{N^0_{Rk,c}, N_{Rk,p}\}$	12,0	18,4	13,0	17,9	$\geq N^0_{Rk,c^{(1)}}$	15,8	22,9	$\geq N^0_{Rk,c^{(1)}}$
Characteristic edge distance for splitting		$c_{cr,sp}$	[mm]	$1,78 \cdot h_{ef}$	$1,5 \cdot h_{ef}$							
Characteristic spacing for splitting		$s_{cr,sp}$		$3 \cdot h_{ef}$								
Factor for pryout failure		k_8	[-]	2,6	1,0			2,0	1,0	2,0		
Installation factor		γ_{inst}		1,4 ²⁾	1,0							
Concrete edge failure												
Effective length in concrete		l_f	[mm]	46	50	65	55	65	85	60	75	100
Nominal diameter of screw		d_{nom}		6	8		10			12		
Adjustment												
Maximum thickness of shims		t_{adj}	[mm]	- ³⁾	10							
Maximum number of adjustments		n_a	[-]	- ³⁾	2							

1) $N^0_{Rk,C}$ according to EN 1992-4:2018

²⁾ Only for concrete cone failure and splitting failure; concrete pryout failure according to EN 1992-4:2018, Table 4.1

3) No performance assessed

fischer concrete screw UltraCut FBS II R	Annex C 1 Appendix 11 / 14
Performances Characteristic values for static and quasi-static action	

Table C2.1: Characteristic values for Seismic Performance Category C1							
FBS II R			6	8	10	12	
Nominal embedment depth		h_{nom}	[mm]	60	65	85	100
Steel failure for tension load and shear load C1							
Characteristic resistance		$N_{Rk,s,C1}$	[kN]	19,3	27,8	43,8	67,7
		$V_{Rk,s,C1}$		7,5	18,1	29,3	36,6
Without filling of the annular gap		α_{gap}	[-]	0,5			
With filling of the annular gap ¹⁾				1,0			
Pullout failure							
Characteristic resistance in cracked concrete		$N_{Rk,p,C1}$	[kN]	3,5	9,0	16,0	$\geq N^0_{Rk,c}$ ²⁾
Concrete cone failure							
Effective embedment depth		h_{ef}	[mm]	37	52	68	81
Concrete cone failure	Edge distance	$c_{cr,N}$		$1,5 \cdot h_{ef}$			
	Spacing	$s_{cr,N}$		$3 \cdot h_{ef}$			
Installation factor		γ_{inst}	[-]	1,4	1,0		
Concrete pryout failure							
Factor for pryout failure		k_8	[-]	2,6	1,0	2,0	
Concrete edge failure							
Effective length in concrete		l_f	[mm]	46	65	85	100
Nominal diameter of screw		d_{nom}		6	8	10	12
¹⁾ Filling of the annular gap according to annex B 4							
²⁾ $N^0_{Rk,c}$ according to EN 1992-4:2018							

Table C2.2: Characteristic values for Seismic Performance Category C2							
FBS II R			6	8	10	12	
Nominal embedment depth		h_{nom}	[mm]	- ²⁾	65	85	100
Steel failure for tension load and shear load C2							
Characteristic resistance		$N_{Rk,s,C2}$	[kN]	- ²⁾	27,8	43,8	67,7
		$V_{Rk,s,C2}$			9,7	8,8	19,7
With filling of the annular gap ¹⁾		α_{gap}	[-]	1,0			
Pullout failure							
Characteristic resistance in cracked concrete		$N_{Rk,p,C2}$	[kN]	- ²⁾	2,8	5,0	7,3
Concrete cone failure							
Effective embedment depth		h_{ef}	[mm]	- ²⁾	52	68	81
Concrete cone failure	Edge distance	$c_{cr,N}$		- ²⁾	$1,5 \cdot h_{ef}$		
	Spacing	$s_{cr,N}$			$3 \cdot h_{ef}$		
Installation factor		γ_{inst}	[-]	1,0			
Concrete pryout failure							
Factor for pryout failure		k_8	[-]	- ²⁾	1,0	2,0	
Concrete edge failure							
Effective length in concrete		$l_f = h_{nom}$	[mm]	- ²⁾	65	85	100
Nominal diameter of screw		d_{nom}			8	10	12
¹⁾ Filling of the annular gap according to annex B 4. Application without filling of the annular gap not allowed.							
²⁾ No performance assessed							

fischer concrete screw UltraCut FBS II R		Annex C 2
Performances		
Characteristic values for Seismic Performance Category C1 and C2		Appendix 12 / 14

Table C3.1: Characteristic values for resistance to fire

FBS II R			6	8		10			12			
Nominal embedment depth		h_{nom}	[mm]	60	50	65	55	65	85	60	75	100
Steel failure for tension load and shear load ($F_{Rk,s,fi} = N_{Rk,s,fi} = V_{Rk,s,fi}$)												
Characteristic resistance for the head shapes	US US TX ≥SW13	$F_{Rk,s,fi}$	R30	[kN]	2,1	2,3	6,4	3,5		11,0	4,6	15,2
			R60		1,7	1,8	4,7	2,7		8,1	3,7	11,2
			R90		1,2	1,3	2,9	2,0		5,2	2,7	7,3
			R120		1,0	1,0	2,0	1,6		3,8	2,2	5,3
	SK/P ¹⁾ US SW10 ¹⁾	$F_{Rk,s,fi}$	R30	[kN]	1,8	2,1		3,0			No performance assessed	
			R60		1,4	1,7		2,3				
			R90		1,1	1,2		1,6				
			R120		0,9	1,0		1,2				
	US US TX ≥SW13	$M^0_{Rk,s,fi}$	R30	[Nm]	1,7	2,6	7,2	7,6		15,4	16,8	25,3
			R60		1,4	2,0	5,2	6,0		11,4	13,3	18,7
			R90		1,0	1,5	3,3	4,4		7,3	9,8	12,1
			R120		0,8	1,2	2,3	3,6		5,3	8,0	8,8
	SK/P ¹⁾ US SW10 ¹⁾	$M^0_{Rk,s,fi}$	R30	[Nm]	1,5	2,4		4,2			No performance assessed	
			R60		1,2	1,9		3,2				
			R90		0,9	1,4		2,2				
			R120		0,7	1,1		1,7				

Pullout failure												
Characteristic resistance	$N_{Rk,p,fi}$	R30	[kN]	1,0	1,7	2,4	2,1	3,5	4,3	2,5	3,0	6,3
		R60										
		R90										
		R120										

Concrete cone failure												
Characteristic resistance	$N_{Rk,c,fi}$	R30	[kN]	1,4	1,6	3,4	2,1	3,2	6,6	2,6	4,8	10,2
		R60										
		R90										
		R120										

Edge distance												
R30 to R120		$C_{cr,fi}$	[mm]	$2 \cdot h_{ef}$								
In case of fire attack from more than one side, the minimum edge distance shall be ≥ 300 mm												

Spacing												
R30 to R120		$S_{cr,fi}$	[mm]	$2 \cdot C_{cr,fi}$								

Concrete pryout failure												
R30 to R120		k_8	[-]	2,6	1,0			2,0	1,0	2,0		
The anchorage depth has to be increased for wet concrete by at least 30 mm compared to the given value.												
¹⁾ Only FBS II R												

fischer concrete screw UltraCut FBS II R								Annex C 3				
Performances Characteristic values for resistance to fire												
Appendix 13 / 14												

Table C4.1: Displacements due to tension loads (static and quasi-static)											
FBS II R			6	8		10			12		
Nominal embedment depth	h_{nom}	[mm]	60	50	65	55	65	85	60	75	100
Tension load in uncracked concrete	N	[kN]	5,0	3,5	7,1	4,2	7,0	11,9	5,0	6,0	17,1
Displacement in uncracked concrete	δ_{N0}	[mm]	0,1	0,5	0,7	0,4	0,6	0,8	1,0	0,9	1,25
	$\delta_{N\infty}$		0,4	0,7	0,7	0,8	0,8	0,8	1,25	1,25	1,25
Tension load in cracked concrete	N	[kN]	2,8	3,5	4,5	4,2	7,0	8,1	5,0	6,0	12,0
Displacement in cracked concrete	δ_{N0}	[mm]	0,1	0,6	0,4	0,4	0,6	0,7	0,9	0,9	1,4
	$\delta_{N\infty}$		0,5	1,5	1,1	1,0	1,8	1,8	1,4	1,7	1,9

Table C4.2: Displacements due to shear loads (static and quasi-static)											
FBS II R			6	8		10			12		
Nominal embedment depth	h_{nom}	[mm]	60	50	65	55	65	85	60	75	100
Shear load in cracked and uncracked concrete	V	[kN]	7,8	11,0	15,9	10,4	11,9	20,9	12,7	24,9	26,2
Displacement (the gap between fastener and fixture is subtracted)	δ_{V0}	[mm]	2,2	4,1	2,7	1,2	1,2	3,5	1,1	2,5	2,9
	$\delta_{V\infty}$		3,4	6,2	4,1	1,8	1,8	5,3	1,7	3,8	4,4

Table C4.3: Displacements due to tension loads (Seismic Performance Category C2)											
FBS II R			6	8		10			12		
Nominal embedment depth	h_{nom}	[mm]	- ¹⁾	65		85			100		
Displacement DLS	$\delta_{N,C2} \text{ (DLS)}$			0,9		0,9			1,1		
Displacement ULS	$\delta_{N,C2} \text{ (ULS)}$			2,5		2,7			3,2		

Table C4.4: Displacements due to shear loads (Seismic Performance Category C2)											
FBS II R			6	8		10			12		
Nominal embedment depth	h_{nom}	[mm]	- ¹⁾	65		85			100		
Displacement DLS	$\delta_{V,C2} \text{ (DLS)}$			1,6		1,7			2,6		
Displacement ULS	$\delta_{V,C2} \text{ (ULS)}$			5,0		3,8			6,6		

¹⁾ No performance assessed

Table C4.5: Minimum thickness of concrete members, minimum spacing and edge distance											
FBS II R			6	8		10			12		
Nominal embedment depth	h_{nom}	[mm]	60	50	65	55	65	85	60	75	100
Minimum thickness of concrete member	h_{min}		100	100	120	100	120	140	110	130	150
Minimum spacing	s_{min}		35			40			50		
Minimum edge distance	c_{min}		35			40			50		

fischer concrete screw UltraCut FBS II R		Annex C 4 Appendix 14 / 14
Performances		
Displacements due to tension and shear loads; Minimum thickness of concrete members, minimum spacing and edge distance		