

## IZJAVA O LASTNOSTIH

### DoP 0269

Udarno fischer Ceiling Anchor FDZ (Mehansko sidro za uporabo v betonu)

SL

1. Enotna identifikacijska oznaka tipa proizvoda: DoP 0269
2. Predvidena uporaba: Naknadno nameščen pritrdilni element za uporabo v betonu za nestrukturne sisteme, glej dodatek, zlasti priloge B1 - B2.
3. Proizvajalec: fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Nemčija
4. Pooblaščen zastopnik: -
5. Sistemi ocenjevanja in preverjanja nespremenljivosti lastnosti: 2+
6. Evropski ocenjevalni dokument: ETAG 001, Part 6, April 2013, uporaba za EAD  
Evropska tehnična ocena: ETA-17/0737; 2018-01-30  
Organ za tehnično ocenjevanje: DIBt- Deutsches Institut für Bautechnik  
Priglašeni organi: 2873 TU Darmstadt
7. Navedene lastnosti:  
**Varnost pri uporabi (BWR 4)**  
**Karakteristična odpornost na napetostno obremenitev (statična in kvazistatična obremenitev):**  
Odpornost pri odpovedi jekla: NPD  
Odpornost na izvlek: NPD  
Odpornost na odpoved v betonski coni: NPD  
Robusnost: Priloge C1  
Najmanjša razdalja do roba betona in razmik: Prilogah B2, C1  
Razdalja od roba betona za preprečevanje loma pod obremenitvijo: NPD  
  
**Karakteristična odpornost proti strižni obremenitvi (statična in kvazistatična obremenitev):**  
Odpornost na odpoved jekla (strižna obremenitev): Priloge C1  $V_{Rk,s}=NPD$ ;  $k_7=NPD$   
Odpornost na neuspešno odstranitev: NPD  
Odpornost na odpoved od roba betona: NPD  
  
**Karakteristična odpornost za vse smeri obremenitve in načine odpovedi na poenostavljeno zasnovi:**  
Karakteristična odpornost: Priloge C1  
  
**Trajnost:**  
Trajnost: Priloge B1  
  
**Varnost v primeru požara (BWR 2)**  
Odzivnost na ogenj: Razred (A1)  
**Odpornost proti ognju:**  
Požarna odpornost pri odpovedi jekla (napetostna obremenitev): NPD  
Požarna odpornost pri izvleku (napetostna obremenitev): NPD  
Požarna odpornost pri odpovedi jekla (strižna obremenitev): NPD  
Požarna odpornost za vse smeri obremenitve in načine okvare: Priloge C1
8. Ustrezna tehnična dokumentacija in/ali specifična tehnična dokumentacija: -

Lastnosti proizvoda, navedenega zgoraj, so v skladu z navedenimi lastnostmi. Za izdajo te izjave o lastnostih je v skladu z Uredbo (EU) št. 305/2011 odgovoren izključno proizvajalec, naveden zgoraj.

Podpisal za in v imenu proizvajalca:



Dr.-Ing. Oliver Geibig, Generalni direktor poslovne enote in inženiringa  
Tumlingen, 2021-01-11



Jürgen Grün, Generalni direktor za kemijo in kvaliteto

Ta izjava o lastnostih je bila pripravljena v različnih jezikih. V primeru nerazumevanja, se vedno upošteva angleška različica.

Priloga vsebuje informacije v angleškem jeziku, ki presegajo zakonske zahteve.

## Specific Part

### 1 Technical description of the product

The fischer Ceiling Anchor FDZ is an anchor made of galvanized steel which is placed into a drilled hole and anchored by deformation-controlled expansion.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

The essential characteristics regarding mechanical resistance and stability are included under the Basic Works Requirement Safety in use.

#### 3.2 Safety in case of fire (BWR 2)

| Essential characteristic | Performance                                 |
|--------------------------|---------------------------------------------|
| Reaction to fire         | Anchorage satisfy requirements for Class A1 |
| Resistance to fire       | See Annex C 1                               |

#### 3.3 Safety in use (BWR 4)

| Essential characteristic              | Performance   |
|---------------------------------------|---------------|
| Characteristic resistance in concrete | See Annex C 1 |

### 4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with guideline for European technical approval ETAG 001, April 2013 used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011 the applicable European legal act is: [97/161/EC].

The system to be applied is: 2+

Product installation conditions, product marking and product dimensions


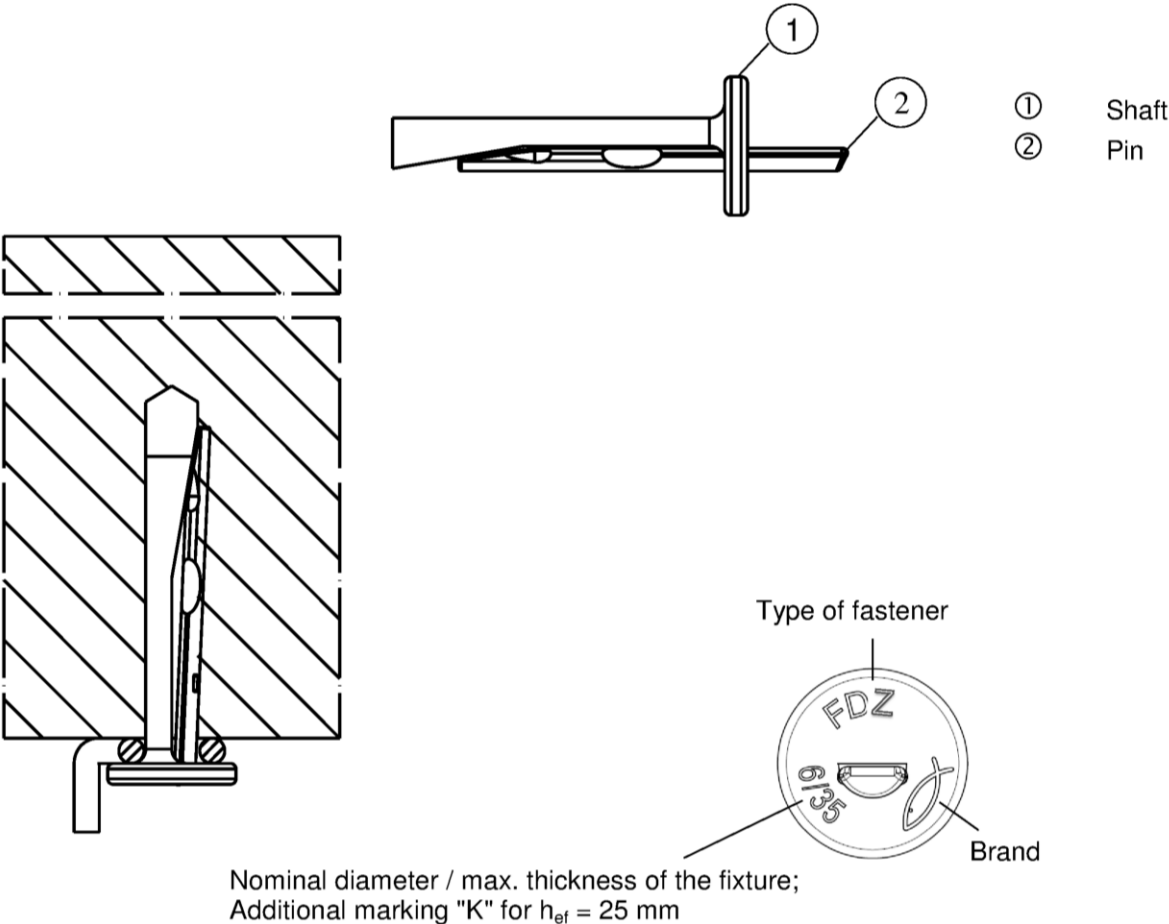


Table A1.1: Dimensions

| Size                                                                                 | FDZ   |     |        |      |
|--------------------------------------------------------------------------------------|-------|-----|--------|------|
|                                                                                      | 6/5 K | 6/5 | 6/35 K | 6/35 |
| Length of the <div>pin <math>L_1</math></div> <div>shaft <math>L_2</math></div> [mm] | 36    | 43  | 66     | 73   |
| Diameter of the head $D \geq$                                                        | 13    |     |        |      |

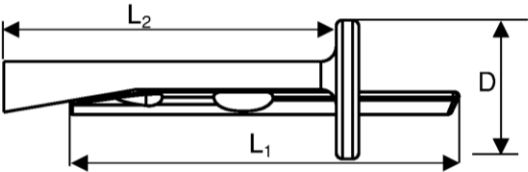

(Fig. not to scale)

fischer Ceiling Anchor FDZ

Product description

Product installation conditions, product marking and product dimensions

Annex A 1

Appendix 2 / 5

## Specifications of intended use

### Anchorage subject to:

|                                                                                       |       |
|---------------------------------------------------------------------------------------|-------|
| Size                                                                                  | FDZ 6 |
| Static and quasi-static loads                                                         | ✓     |
| Use for multiple fixture of non-structural applications according to ETAG 001, Part 6 |       |
| Fire exposure                                                                         |       |

### Base materials:

- Reinforced and unreinforced normal weight concrete according to EN 206-1:2000
- Strength classes C12/15 to C50/60 according to EN 206-1:2000
- Cracked and non-cracked concrete

### Use conditions (Environmental conditions):

- Anchorage subject to dry internal conditions

### Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings have to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages under static or quasi-static actions have to be designed for Design Method C in accordance with:
  - ETAG 001, Annex C, Design Method C, Edition August 2010
  - CEN/TS 1992-4:2009
- Anchorages under fire exposure have to be designed in accordance with
  - EOTA Technical Report TR 020, Edition May 2004
  - CEN/TS 1992-4:2009, Annex D (it must be ensured that local spalling of the concrete cover does not occur)

**fischer Ceiling Anchor FDZ**

**Intended use**


Specifications

**Annex B 1**

Appendix 3 / 5


**Table B2.1:** Installation parameters

| Size                                      |                       |        | FDZ   |     |        |      |
|-------------------------------------------|-----------------------|--------|-------|-----|--------|------|
|                                           |                       |        | 6/5 K | 6/5 | 6/35 K | 6/35 |
| Thickness of the fixture                  | $t_{fix}$             | $\leq$ | 5     |     | 35     |      |
| Nominal drill hole diameter               | $d_0$                 |        | 6     |     |        |      |
| Diameter of clearance hole in the fixture | $d_f$                 | $\leq$ | 7     |     |        |      |
| Maximum bit diameter                      | $d_{cut,max}$         | [mm]   | 6,40  |     |        |      |
| Effective embedment depth                 | $h_{ef}$              |        | 25    | 32  | 25     | 32   |
| Depth of drill hole                       | with hole cleaning    |        | 30    | 37  | 30     | 37   |
| to deepest point                          | without hole cleaning |        | 35    | 42  | 35     | 42   |
| Minimum thickness of concrete member      | $h_{min}$             |        | 80    |     |        |      |

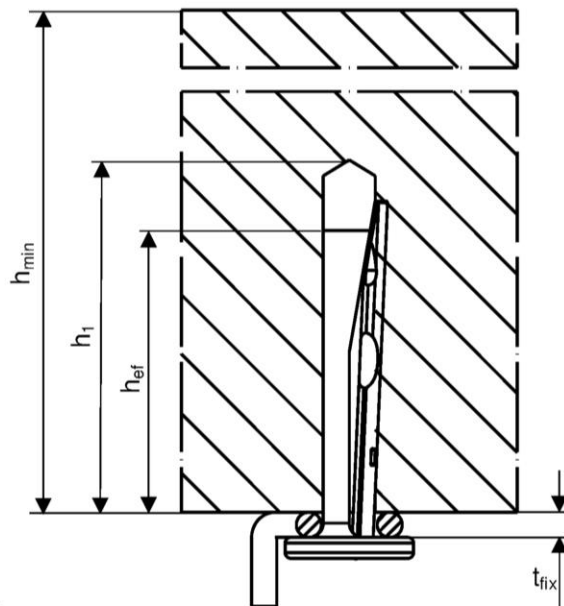


### Installation instructions



- Hammer or hollow drilling only
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Positioning of the drill holes without damaging the reinforcement
- In case of aborted hole: New drilling at a minimum distance twice the depth of aborted hole away of or smaller distance if the aborted hole is filled with high strength mortar and if under shear or oblique tension load it is not in the direction of the load application



1: Drill the hole



2: Set the fastener

3: Set the pin, until  
flush to the surface

4: Installed fastener

(Fig. not to scale)

### fischer Ceiling Anchor FDZ

#### Intended use

Installation parameters and installation instructions

### Annex B 2

Appendix 4 / 5

| Table C1.1: Characteristic resistance                         |                  |                        |      |
|---------------------------------------------------------------|------------------|------------------------|------|
| Size                                                          |                  | FDZ 6                  |      |
| For all load directions and for all failures modes            |                  |                        |      |
| Effective embedment depth                                     |                  | $h_{ef}$ [mm]          |      |
|                                                               |                  | 25                     | 32   |
| Characteristic resistance in cracked and non-cracked concrete | C12/15           | $F_{Rk}$ [kN]          | 1,0  |
|                                                               | C20/25 to C50/60 |                        | 1,5  |
| Characteristic                                                | edge distance    | $C_{cr,N} = C_{min}$   | [mm] |
|                                                               | spacing          | $S_{cr,N} = S_{min}$   |      |
|                                                               |                  | 70                     | 60   |
|                                                               |                  | 60                     | 50   |
| Partial safety factor                                         |                  | $\gamma_M^{2)}$ [-]    | 1,5  |
| Shear load with lever arm                                     |                  |                        |      |
| Characteristic bending resistance                             |                  | $M^0_{Rk,s}$ [Nm]      | 4,4  |
| Partial safety factor for steel failure                       |                  | $\gamma_{Ms}^{1)}$ [-] | 1,25 |

<sup>1)</sup> In absence of other national regulations

<sup>2)</sup> The installation safety factor  $\gamma_2 = \gamma_{inst} = 1,0$  is included

**Table C1.2:** Characteristic resistance under fire exposure for all effective embedment depths

| Size                                     |                  |      | FDZ 6 |
|------------------------------------------|------------------|------|-------|
| Steel failure for tension and shear load |                  |      |       |
| R30                                      | $F_{Rk,s,fi30}$  | [kN] | 1,00  |
| R60                                      | $F_{Rk,s,fi60}$  |      | 0,50  |
| R90                                      | $F_{Rk,s,fi90}$  |      | 0,34  |
| R120                                     | $F_{Rk,s,fi120}$ |      | 0,26  |
| R180                                     | $F_{Rk,s,fi180}$ |      | 0,17  |
| Characteristic resistance                |                  |      |       |
| Spacing and edge distance                |                  |      |       |
| R30 – R120                               | $s_{cr,fi}$      | [mm] | 200   |
|                                          | $c_{cr,fi}$      |      | 150   |

For fire exposure from more than one side  $c_{min} \geq 300$  mm

**fischer Ceiling Anchor FDZ**

**Performances**

Characteristic resistance and characteristic resistance under fire exposure

**Annex C 1**

Appendix 5 / 5