

IZJAVA O LASTNOSTIH

DoP 0263

za fischer sidro za visoke obremenitve TAM, TAM S, TAM T (Mehansko sidro za uporabo v betonu)

SL

1. Enotna identifikacijska oznaka tipa proizvoda: DoP 0263
2. Predvidena uporaba: Za vgradnjo v razpokan beton, glej dodatek, glej dodatek, zlasti priloge B1 - B3.
3. Proizvajalec: fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Nemčija
4. Pooblaščen zastopnik: -
5. Sistemi ocenjevanja in preverjanja nespremenljivosti lastnosti: 1
6. Evropski ocenjevalni dokument: EAD 330232-00-0601
Evropska tehnična ocena: ETA-04/0003; 2018-06-12
Organ za tehnično ocenjevanje: DIBt- Deutsches Institut für Bautechnik
Priglašeni organi: 2873 TU Darmstadt

7. Navedene lastnosti:

Mehanska odpornost in stabilnost (BWR 1)

Karakteristična odpornost na napetostno obremenitev (statična in kvazistatična obremenitev):

Odpornost pri odpovedi jekla: Priloge C1

$E_s = 210\,000\text{ MPa}$

Odpornost na izvlek: Priloge C1

Odpornost na odpoved v betonski coni: Priloge C1

Robusnost: Priloge C1

Najmanjša razdalja do roba betona in razmik: Priloge B2

Razdalja od roba betona za preprečevanje loma pod obremenitvijo: Priloge C1

$N_{Rk,sp}^{0} = \text{NPD}$

Karakteristična odpornost proti strižni obremenitvi (statična in kvazistatična obremenitev):

Odpornost na odpoved jekla (strižna obremenitev): Priloge C2

Odpornost na neuspešno odstranitev: Priloge C2

Odpornost na odpoved od roba betona: Priloge C2

Premiki pri statični in kvazistatični obremenitvi: Priloge C2

Trajnost: Priloge A3, A4, B1

Karakteristična odpornost in premiki za kategoriji seizmičnih lastnosti C1 in C2:

Odpornost pri odpovedi jekla: NPD

Odpornost pri izvleku: NPD

Raztezek pred zlomom: NPD

Faktor reže obroča: NPD

Premiki: NPD

Varnost v primeru požara (BWR 2)

Odzivnost na ogenj: Razred (A1)

Odpornost proti ognju:

Požarna odpornost pri odpovedi jekla (napetostna obremenitev): NPD

Požarna odpornost pri izvleku (napetostna obremenitev): NPD

Požarna odpornost pri odpovedi jekla (strižna obremenitev): NPD

8. Ustrezna tehnična dokumentacija in/ali specifična tehnična dokumentacija:

-

Lastnosti proizvoda, navedenega zgoraj, so v skladu z navedenimi lastnostmi. Za izdajo te izjave o lastnostih je v skladu z Uredbo (EU) št. 305/2011 odgovoren izključno proizvajalec, naveden zgoraj.

Podpisal za in v imenu proizvajalca:



Dr.-Ing. Oliver Geibig, Generalni direktor poslovne enote in inženiringa
Tumlingen, 2021-01-12

Jürgen Grün, Generalni direktor za kemijo in kvaliteto

Ta izjava o lastnostih je bila pripravljena v različnih jezikih. V primeru nerazumevanja, se vedno upošteva angleška različica.

Priloga vsebuje informacije v angleškem jeziku, ki presegajo zakonske zahteve.

Specific Part

1 Technical description of the product

The fischer Heavy-duty anchor TA M, TA M S and TA M T in the range of M6, M8, M10 and M12 is an anchor made of galvanised steel which is placed into a drilled hole and anchored by torque-controlled expansion with the hexagon head bolt.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the concrete screw is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead the assumption of working life of the concrete screw of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	see Annex C 1
Characteristic resistance to shear load (static and quasi-static loading)	see Annex C 2
Displacements (static and quasi-static loading)	see Annex C 2
Characteristic resistance and displacements for seismic performance categories C1 and C2	No performance assessed

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	No performance assessed

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base


In accordance with European Assessment Documents EAD No. 330232-00-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

Pre-positioned installation:


TA M

The hexagon head screw and the washer according to table A4.1 and A4.2 must be provided by the user

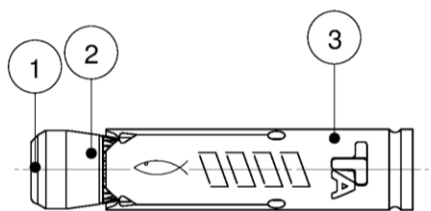


TA M S

The hexagon head screw is provided by the manufacturer (fischer) together with the anchor

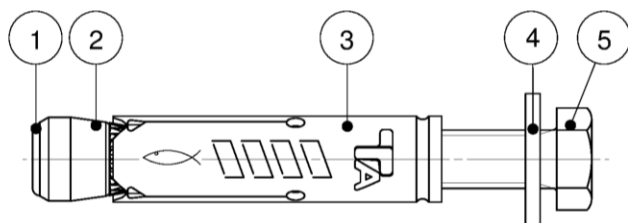

In-place installation:

TA M T

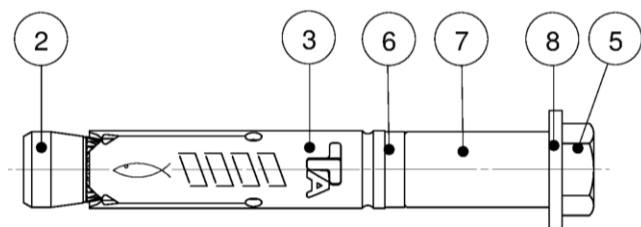

- | | |
|--------------------------|----------------------|
| 1 Plastic cap (optional) | 5 Hexagon head screw |
| 2 Cone-nut | 6 Distance ring |
| 3 Expansion sleeve | 7 Spacing sleeve |
| 4 Washer (TA M / TA M S) | 8 Washer (TA M T) |

(Fig. not to scale)


fischer Heavy-duty anchor TA M, TA M S, TA M T

Product description
Anchor types


Annex A 1

Appendix 2 / 10

TA M / TA M S

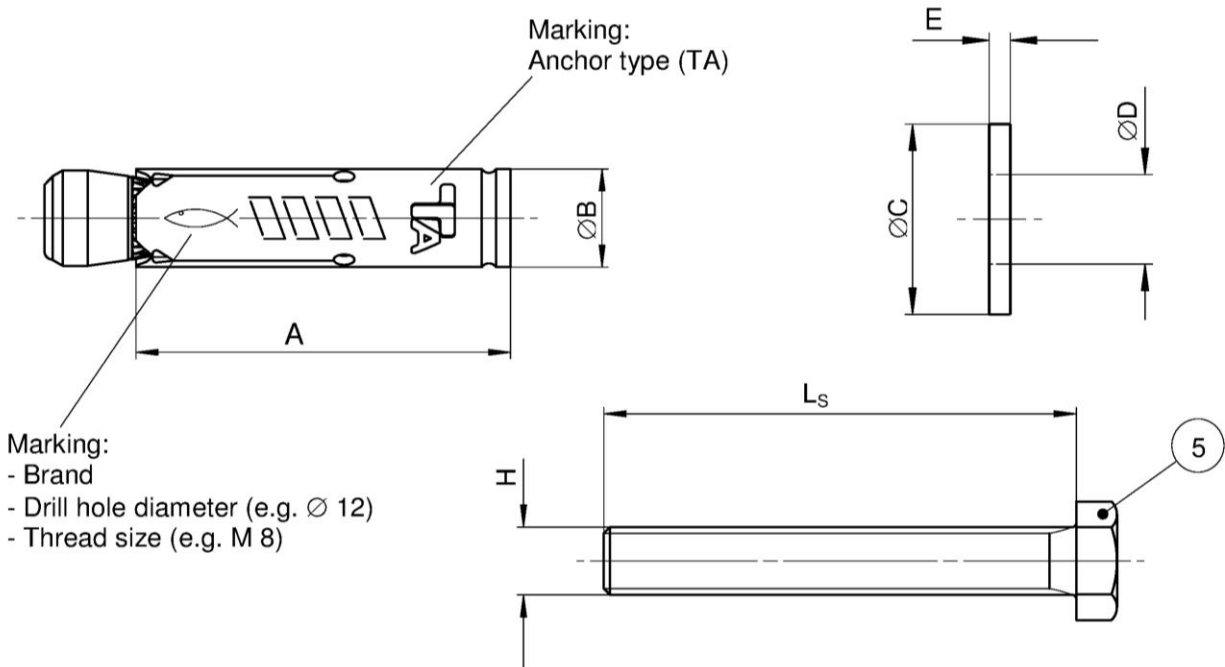

TA M T

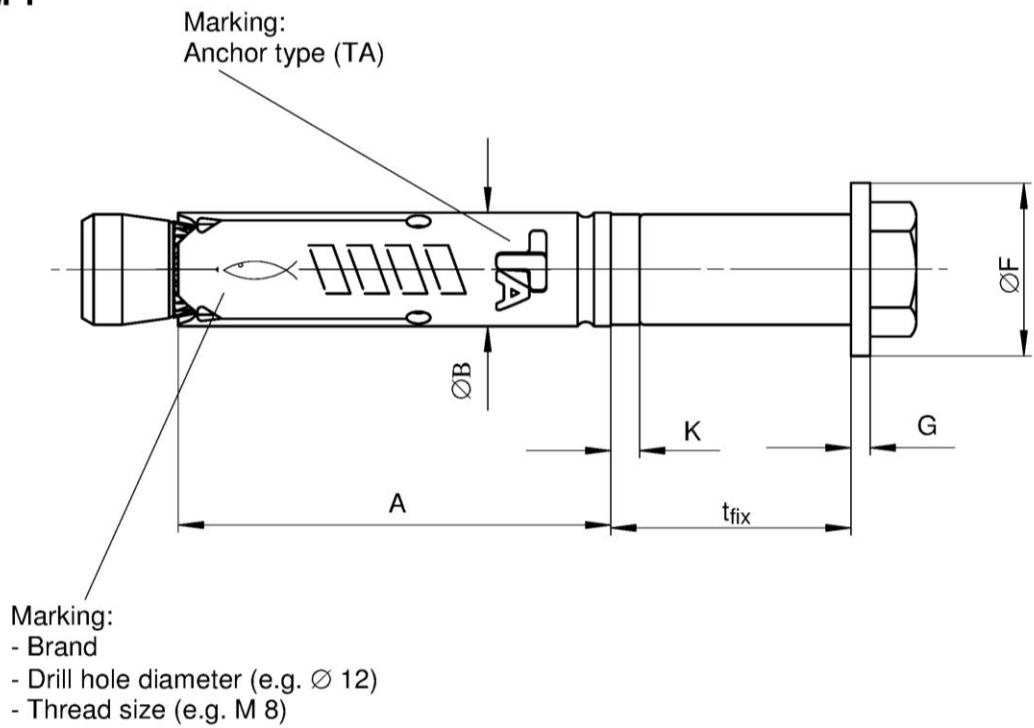

(Fig. not to scale)

fischer Heavy-duty anchor TA M, TA M S, TA M T

Product description
Anchor components

Annex A 2

Appendix 3 / 10

Table A3.1: Anchor dimensions [mm]

Part	Designation	Type of anchor		M6	M8	M10	M12
3	Expansion sleeve	TA M / TA M S / TA M T	A	40,0	45,0	55,0	70,0
			Ø B	9,6	11,8	14,5	17,5
4	Washer ¹⁾	TA M S	Ø C ≥	11,0	15,0	19,0	23,0
			E ≥	1,4	1,4	1,8	2,3
8	Washer	TA M T	Ø F ≥	17,0	21,0	25,0	30,0
			G ≥	1,4	1,8	2,3	2,7
5	Hexagon head screw ²⁾	TA M S / TA M T	L _s ≥	t _{fix} + 50	t _{fix} + 55	t _{fix} + 70	t _{fix} + 85
			H	M6	M8	M10	M12
6	Distance ring	TA M T	K =	3,0	3,0	3,0	3,0

¹⁾ For specification - summary of washer for TA M see table A4.2

²⁾ For specification - summary of hexagon head screw for TA M see table A4.1

Table A3.2: Materials

Part	Designation	Type of anchor	Materials	Treatment
1	Plastic cap ¹⁾	TA M / TA M S	Polyamide	-
2	Cone-nut	TA M / TA M S / TA M T	Steel, EN 10277:2008	Zinc plated according to EN ISO 4042:2017, min 5 µm, additional functional coating
3	Expansion sleeve	TA M / TA M S / TA M T	Cold-rolled steel EN 10139:2016	Zinc plated according to EN ISO 4042:2017, min 5 µm
4	Washer ²⁾	TA M S	Steel, min 140 HV	
8	Washer	TA M T		
5	Hexagon head screw ³⁾	TA M S / TA M T	Steel, property class 8.8	
6	Distance ring	TA M T	Polyethylen	-
7	Distance sleeve	TA M T	Cold-rolled steel EN 10139:2016/ Steel EN 10 277:2008	Zinc plated according to EN ISO 4042:2017, min 5 µm

¹⁾ Optional

²⁾ For specification - summary of washer for TA M see table A4.2

³⁾ For specification - summary of hexagon head screw for TA M see table A4.1

fischer Heavy-duty anchor TA M, TA M S, TA M T

Product description

Anchor dimensions

Materials

Annex A 3


Appendix 4 / 10

Table A4.1: Selection criteria for the hexagon head screw (TA M)

Description			TA M6	TA M8	TA M10	TA M12
Length of hexagon head screw	L_S	[mm]	$\geq t_{fix} + 50$	$\geq t_{fix} + 55$	$\geq t_{fix} + 70$	$\geq t_{fix} + 85$
Thread size	H	[-]	M6	M8	M10	M12
Standardisation			ISO 4014:2017 / ISO 4017:2014 or DIN 931:1987 / DIN 933:1987			
Material			Steel, property class 8.8			
Treatment			Zinc plated according to EN ISO 4042:2017, min 5 μm			

Table A4.2: Selection criteria for the washer (TA M)

Description			TA M6	TA M8	TA M10	TA M12
Hole diameter	D	min	6,0	8,0	10,0	12,0
		max	6,6	8,6	10,8	13,3
External diameter	C	[mm]	≥ 11,0	≥ 15,0	≥ 19,0	≥ 23,0
Thickness	E	min	1,4	1,4	1,8	2,3
		max	3,0	3,0	4,0	5,0
Material			Steel, hardness class min 140 HV			
Treatment			Zinc plated according to EN ISO 4042:2017, min 5 µm			

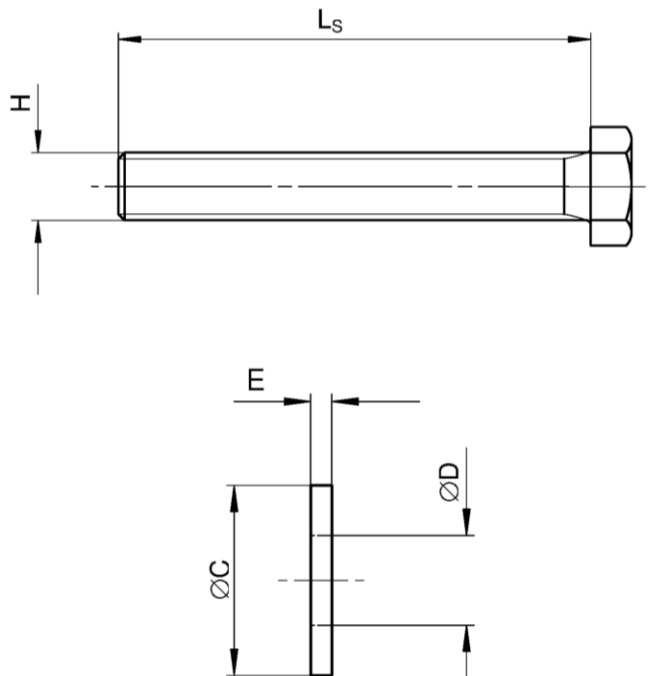

(Fig. not to scale)

fischer Heavy-duty anchor TA M, TA M S, TA M T**Product description**

Dimensions

Materials

Annex A 4

Appendix 5 / 10

Specifications of intended use

fischer Heavy-duty anchor	TA M6	TA M8	TA M10	TA M12
Steel, zinc plated			✓	
Static and quasi-static loads			✓	
Uncracked concrete			✓	

Base materials:

- Normal weight concrete according to EN 206-1:2000
- Strength classes C20/25 to C50/60 according to EN 206-1:2000

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions

Design:

- Anchorages have to be designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings have to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.)
- Design of fastenings according to FprEN 1992-4: 2016 and EOTA Technical Report TR 055

Installation:

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- Hammer or hollow drilling according to Annex B3
- Drill hole created perpendicular +/- 5° to concrete surface, positioning without damaging the reinforcement
- In case of aborted hole: new drilling at a minimum distance twice the depth of the aborted drill hole or smaller distance if the aborted drill hole is filled with high strength mortar and if under shear or oblique tension load it is not in the direction of load application

fischer Heavy-duty anchor TA M, TA M S, TA M T



Intended use
Specifications

Annex B 1

Appendix 6 / 10

Table B2.1: Installation parameters for TA M / TA M S / TA M T

Anchor size			TA M6	TA M8	TA M10	TA M12
Nominal drill hole diameter	d_0	[mm]	10	12	15	18
Maximum drill bit diameter	$d_{cut} \leq$		10,45	12,50	15,50	18,50
Length of hexagon head screw	$L_S \geq$		$t_{fix} + 50$	$t_{fix} + 55$	$t_{fix} + 70$	$t_{fix} + 85$
Depth of drill hole (TA M / TA M S)	$h_1 \geq$		$L_s - t_{fix} + 15$		$L_s - t_{fix} + 20$	
Depth of drill hole (TA M T)	h_1		$L_s + 10$			
Diameter of clearance hole in the fixture (TA M / TA M S)	$d_f \leq$		7	9	12	14
Diameter of clearance hole in the fixture (TA M T)	d_f		12	14	18	20
Thickness of fixture	$t_{fix,min}$		1			
	$t_{fix,max}$		150	200	250	300
Required torque moment	T_{inst}	[Nm]	10	20	40	75

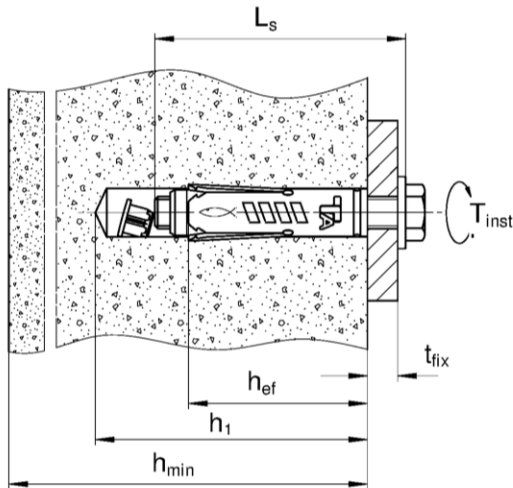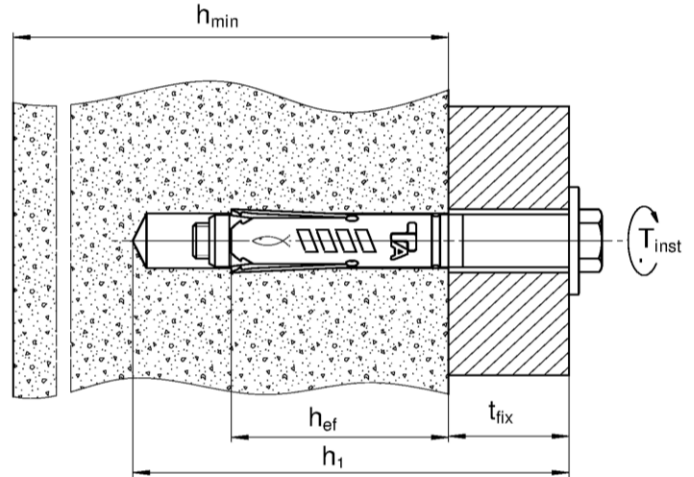TA M / TA M S:**TA M T:** L_s = Length of hexagon head screw h_{ef} = Effective embedment depth t_{fix} = Thickness of the fixture h_{min} = Minimum thickness of concrete member h_1 = Depth of drill hole to deepest point T_{inst} = Required setting torque**Table B2.2:** Minimum thickness of concrete member, minimum spacing and minimum edge distances

Anchor size		TA M6	TA M8	TA M10	TA M12
Minimum thickness of concrete member	h_{min}	100	100	110	140
Minimum spacing	s_{min} [mm]	80	90	110	160
Minimum edge distance	c_{min}	50	60	70	120

(Fig. not to scale)

fischer Heavy-duty anchor TA M, TA M S, TA M T**Intended Use**

Installation instructions


Minimum thickness of concrete member, minimum spacing and minimum edge distance

Annex B 2

Appendix 7 / 10


Installation instruction

Pre-positioned installation TA M / TA M S

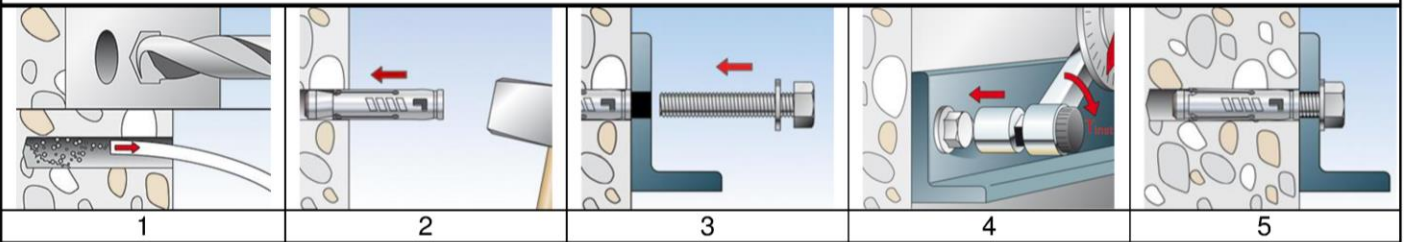

No.	Description	
1	Create drill hole with hammer drill, clean bore hole	Create drill hole with hollow drill and vacuum cleaner
2	Set the fastener	
3	Attach the fixture and turn the screw in	
4	Apply required torque moment T_{inst}	
5	Installed fastener	

Push-through installation TA M T

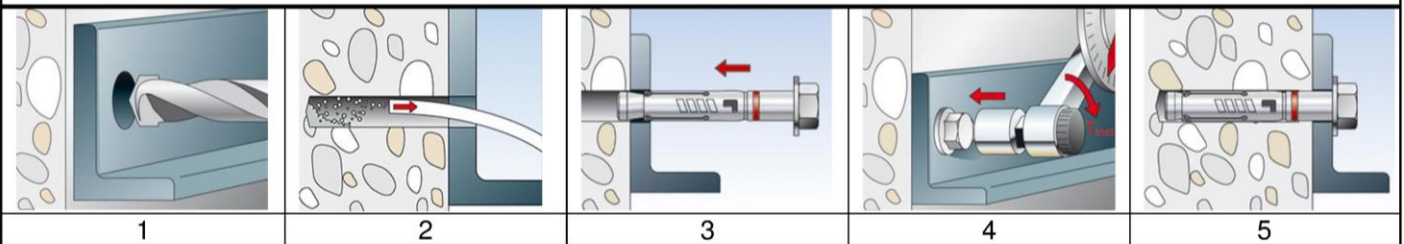

No.	Description	
1	Create drill hole with hammer drill	Create drill hole with hollow drill and vacuum cleaner
2	Clean bore hole	-
3	Set the fastener	
4	Apply required torque moment T_{inst}	
5	Installed fastener	

Types of drills

Hammer drill



Hollow drill



fischer Heavy-duty anchor TA M, TA M S, TA M T

Intended use
Installation instruction

Annex B 3

Appendix 8 / 10

Table C 1.1: Characteristic tension resistance under static and quasi-static loads							
Anchor size			TA M6	TA M8	TA M10	TA M12	
Steel failure							
Characteristic resistance property class 8.8	$N_{Rk,s}$	[kN]	16,1	29,3	46,4	67,4	
Partial factor	$\gamma_{Ms}^{1)}$	[-]	1,5				
Pull-out failure							
Characteristic resistance in uncracked concrete	$N_{Rk,p}$	[kN] C20/25	7,5	12	20	25	
Increasing factors for $N_{Rk,p}$ for uncracked concrete	ψ_c	C25/30	1,12				
		C30/37	1,22				
		C35/45	1,32				
		C40/50	1,41				
		C45/55	1,50				
		C50/60	1,58				
Installation factor	γ_{inst}	[-]	1,0				
Concrete cone failure and splitting failure							
Effective embedment depth	h_{ef}	[mm]	40	45	55	70	
Factor k_1	$k_{ucr,N}$	[-]	11,0 ²⁾				
Spacing (concrete cone failure)	$s_{cr,N}$	[mm]	120	135	220	210	
Edge distance (concrete cone failure)	$c_{cr,N}$		60	68	110	105	
Spacing (splitting)	$s_{cr,sp}$		120	180	330	420	
Edge distance (splitting)	$c_{cr,sp}$		60	90	165	210	
¹⁾ In absence of other national regulations							
²⁾ Based on concrete strength as cylinder strength							
fischer Heavy-duty anchor TA M, TA M S, TA M T						Annex C 1	
Performances							
Characteristic tension resistance under static and quasi-static loads							
						Appendix 9 / 10	

Table C2.1: Characteristic values of **shear** resistance under static and quasi-static loads

Anchor size		TA M6	TA M8	TA M10	TA M12
Shear load without lever arm					
Characteristic resistance property class 8.8	$V_{Rk,s}^0$ [kN]	5,8	11,7	19,2	29,8
Partial factor	$\gamma_{Ms}^{1)}$	1,25			
Ductility factor	k_7 [-]	1,0			
Shear load with lever arm					
Characteristic bending moment property class 8.8	$M_{Rk,s}^0$ [Nm]	12	30	60	105
Partial factor	$\gamma_{Ms}^{1)}$ [-]	1,25			
Concrete pryout failure					
Ductility factor	k_7 [-]	1,0			
Factor	k_8	1,1	1,8	1,8	2,0
Concrete edge failure					
Effective length of the fastener	l_f [mm]	40	45	55	70
Outside diameter of fastener	d_{nom}	10	12	15	18

¹⁾ In absence of other national regulations

Table C2.2: Displacements under static and quasi static **tension** loads

Anchor size	TA M6	TA M8	TA M10	TA M12
Tension load in uncracked concrete [kN]	3,0	4,8	7,9	9,9
Displacements $\frac{\delta_{N0}}{\delta_{N\infty}}$ [mm]	0,7	0,7	1,2	1,2
	1,0	1,0	1,8	1,8

Table C2.3: Displacements under static and quasi static **shear** loads

Anchor size		TA M6	TA M8	TA M10	TA M12
Shear load in uncracked concrete	[kN]	3,3	6,7	11,0	17,0
Displacements	$\frac{\delta_{v0}}{\delta_{v\infty}}$ [mm]	2,1	1,9	3,1	3,3
		3,1	2,8	4,6	4,9

fischer Heavy-duty anchor TA M, TA M S, TA M T

Performances

Characteristic **shear** resistance under static and quasi-static loads
Displacements under tension and shear loads

Annex C 2

Appendix 10 / 10