


Riser clamp RCWR

RCWR riser pipe clamps for secure fixing of vertical riser pipes with UL certification

2

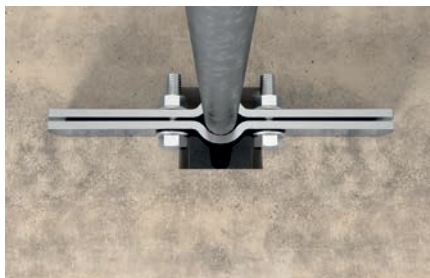

Floorcrossing downpipe

Applications

- Secure fixing of vertical pipelines.
- For use in dry interior areas.

Advantages

- Usable for all kinds of pipes.
- Suitable sizes for pipe diameters of ½" to 8".
- Easy installation using hexagonal screws and nuts.
- Safe for use thanks to UL certification.


Properties


- Material: steel Q235B
- Zinc plating: electro zinc-plated

Certificates




Installation RCWR

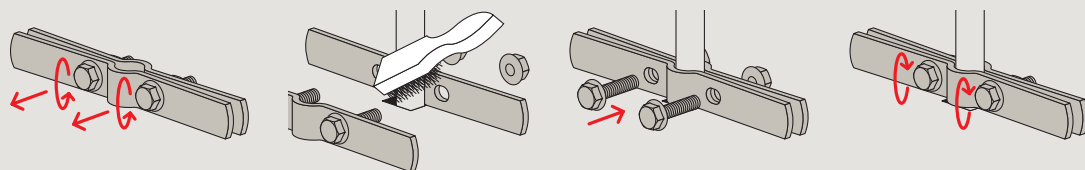



RCWR



RCWR

2

Technical data

		UL approval	Clamping range	Width	Width x thickness clamp band	Max. recommended transverse tensile load	Sales unit
Item	Item no.		D [mm]	B [mm]	b x s [mm]	$N_{\text{transverse}}$ [kN]	[pcs]
RCWR 1/2"	516673	Yes	22	215	25 x 5.0	3.3	35
RCWR 3/4"	516674	Yes	28	229	25 x 5.0	3.3	30
RCWR 1"	516675	Yes	34	230	25 x 5.0	3.3	25
RCWR 1 1/4"	516676	Yes	43	241	25 x 5.0	3.3	25
RCWR 1 1/2"	516677	Yes	49	251	25 x 3.0	3.3	25
RCWR 2"	516678	Yes	62	262	30 x 5.0	3.3	25
RCWR 2 1/2"	532380	Yes	75	281	30 x 5.0	3.7	25
RCWR 3"	516679	Yes	91	299	30 x 5.0	4.6	20
RCWR 4"	516680	Yes	116	329	38 x 6.0	6.6	12
RCWR 5"	516681	Yes	144	362	38 x 6.0	8.9	12
RCWR 6"	516682	Yes	171	394	50 x 6.0	11.5	8
RCWR 8"	516683	Yes	223	464	50 x 9.5	18.0	4